




PROBLEM SUMMARY

Sample Rating Trend

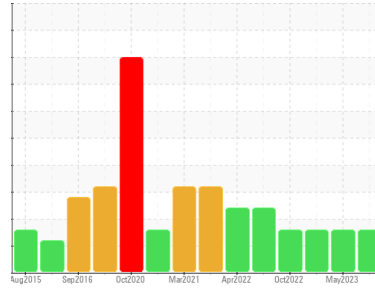

WEAR




Area
LADIG
 Machine Id
LADIG 2070 PP01

Component
Hydraulic System
 Fluid
KLUBER SUMMIT HYSYN FG 46 (40 GAL)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

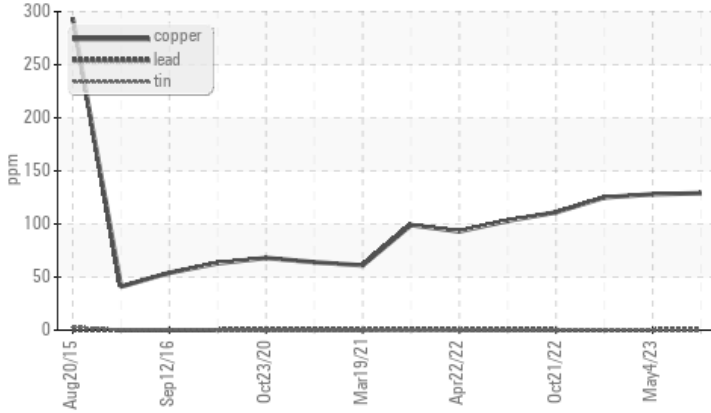

▲ Ferrous Alloys



RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185m	>20	▲ 158	▲ 167
Copper	ppm	ASTM D5185m	>20	▲ 129	▲ 128
					▲ 145
					▲ 125

Customer Id: FLAMONNC
 Sample No.: WC0668046
 Lab Number: 05930861
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

04 May 2023 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. The copper level is abnormal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



23 Jan 2023 Diag: Angela Borella

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. The copper level is abnormal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



21 Oct 2022 Diag: Angela Borella

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. The copper level is abnormal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

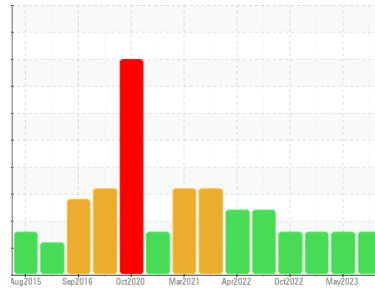

WEAR



Area
LADIG
 Machine Id
LADIG 2070 PP01

Component
Hydraulic System
 Fluid
KLUBER SUMMIT HYSYN FG 46 (40 GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The iron level is abnormal. The copper level is abnormal.

Contamination

The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0668046	WC0730491	WC0764194
Sample Date	Client Info		25 Jul 2023	04 May 2023	23 Jan 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Not Chngd	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		82	---	80
Iron	ppm	ASTM D5185m >20	▲ 158	▲ 167	▲ 145
Chromium	ppm	ASTM D5185m >20	<1	1	<1
Nickel	ppm	ASTM D5185m >20	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	0	0
Lead	ppm	ASTM D5185m >20	<1	0	0
Copper	ppm	ASTM D5185m >20	▲ 129	▲ 128	▲ 125
Tin	ppm	ASTM D5185m >20	0	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1
Barium	ppm	ASTM D5185m	0	0	1
Molybdenum	ppm	ASTM D5185m	0	<1	<1
Manganese	ppm	ASTM D5185m	1	1	1
Magnesium	ppm	ASTM D5185m	2	1	1
Calcium	ppm	ASTM D5185m	161	170	161
Phosphorus	ppm	ASTM D5185m	559	612	555
Zinc	ppm	ASTM D5185m	250	284	254
Sulfur	ppm	ASTM D5185m	3997	3903	3579

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	1	<1
Sodium	ppm	ASTM D5185m	3	2	0
Potassium	ppm	ASTM D5185m >20	0	<1	2
Water	%	ASTM D6304 >0.05	0.006	---	0.007
ppm Water	ppm	ASTM D6304 >500	68.8	---	75.3

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	1443	2466	2807
Particles >6µm	ASTM D7647	>2500	92	454	493
Particles >14µm	ASTM D7647	>320	11	31	41
Particles >21µm	ASTM D7647	>80	5	9	11
Particles >38µm	ASTM D7647	>20	0	0	2
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	18/14/11	18/16/12	19/16/13

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.30	0.27	0.28



OIL ANALYSIS REPORT

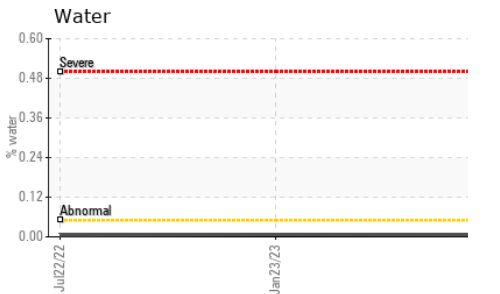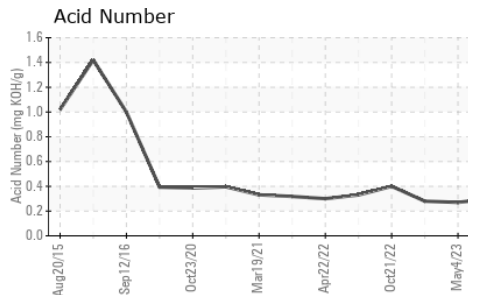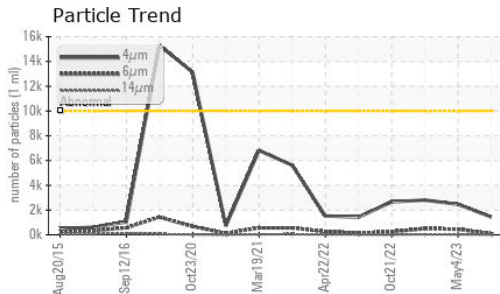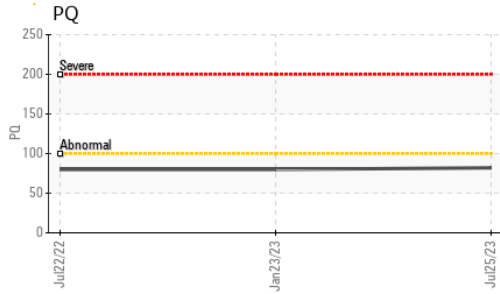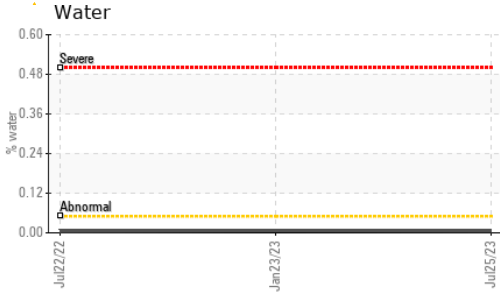


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.9	44.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

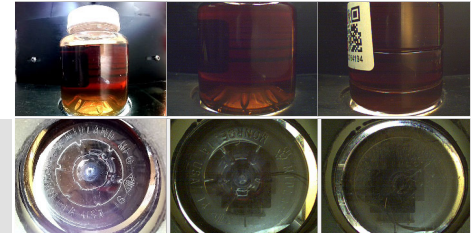


Bottom

GRAPHS


Ferrous Alloys

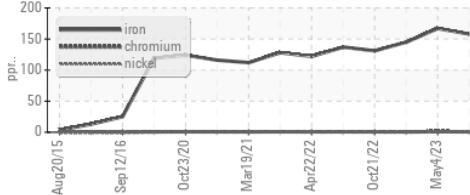


Non-ferrous Metals

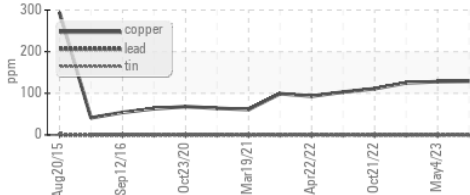


Viscosity @ 40°C

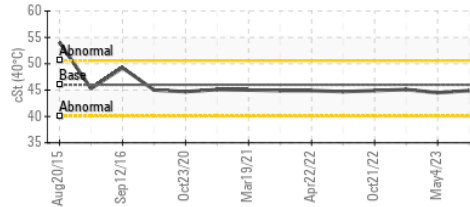

Particle Count

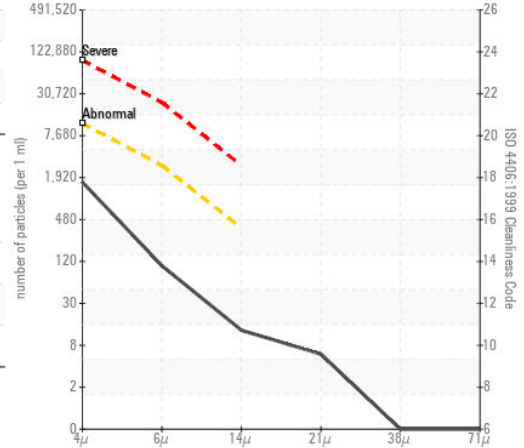

Acid Number

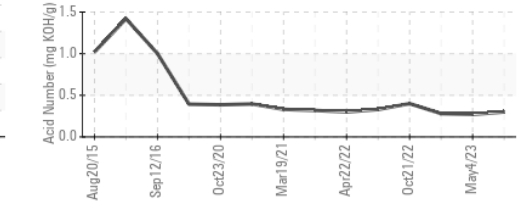

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0668046
 Lab Number : 05930861
 Unique Number : 10616132
 Test Package : IND 2 (Additional Tests: KF, PQ)

FLAKEBOARD ARAUCO - MDF
 985 CORINTH RD
 MONCURE, NC
 US

Contact: CHRISTOPHER JACKSON
 christopher.jackson@arauco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: