

PROBLEM SUMMARY

Sample Rating Trend

WATER


KAESER SM10 AIRCENTER 3097593 (S/N 1202)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY



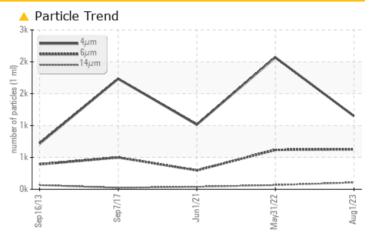

RECOMMENDATION

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

| PROBLEMATIC TEST RESULTS | | | | | | | | | | | |
|--------------------------|-----|--------------|---------|----------------|----------|--------|--|--|--|--|--|
| Sample Status | | | | ABNORMAL | NORMAL | NORMAL | | | | | |
| Water | % | ASTM D6304 | >0.05 | △ 0.209 | 0.018 | 0.013 | | | | | |
| ppm Water | ppm | ASTM D6304 | >500 | 2090 | 183.6 | 133.7 | | | | | |
| Particles >14µm | | ASTM D7647 | >80 | 106 | 66 | 39 | | | | | |
| Particles >21µm | | ASTM D7647 | >20 | △ 36 | 19 | 16 | | | | | |
| Particles >38μm | | ASTM D7647 | >4 | <u>^</u> 6 | 2 | 1 | | | | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | A 17/16/14 | 18/16/13 | 15/12 | | | | | |

Customer Id: PENELI Sample No.: KCPA004416 Lab Number: 05930884 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 ihester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

31 May 2022 Diag: Angela Borella

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



01 Jun 2021 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



07 Sep 2017 Diag: Don Baldridge

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



WATER

KAESER SM10 AIRCENTER 3097593 (S/N 1202)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Sep2013 | Sep2017 | Jun2021 May2022 | Aug2023 | |
|-----------------------|--------|--------------|------------|-----------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA004416 | KCP40731 | KCP33824 |
| Sample Date | | Client Info | | 01 Aug 2023 | 31 May 2022 | 01 Jun 2021 |
| Machine Age | hrs | Client Info | | 13395 | 10670 | 8254 |
| Oil Age | hrs | Client Info | | 0 | 2416 | 4305 |
| Oil Changed | | Client Info | | N/A | Changed | Changed |
| Sample Status | | | | ABNORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | <1 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | <1 | 0 |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >50 | 2 | 4 | 13 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185m | 90 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 90 | 33 | 28 | 14 |
| Calcium | ppm | ASTM D5185m | 2 | <1 | <1 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 4 | 6 | 5 |
| Zinc | ppm | ASTM D5185m | | 10 | 16 | 17 |
| Sulfur | ppm | ASTM D5185m | | 21450 | 20897 | 15374 |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | | 2 | 10 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |
| Water | % | ASTM D6304 | | △ 0.209 | 0.018 | 0.013 |
| ppm Water | ppm | ASTM D6304 | >500 | 2090 | 183.6 | 133.7 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 1148 | 2069 | 1014 |
| Particles >6µm | | ASTM D7647 | >1300 | 626 | 618 | 296 |
| Particles >14µm | | ASTM D7647 | >80 | 106 | 66 | 39 |
| Particles >21µm | | ASTM D7647 | >20 | △ 36 | 19 | 16 |
| Particles >38µm | | ASTM D7647 | >4 | <u>^</u> 6 | 2 | 1 |
| Particles >71µm | | ASTM D7647 | >3 | 1 | 1 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | 17/16/14 | 18/16/13 | 15/12 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| A at al Niconal (ANI) | | ACTA Doc := | 0.4 | 0.00 | 0.00 | 0.005 |



OIL ANALYSIS REPORT

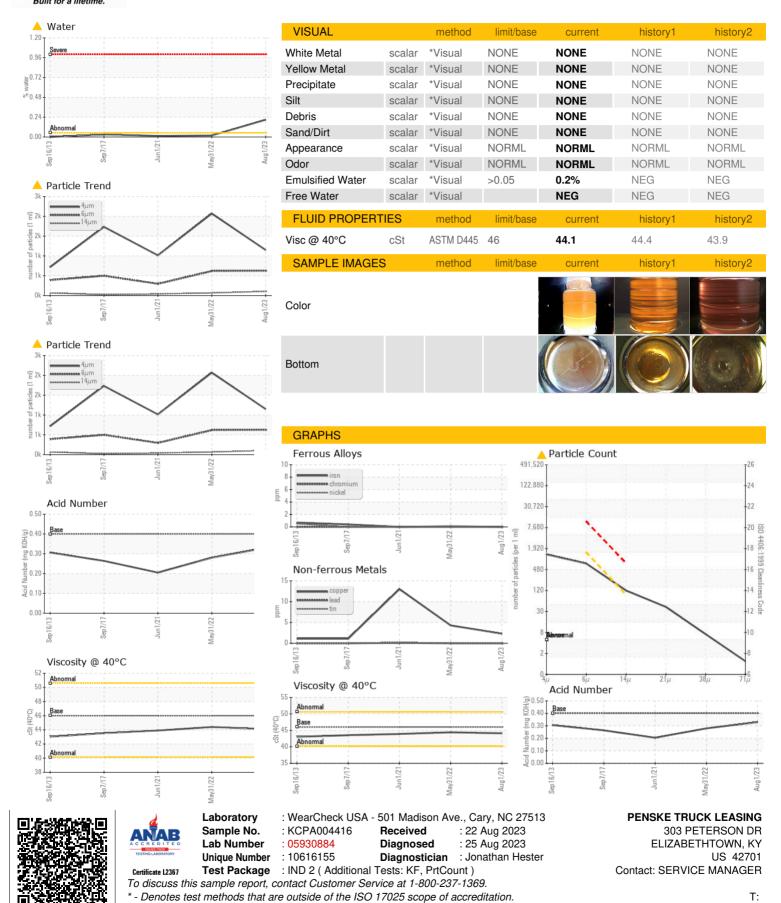

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: