

OIL ANALYSIS REPORT

KAESER BSD 60 7455829 (S/N 1028) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



		Λμ	2021	Jul2022 Aug202		
SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005923	KCP44037	KCP32996
Sample Date		Client Info		05 Aug 2023	22 Jul 2022	10 Apr 2021
Machine Age	hrs	Client Info		22962	14375	4130
Oil Age	hrs	Client Info		0	10245	4130
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	7	8	8
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	3	0	9
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		1	<1	3
Zinc	ppm	ASTM D5185m		0	0	4
Sulfur	ppm	ASTM D5185m		13432	13564	16002
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		2	<1	5
Potassium	ppm	ASTM D5185m	>20	0	0	4
Water	%	ASTM D6304	>0.05	0.004	0.011	0.005
ppm Water	ppm	ASTM D6304	>500	45.2	117.8	52.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		922	8499	861
Particles >6µm		ASTM D7647	>1300	297	4 2473	188
Particles >14µm		ASTM D7647	>80	30	<u> </u>	11
Particles >21µm		ASTM D7647	>20	7	4 25	2
Particles >38µm		ASTM D7647	>4	0	2	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/12	▲ 20/18/14	15/11
FLUID DEGRADA	TION _	method	limit/base	current	history1	history2
Acid Number (AN)				0.43	0.61	0.386

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.43 0.61 0.386


Report Id: RAICLA [WUSCAR] 05930888 (Generated: 08/23/2023 17:29:31) Rev: 1


Contact/Location: SERVICE MANAGER ? - RAICLA



OIL ANALYSIS REPORT





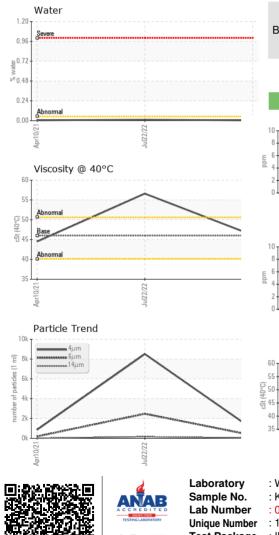

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.1	▲ 56.6	44.5
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						
Bottom						



