


OPEN PAIL



COMPONENT CONDITION SUMMARY

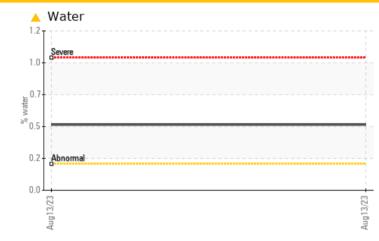

RECOMMENDATION

We advise that you check for the source of water entry. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL				
Water	%	ASTM D6304	>0.2	A 0.494				
ppm Water	ppm	ASTM D6304	>2000	4943.7				

Customer Id: WOOWOOMA Sample No.: RP05930904 Lab Number: 05930904 Test Package: IND 2

回路导出 To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com







RECOMMENDED AC	TIONS							
Action	Status	Date	Done By	Description				
Check Water Access			?	We advise that you check for the source of water entry.				

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



OPEN PAIL

Component Gearbox Fluid MOBIL GLYGOYLE 220 (--- GAL)

DIAGNOSIS

A Recommendation

We advise that you check for the source of water entry. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP05930904		
Sample Date		Client Info		13 Aug 2023		
Machine Age	wks	Client Info		2		
Oil Age	wks	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<1		
Chromium	ppm		>15	0		
Nickel	ppm	ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m	210	<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead		ASTM D5185m	>100	0		
Copper	ppm ppm	ASTM D5185m		<1		
Tin		ASTM D5185m	>200	<1		
Vanadium	ppm	ASTM D5185m	>20	<1		
Cadmium	ppm	ASTM D5185m		<1 0		
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		569		
Zinc	ppm	ASTM D5185m		0		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	13		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	5		
Water	%	ASTM D6304	>0.2	6 0.494		
ppm Water	ppm	ASTM D6304	>2000	4943.7		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.30		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual	20.L		RED-DENTON ·	MOOMOOM
	ooului	10000				Page 3 of



OIL ANALYSIS REPORT



Contact/Location: FRED DENTON - WOOWOOMA

F: