




# OIL ANALYSIS REPORT

Sample Rating Trend

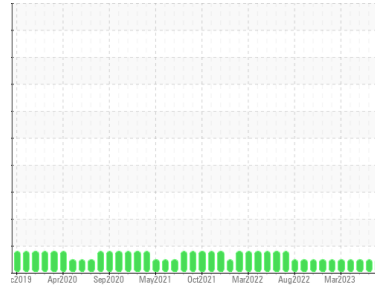

**NORMAL**

Area  
**OKLAHOMA CITY**  
 Machine Id  
**2018 FREIGHTLINER 7729**  
 Component  
**Diesel Engine**  
 Fluid  
**SHELL Rotella T5 15W-40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0820380</b>	WC0791747	WC0791744
Sample Date	Client Info		<b>04 Aug 2023</b>	10 Jun 2023	05 May 2023
Machine Age	hrs	Client Info	<b>3361</b>	3281	3227
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >65	<b>22</b>	22	20
Chromium	ppm	ASTM D5185m >5	<b>3</b>	4	3
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >35	<b>12</b>	11	12
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	2	0
Copper	ppm	ASTM D5185m >180	<b>33</b>	37	49
Tin	ppm	ASTM D5185m >8	<b>4</b>	4	4
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>61</b>	79	73
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>75</b>	81	82
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>207</b>	234	204
Calcium	ppm	ASTM D5185m	<b>1954</b>	2211	2063
Phosphorus	ppm	ASTM D5185m	<b>939</b>	1056	1019
Zinc	ppm	ASTM D5185m	<b>1245</b>	1377	1288
Sulfur	ppm	ASTM D5185m	<b>3362</b>	3824	3263

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m	<b>3</b>	4	<1
Potassium	ppm	ASTM D5185m >20	<b>22</b>	20	22

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	10.0	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.4</b>	23.2	22.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.9</b>	17.4	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 10	<b>5.6</b>	6.0	6.0







# OIL ANALYSIS REPORT

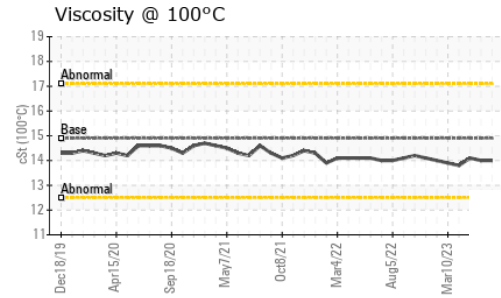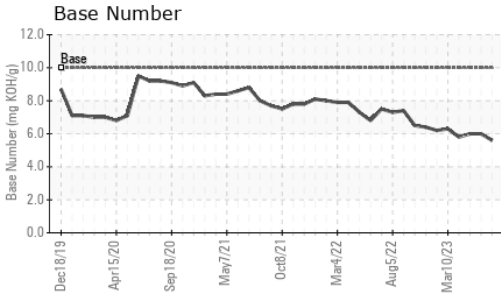

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	<b>14.0</b>	14.0	14.1

## GRAPHS

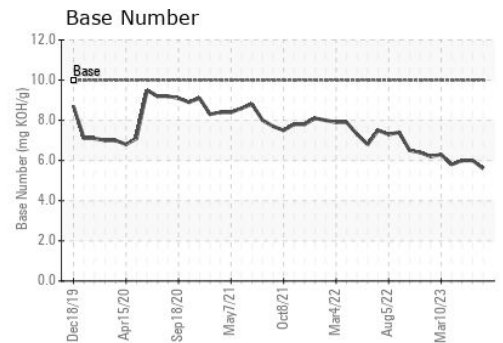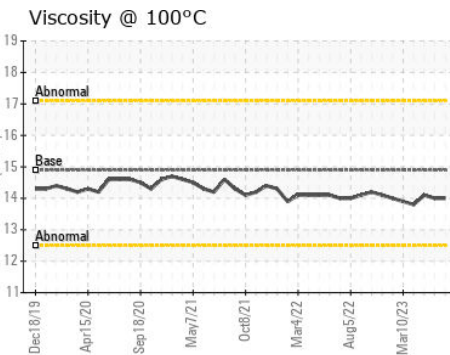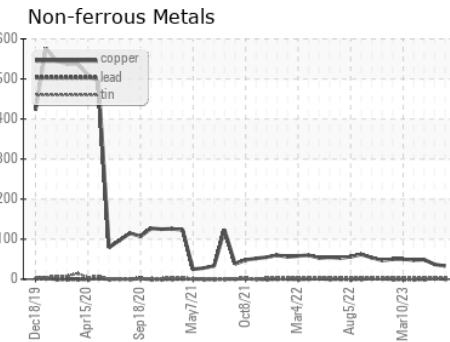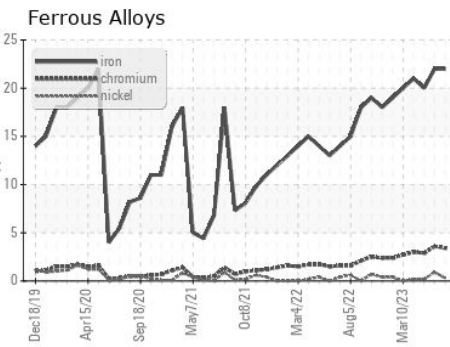

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0820380 **Received** : 22 Aug 2023  
**Lab Number** : 05931343 **Diagnosed** : 23 Aug 2023  
**Unique Number** : 10616614 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: RICK SCHMIDT  
 r.schmidt@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: