




OIL ANALYSIS REPORT

Sample Rating Trend

WATER



Area
PLOGER
 Machine Id
2227 - PLOGER
 Component
Transmission
 Fluid
NOT GIVEN (--- GAL)

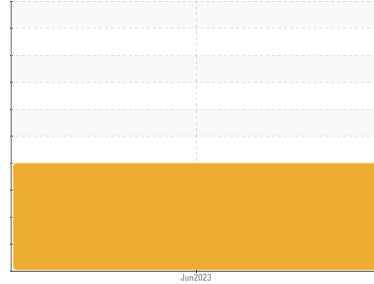

DIAGNOSIS

Recommendation

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid. There is a light concentration of water present in the fluid.

Fluid Condition

The AN level is above the recommended limit.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843162	---	---
Sample Date	Client Info		28 Jun 2023	---	---
Machine Age	mls Client Info		145198	---	---
Oil Age	mls Client Info		0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>200	65	---	---
Chromium	ppm ASTM D5185m	>10	1	---	---
Nickel	ppm ASTM D5185m		<1	---	---
Titanium	ppm ASTM D5185m		<1	---	---
Silver	ppm ASTM D5185m		0	---	---
Aluminum	ppm ASTM D5185m	>50	12	---	---
Lead	ppm ASTM D5185m	>50	0	---	---
Copper	ppm ASTM D5185m	>200	87	---	---
Tin	ppm ASTM D5185m	>10	0	---	---
Vanadium	ppm ASTM D5185m		0	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		143	---	---
Barium	ppm ASTM D5185m		0	---	---
Molybdenum	ppm ASTM D5185m		0	---	---
Manganese	ppm ASTM D5185m		18	---	---
Magnesium	ppm ASTM D5185m		<1	---	---
Calcium	ppm ASTM D5185m		189	---	---
Phosphorus	ppm ASTM D5185m		1333	---	---
Zinc	ppm ASTM D5185m		10	---	---
Sulfur	ppm ASTM D5185m		1595	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>50	12	---	---
Sodium	ppm ASTM D5185m		2	---	---
Potassium	ppm ASTM D5185m	>20	<1	---	---
Water	% ASTM D6304	>0.1	▲ 0.112	---	---
ppm Water	ppm ASTM D6304	>1000	▲ 1127.1	---	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 97609	---	---
Particles >6µm	ASTM D7647	>2500	▲ 7792	---	---
Particles >14µm	ASTM D7647	>320	102	---	---
Particles >21µm	ASTM D7647	>80	19	---	---
Particles >38µm	ASTM D7647	>20	0	---	---
Particles >71µm	ASTM D7647	>4	0	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 24/20/14	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045		▲ 4.60	---	---



OIL ANALYSIS REPORT

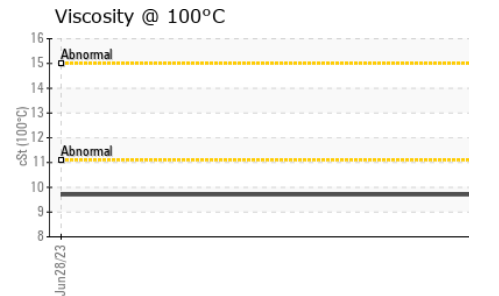
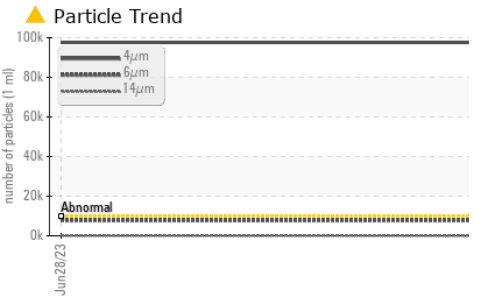
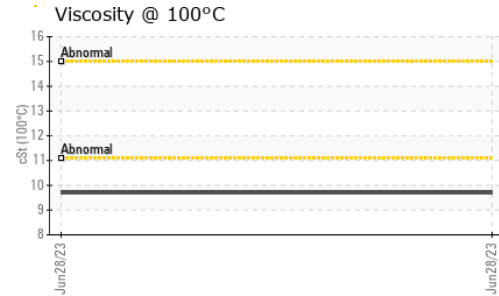
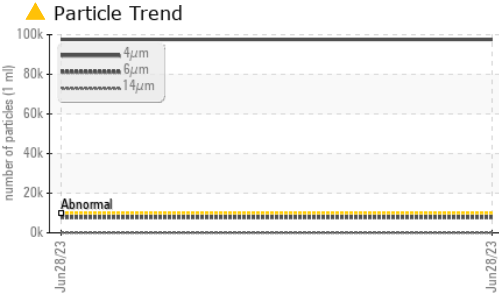
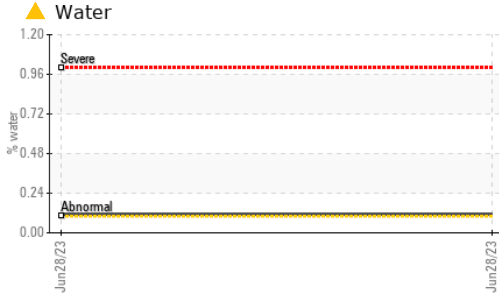


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	56.7	---	---
Visc @ 100°C	cSt	ASTM D445	9.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270	156	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

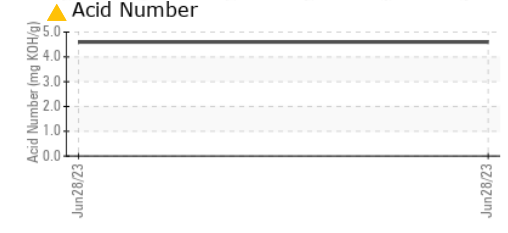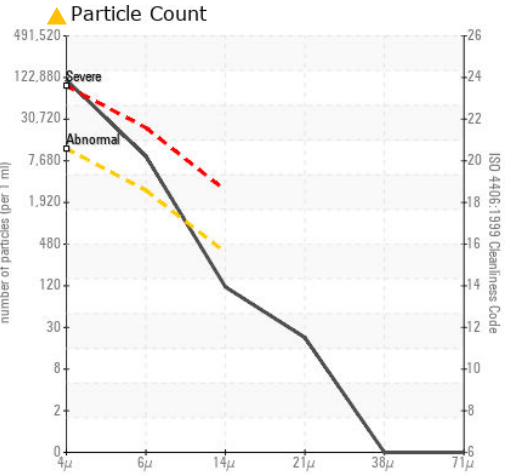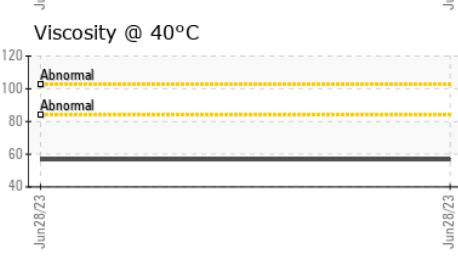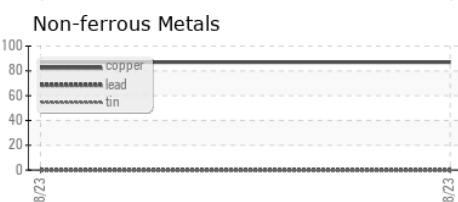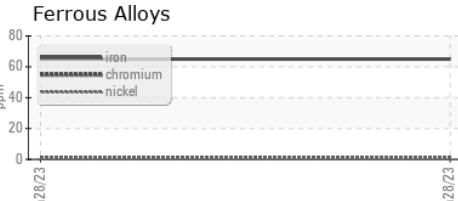

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843162 **Received** : 22 Aug 2023
Lab Number : **05931532** **Diagnosed** : 25 Aug 2023
Unique Number : 10616803 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)