




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
KANSAS/44
Machine Id
53.160L [KANSAS^44]
Component
Right Chain Drive
Fluid
MOBIL MOBILTRANS HD 50 (3 GAL)

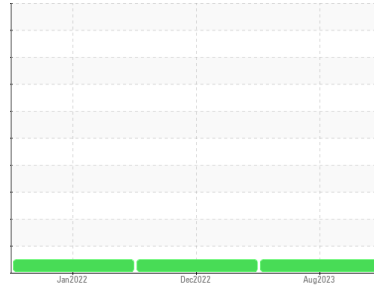

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0821643	WC0741848	WC0621146
Sample Date	Client Info		16 Aug 2023	07 Dec 2022	14 Jan 2022
Machine Age	hrs	Client Info	841	360	3
Oil Age	hrs	Client Info	841	360	0
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	210	117	14
Chromium	ppm	ASTM D5185m >10	1	<1	<1
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m	1	1	2
Lead	ppm	ASTM D5185m	0	1	0
Copper	ppm	ASTM D5185m	3	3	<1
Tin	ppm	ASTM D5185m	0	<1	0
Antimony	ppm	ASTM D5185m >5	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	81	71	64
Barium	ppm	ASTM D5185m	47	47	70
Molybdenum	ppm	ASTM D5185m	38	39	35
Manganese	ppm	ASTM D5185m	3	2	<1
Magnesium	ppm	ASTM D5185m	458	481	474
Calcium	ppm	ASTM D5185m	1540	1588	1528
Phosphorus	ppm	ASTM D5185m	858	828	855
Zinc	ppm	ASTM D5185m	1028	1104	1029
Sulfur	ppm	ASTM D5185m	3701	3484	2538

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	51	37	11
Sodium	ppm	ASTM D5185m	4	4	3
Potassium	ppm	ASTM D5185m >20	5	3	3

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	MODER	MODER
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	MODER	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG






OIL ANALYSIS REPORT

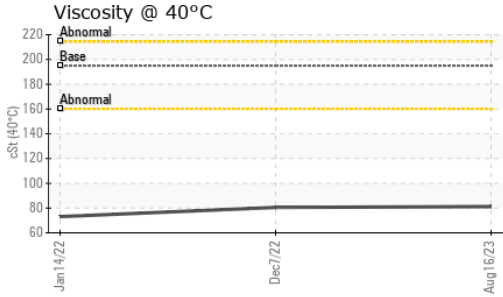

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	81.2	80.5	73.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

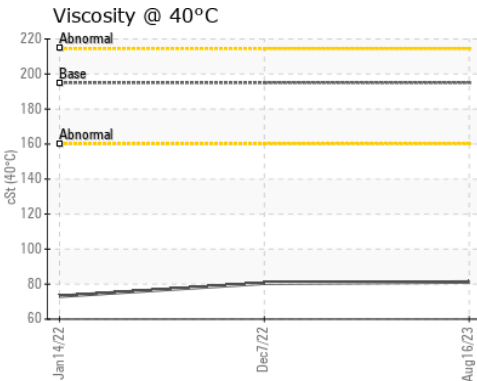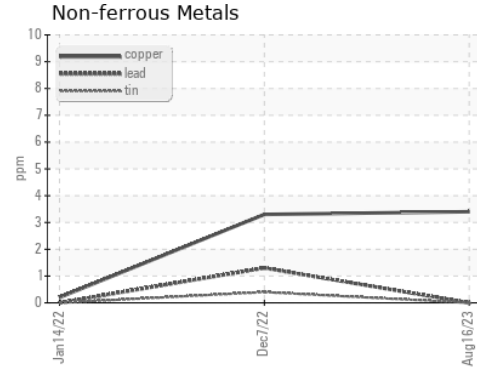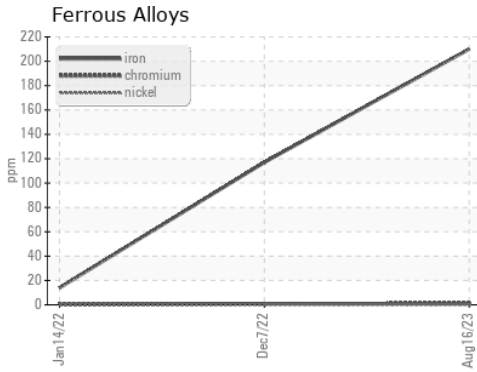

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0821643 **Received** : 22 Aug 2023
Lab Number : **05931766** **Diagnosed** : 24 Aug 2023
Unique Number : 10617037 **Diagnostician** : Don Baldrige
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net
 T: (316)943-6491
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)