


PROBLEM SUMMARY

Area ENGINE ROOM Machine Id MYCUM C05-1 (S/N 2519367 / C990480F-2) Component

Refrigeration Compressor

FRICK COMPRESSOR OIL #3 (--- PNT)

COMPONENT CONDITION SUMMARY

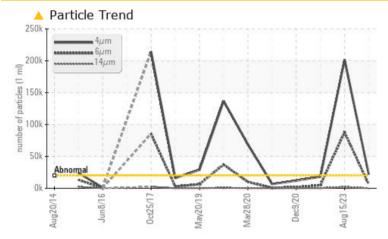

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ABNORMAL	ABNORMAL	ATTENTION			
Particles >4µm	ASTM D7647	>20000	<u> </u>	🔺 201970	18219			
Particles >6µm	ASTM D7647	>2500	<u> </u>	A 87786	4835			
Oil Cleanliness	ISO 4406 (c)	>21/18/15	<u> </u>	2 5/24/18	1 /19/15			


Customer Id: PERPERUSP Sample No.: USP245929 Lab Number: 05932140 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

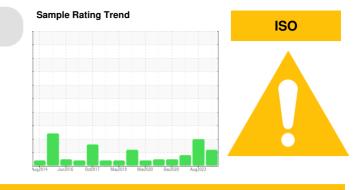

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

15 Aug 2023 Diag: Doug Bogart



We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

24 May 2022 Diag: Doug Bogart

09 Dec 2020 Diag: Jonathan Hester

Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view repor







Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Area ENGINE ROOM Machine Id MYCUM C05-1 (S/N 2519367 / C990480F-2) Component

Refrigeration Compressor

FRICK COMPRESSOR OIL #3 (--- PNT)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

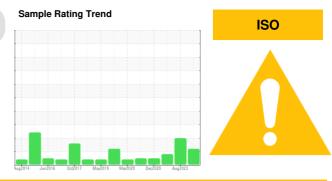

SAMPLE INFORM		method	limit/base	current	history1	history2
			minubase			
Sample Number		Client Info		USP245929	USP0000509	USP235742
Sample Date		Client Info		19 Aug 2023	15 Aug 2023	24 May 2022
Machine Age	hrs	Client Info		5397	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	2	14	<1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	0	<1
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		<1	0	<1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		16	10	62
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	2
Sodium	ppm	ASTM D5185m		0	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.01	0.00	0.004	0.001
ppm Water	ppm	ASTM D6304		0.00	43.2	8.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	21782	▲ 201970	18219
Particles >6μm		ASTM D7647	>2500	6392	▲ 87786	48 35
Particles >14μm		ASTM D7647	>320	146	A 2261	259
Particles >21µm		ASTM D7647	>80	16	<u> </u>	46
Particles >38μm		ASTM D7647	>20	1	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/18/15	A 22/20/14	▲ 25/24/18	1 21/19/15
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)			minubase	0.015	0.014	0.012
ACIO INUMOEL (AIN)	HU h U H / 0	AD UV U9/4		0.015	0.014	0.012

Acid Number (AN) mg KOH/g

mg KOH/g ASTM D974

0.015 0.014 0.012

Report Id: PERPERUSP [WUSCAR] 05932140 (Generated: 08/24/2023 13:51:39) Rev: 1

Contact/Location: JAMES EAST - PERPERUSP



Acid Number

0.05

(B/H0) Ê0.03 E 0.02 Dig 0.0

0.00

0.03

0.0

°6 0.0

0.0

0.00.

85

80

40°C)

570

65

60

OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

method

*Visual

*Visual

*Visua

*Visual

*Visual

*Visua

*Visual

*Visual

scalar *Visual

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.01

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML


NORML


curren

NEG


NEG

65.8

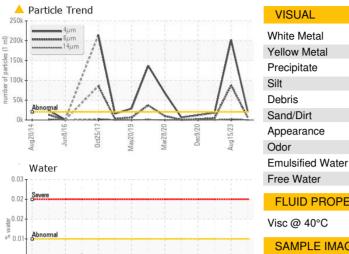

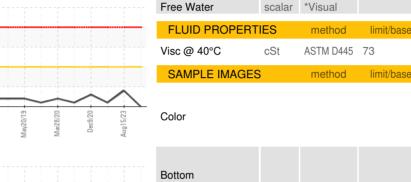

VISUAL

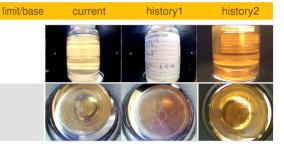

history1

NONE

NONE

NONE

LIGHT

NONE

NONE

NORML

NORML

history

NFG

NEG

66.4

history2

NONE

NONE

NONE

NONE

NONE

NONE

NORML


NORML

history2

NEG

NEG

67.8

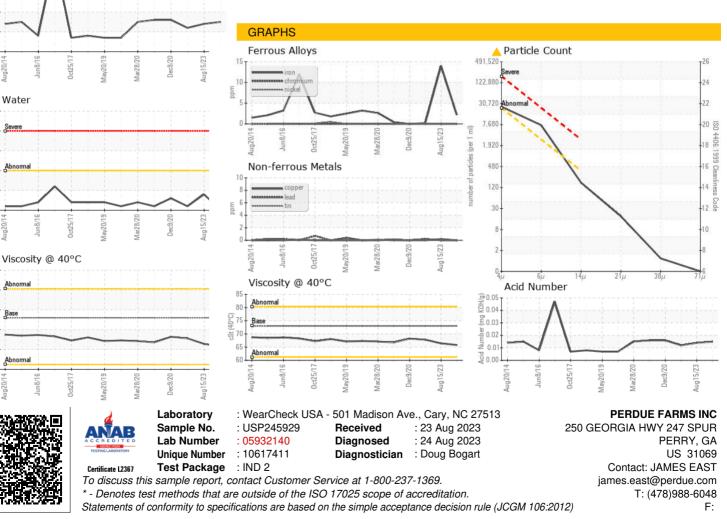

Contact/Location: JAMES EAST - PERPERUSP