


Area  
**PO-4030 [A13000316]**  
 Machine Id  
**INGERSOLL RAND CBV422799 - FEDEX GROUND KENNESAW**  
 Component  
**Compressor**

Sample Rating Trend




**WATER**

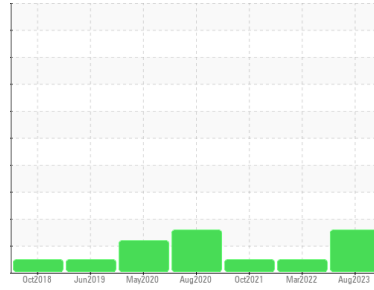

## COMPONENT CONDITION SUMMARY

### ▲ Water

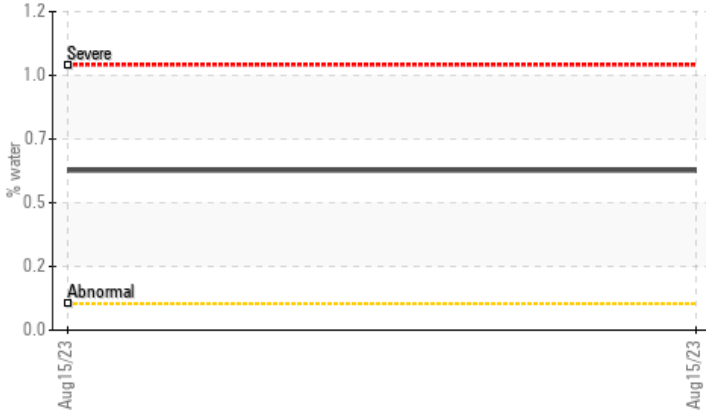

## RECOMMENDATION

We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	NORMAL	NORMAL
Water	%	ASTM D6304	>0.1	▲ <b>0.602</b>	---	---
ppm Water	ppm	ASTM D6304	>1000	▲ <b>6020</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	▲ <b>0.2%</b>	NEG	NEG

Customer Id: UCPATLIT  
 Sample No.: UCP05932173  
 Lab Number: 05932173  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Water Drain-off	---	---	?	We advise that you follow the water drain-off procedure for this component.

## HISTORICAL DIAGNOSIS

### 15 Mar 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 28 Oct 2021 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 31 Aug 2020 Diag: Doug Bogart

DEGRADATION




We recommend that you drain the oil from the component if this has not already been done. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The oil viscosity is higher than normal. The AN level is above the recommended limit.

view report



Area  
**PO-4030 [A13000316]**  
 Machine Id  
**INGERSOLL RAND CBV422799 - FEDEX GROUND KENNESAW**  
 Component  
**Compressor**

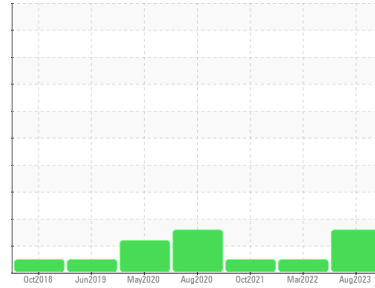

**DIAGNOSIS**

**Recommendation**

We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is a moderate concentration of water present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>UCP05932173</b>	UCP05498757	UCP05389857
Sample Date	Client Info	<b>15 Aug 2023</b>	15 Mar 2022	28 Oct 2021
Machine Age	hrs	<b>46599</b>	37248	34340
Oil Age	hrs	<b>0</b>	0	31972
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Not Chngd
Sample Status		<b>ATTENTION</b>	NORMAL	NORMAL

**WEAR METALS**

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	<b>4</b>	2	<1
Chromium ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel ppm	ASTM D5185m	<b>0</b>	0	0
Titanium ppm	ASTM D5185m	<b>0</b>	0	0
Silver ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	0
Lead ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	0
Copper ppm	ASTM D5185m >50	<b>4</b>	1	<1
Tin ppm	ASTM D5185m >15	<b>&lt;1</b>	1	0
Antimony ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 0	<b>0</b>	3	0
Barium ppm	ASTM D5185m 0	<b>335</b>	406	455
Molybdenum ppm	ASTM D5185m 0.1	<b>0</b>	0	0
Manganese ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Calcium ppm	ASTM D5185m 0	<b>4</b>	4	3
Phosphorus ppm	ASTM D5185m 225	<b>16</b>	10	5
Zinc ppm	ASTM D5185m 0	<b>64</b>	58	51
Sulfur ppm	ASTM D5185m 1193	<b>519</b>	337	235




**CONTAMINANTS**

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium ppm	ASTM D5185m	<b>47</b>	44	47
Potassium ppm	ASTM D5185m >20	<b>7</b>	<1	2
Water %	ASTM D6304 >0.1	<b>▲ 0.602</b>	---	---
ppm Water	ASTM D6304 >1000	<b>▲ 6020</b>	---	---

**FLUID DEGRADATION**

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.136	<b>0.37</b>	0.30	0.313


# OIL ANALYSIS REPORT

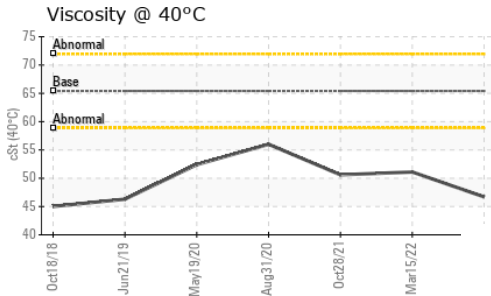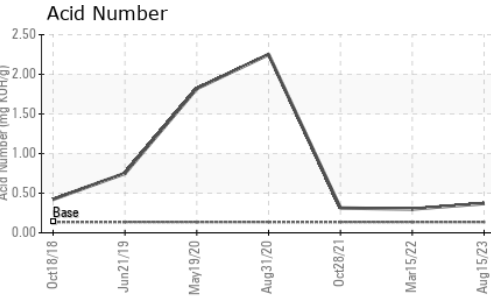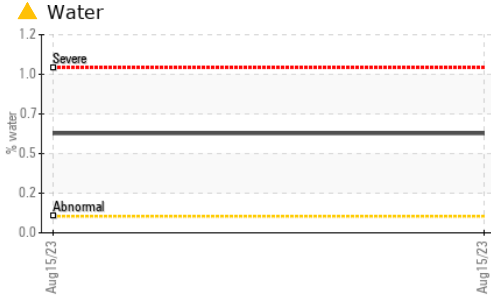





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.42	46.7	51.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

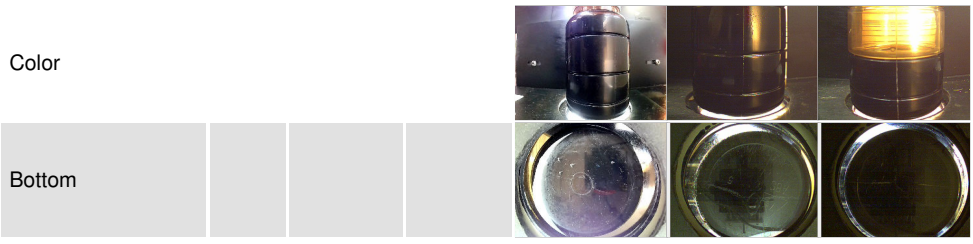

## GRAPHS

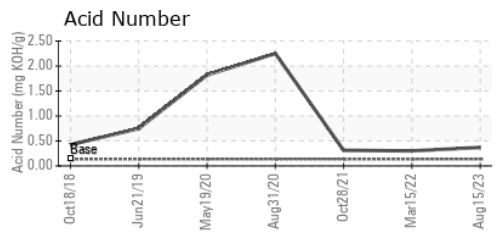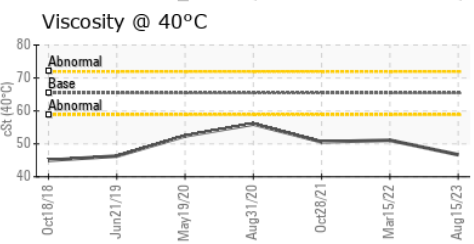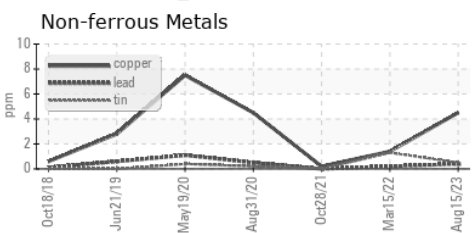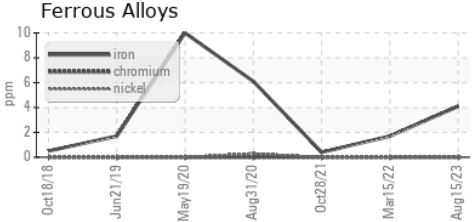

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCP05932173 **Received** : 23 Aug 2023  
**Lab Number** : 05932173 **Diagnosed** : 24 Aug 2023  
**Unique Number** : 10617444 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF )

**PATTONS INC - LITHONIA**  
 6709 TRIBBLE STREET  
 LITHONIA, GA  
 US 30058  
 Contact: CHRISSY HARBIN  
 chrissey.harbin@pattonsinco.com  
 T: (770)484-9226  
 F: (770)482-5522

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)