


PROBLEM SUMMARY

Sample Rating Trend ISO ISO ISO

JOY JOY 1

Component Compressor Fluid PETRO CANADA COMPRO XL-R COMPRESSOR FLUID (8 GAL)

COMPONENT CONDITION SUMMARY

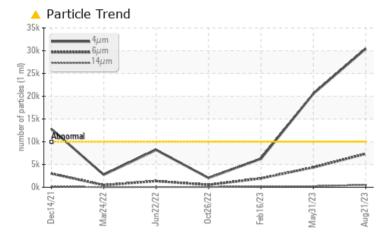

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ABNORMAL	ABNORMAL	NORMAL			
Particles >4µm	ASTM D7647 >	>10000	<u> </u>	<u> </u>	6252			
Particles >6µm	ASTM D7647 >	>2500	A 7360	4 370	1950			
Particles >14µm	ASTM D7647 >	>320	<u> </u>	231	209			
Particles >21µm	ASTM D7647 >	>80	<u> </u>	29	64			
Oil Cleanliness	ISO 4406 (c) >	>20/18/15	<u> </u>	<u> </u>	20/18/15			

Customer Id: CARNASUS Sample No.: WC0542676 Lab Number: 05932194 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED AC	TIONS			
Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS



31 May 2023 Diag: Doug Bogart

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




view report

16 Feb 2023 Diag: Angela Borella



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

26 Oct 2022 Diag: Doug Bogart












OIL ANALYSIS REPORT

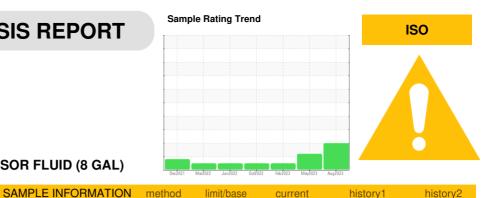

JOY JOY 1

Component Compressor

Fluid

PETRO CANADA COMPRO XL-R COMPRESSOR FLUID (8 GAL)

DIAGNOSIS Recommendation We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	VIATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0542676	WC0542677	KFS0000440
Sample Date		Client Info		21 Aug 2023	31 May 2023	16 Feb 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	2	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	0
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m	-	<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppin				-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	460	503	534	478
Zinc	ppm	ASTM D5185m		0	0	<1
Sulfur	ppm	ASTM D5185m		421	470	448
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	16	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	0
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	A 30429	🔺 20542	6252
Particles >6µm		ASTM D7647	>2500	<u> </u>	4 370	1950
Particles >14µm		ASTM D7647	>320	<u> </u>	231	209
Particles >21µm		ASTM D7647	>80	<u> </u>	29	64
Particles >38μm		ASTM D7647	>20	2	1	6
Particles >71µm		ASTM D7647		0	0	1
Oil Cleanliness		ISO 4406 (c)	>20/18/15	A 22/20/16	22/19/15	20/18/15
FLUID DEGRADA		method	limit/base		history1	
				current		history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.02	0.07	0.13	0.03



OIL ANALYSIS REPORT

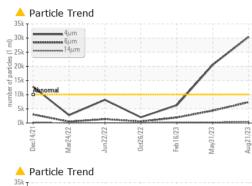

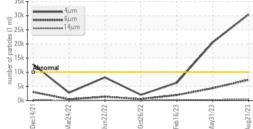

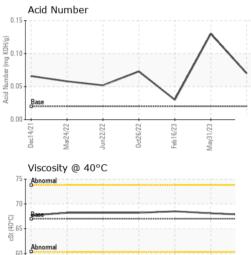

55


Dec1

Aar24/22

VISUAL method limit/base history1 history2 current NONE NONE NONE White Metal *Visual NONE scalar Yellow Metal NONE NONE NONE NONE scalar *Visual Precipitate scalar *Visua NONE NONE NONE NONE Silt scalar *Visual NONE NONE NONE NONE Debris *Visual NONE LIGHT LIGHT NONE scalar NONE Sand/Dirt scalar *Visual NONE NONE NONE NORML Appearance *Visual NORML NORML NORML scalar NORML NORML NORML Odor scalar *Visual NORML *Visual **Emulsified Water** scalar >0.1 NEG NEG NEG Free Water scalar *Visual NEG NEG NEG FLUID PROPERTIES method limit/base current history history2 Visc @ 40°C cSt ASTM D445 67.0 67.79 68.1 68.5 SAMPLE IMAGES method limit/base history1 history2 current Color



Bottom

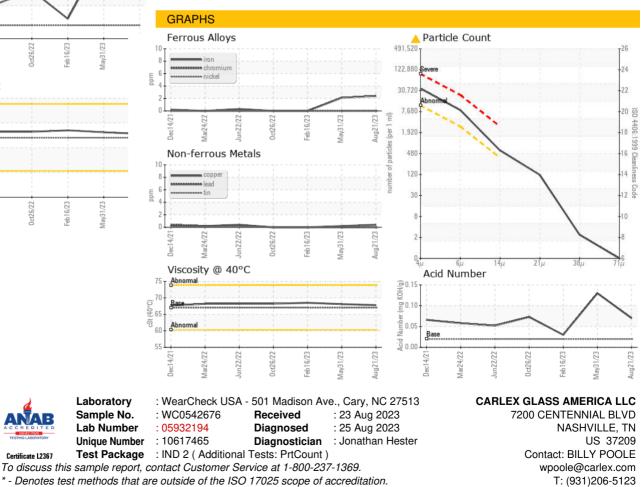

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Feb 16/23

Submitted By: Kenneth Humphries

Page 4 of 4

F: