




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**Detroit**  
 Machine Id  
**[Detroit] Oil - Port Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**MOBIL 15W40 (150 GAL)**

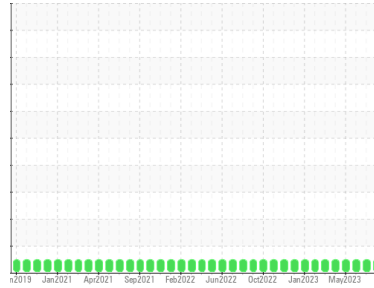

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor. ( Customer Sample Comment: Chris wray )

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0769392</b>	WC0769395	WC0735756
Sample Date	Client Info			<b>14 Aug 2023</b>	17 Jul 2023	19 Jun 2023
Machine Age	hrs Client Info			<b>14802</b>	14351	13876
Oil Age	hrs Client Info			<b>14802</b>	0	13876
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>60</b>	59	56
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	2	<1
Lead	ppm	ASTM D5185m	>18	<b>11</b>	11	9
Copper	ppm	ASTM D5185m	>80	<b>11</b>	12	13
Tin	ppm	ASTM D5185m	>14	<b>2</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>84</b>	83	89
Barium	ppm	ASTM D5185m		<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>57</b>	60	58
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>941</b>	929	984
Calcium	ppm	ASTM D5185m		<b>1954</b>	1775	1749
Phosphorus	ppm	ASTM D5185m		<b>1063</b>	1081	1055
Zinc	ppm	ASTM D5185m		<b>1378</b>	1359	1334
Sulfur	ppm	ASTM D5185m		<b>3811</b>	3358	3364



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	4	3
Sodium	ppm	ASTM D5185m	>118	<b>4</b>	<1	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.4</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>14.2</b>	14.1	14.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>28.9</b>	28.6	29.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>32.9</b>	32.6	33.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.21</b>	7.51	8.10







# OIL ANALYSIS REPORT

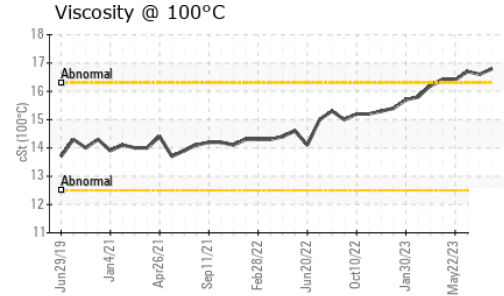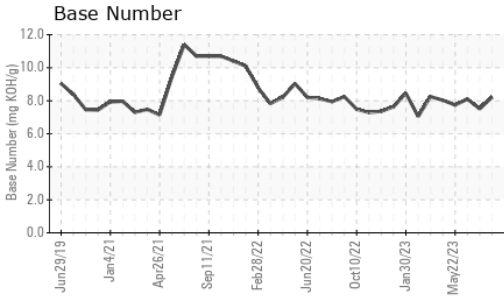

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>16.8</b>	16.6	16.7

## GRAPHS

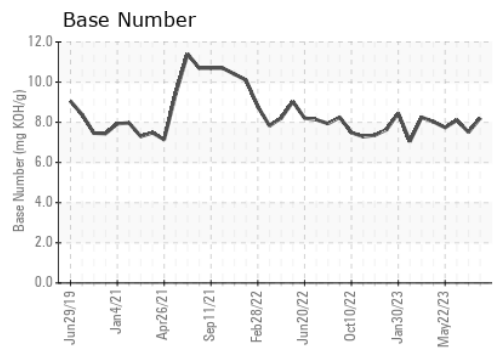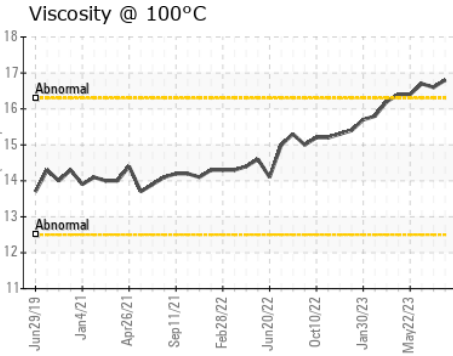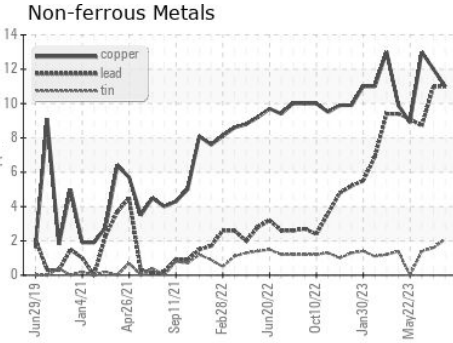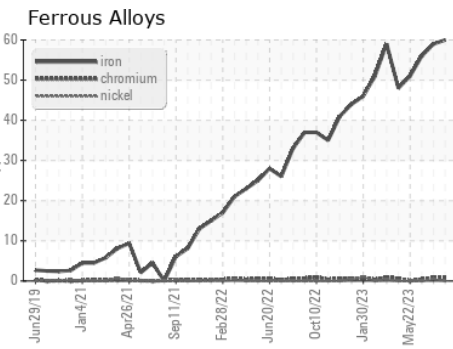

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0769392 **Received** : 23 Aug 2023  
**Lab Number** : 05932231 **Diagnosed** : 24 Aug 2023  
**Unique Number** : 10617502 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)