




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

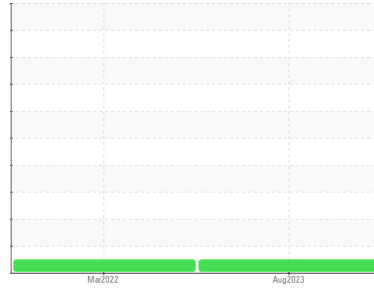

Machine Id  
**MB9996L**

Component  
**Hydraulic System**

Fluid  
**PHILLIPS 66 Powerflow NZ AW46 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0848727</b>	WC0653892	---
Sample Date	Client Info	<b>11 Aug 2023</b>	11 Mar 2022	---
Machine Age	hrs Client Info	<b>0</b>	0	---
Oil Age	hrs Client Info	<b>0</b>	0	---
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>4</b>	2	---
Chromium ppm ASTM D5185m	>20	<b>1</b>	0	---
Nickel ppm ASTM D5185m	>20	<b>0</b>	<1	---
Titanium ppm ASTM D5185m		<b>0</b>	<1	---
Silver ppm ASTM D5185m		<b>0</b>	<1	---
Aluminum ppm ASTM D5185m	>20	<b>0</b>	<1	---
Lead ppm ASTM D5185m	>20	<b>&lt;1</b>	0	---
Copper ppm ASTM D5185m	>20	<b>6</b>	7	---
Tin ppm ASTM D5185m	>20	<b>0</b>	<1	---
Vanadium ppm ASTM D5185m		<b>0</b>	0	---
Cadmium ppm ASTM D5185m		<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>0</b>	<1	---
Barium ppm ASTM D5185m		<b>0</b>	1	---
Molybdenum ppm ASTM D5185m		<b>1</b>	0	---
Manganese ppm ASTM D5185m		<b>0</b>	0	---
Magnesium ppm ASTM D5185m		<b>5</b>	0	---
Calcium ppm ASTM D5185m		<b>65</b>	45	---
Phosphorus ppm ASTM D5185m		<b>335</b>	251	---
Zinc ppm ASTM D5185m		<b>421</b>	333	---
Sulfur ppm ASTM D5185m		<b>810</b>	787	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>&lt;1</b>	1	---
Sodium ppm ASTM D5185m		<b>0</b>	0	---
Potassium ppm ASTM D5185m	>20	<b>1</b>	0	---

## VISUAL


method	limit/base	current	history1	history2
White Metal scalar *Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal scalar *Visual	NONE	<b>NONE</b>	NONE	---
Precipitate scalar *Visual	NONE	<b>NONE</b>	NONE	---
Silt scalar *Visual	NONE	<b>NONE</b>	NONE	---
Debris scalar *Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt scalar *Visual	NONE	<b>NONE</b>	NONE	---
Appearance scalar *Visual	NORML	<b>NORML</b>	NORML	---
Odor scalar *Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water scalar *Visual	>0.05	<b>NEG</b>	NEG	---
Free Water scalar *Visual		<b>NEG</b>	NEG	---

## FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C cSt ASTM D445	46	<b>45.4</b>	46.3	---






# OIL ANALYSIS REPORT

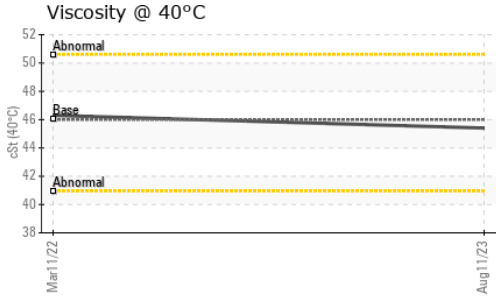

	SAMPLE IMAGES	method	limit/base	current	history1	history2
Color						no image
Bottom						no image

## GRAPHS

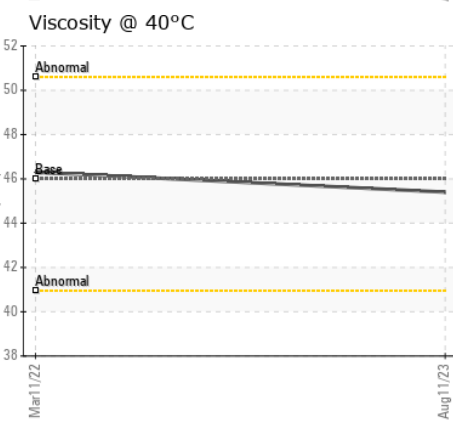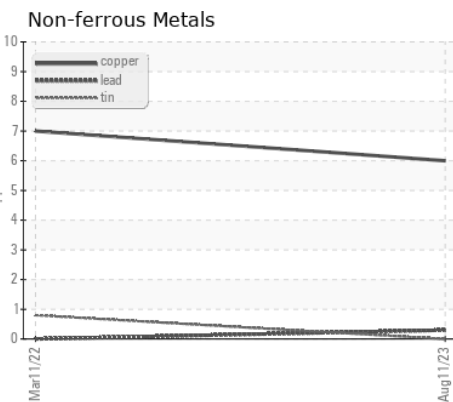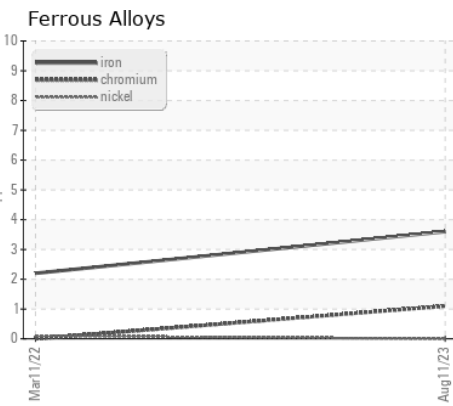

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0848727 **Received** : 23 Aug 2023  
**Lab Number** : 05932490 **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10617761 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 1

**SUMIRIKO TENNESSEE INC**  
 150 HESTER LN  
 TAZEWELL, TN  
 US 37879  
 Contact: JEREMY COLLINS  
 jcollins@us.sumiriko.com  
 T: (423)626-8805  
 F: (423)626-2065

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)