

OIL ANALYSIS REPORT

Sample Rating Trend







Component **Hydraulic System** AW HYDRAULIC OIL ISO 68 (--- QTS)

Machine Id MB9639

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|--------------------------------|--------|-------------|------------|--------------------------|--------------|-------------------|
| Sample Number | | Client Info | | WC0848757 | | |
| Sample Date | | Client Info | | 11 Aug 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 0 | | |
| Chromium | ppm | ASTM D5185m | >20 | 0 | | |
| Nickel | ppm | ASTM D5185m | >20 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 0 | | |
| Lead | ppm | ASTM D5185m | >20 | <1 | | |
| Copper | ppm | ASTM D5185m | >20 | <1 | | |
| Tin | ppm | ASTM D5185m | >20 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 5 | 0 | | |
| Barium | ppm | ASTM D5185m | 5 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | 5 | <1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | 25 | <1 | | |
| Calcium | ppm | ASTM D5185m | 200 | 36 | | |
| Phosphorus | ppm | ASTM D5185m | 300 | 83 | | |
| Zinc | ppm | ASTM D5185m | 370 | 48 | | |
| Sulfur | ppm | ASTM D5185m | 2500 | 251 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | | >15 | 5 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | | |
| Free Water | scalar | *Visual | | NEG | | |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C 2:32:45) Rev: 1 | cSt | ASTM D445 | 68 C | 65.7 Contact/Location | : JEREMY COL | LINS - DTRTAZ |

Report Id: DTRTAZ [WUSCAR] 05932494 (Generated: 08/25/2023 12:32:45) Rev: 1



OIL ANALYSIS REPORT

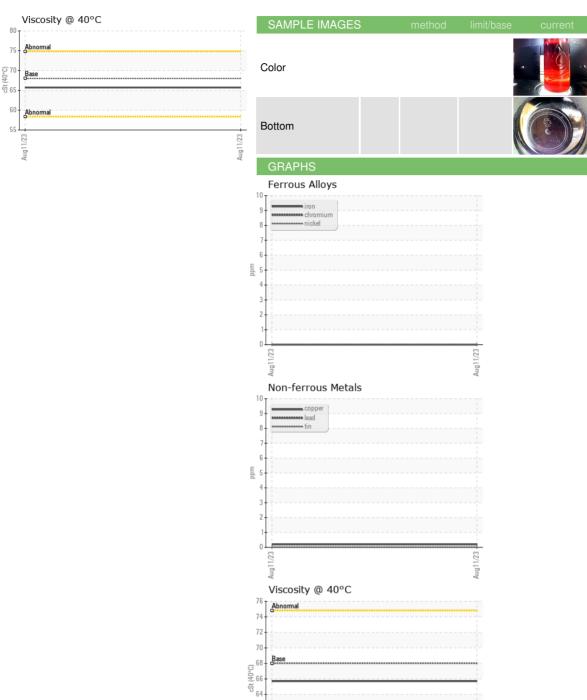

Aug11/23

: WC0848757

: 05932494

Laboratory Sample No.

Lab Number



 Unique Number
 : 10617765
 Diagnostician
 : Jonathan Hester

 Certificate L2367
 Test Package
 : IND 1

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Diagnosed

Aug11/23 -

: 23 Aug 2023

: 25 Aug 2023

SUMIRIKO TENNESSEE INC 150 HESTER LN TAZEWELL, TN US 37879 Contact: JEREMY COLLINS jcollins@us.sumiriko.com T: (423)626-8805 2) F: (423)626-2065

no image

no image

no image

no image