


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

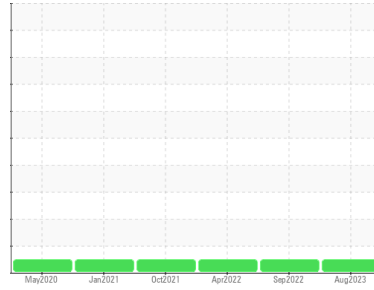

Machine Id  
**HITACHI 300LC 1FFDDR70TKF840603**

Component  
**Diesel Engine**

Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>JR0167113</b>   | JR0146202   | JR0129277   |
| Sample Date        | Client Info |             |            | <b>22 Aug 2023</b> | 20 Sep 2022 | 27 Apr 2022 |
| Machine Age        | hrs         | Client Info |            | <b>3541</b>        | 2400        | 1972        |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 500         | 500         |
| Oil Changed        | Client Info |             |            | <b>Not Changed</b> | Changed     | Changed     |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>10</b>    | 7        | 8        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>2</b>     | 0        | <1       |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Silver      | ppm | ASTM D5185m | >3         | <b>3</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>9</b>     | 3        | 4        |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | <1       | 1        |
| Copper      | ppm | ASTM D5185m | >330       | <b>6</b>     | 1        | 2        |
| Tin         | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | <1       | 1        |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b>   | ---      | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |



| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>375</b>   | 165      | 233      |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>347</b>   | 186      | 236      |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m |            | <b>1036</b>  | 779      | 788      |
| Calcium    | ppm | ASTM D5185m |            | <b>1780</b>  | 1112     | 1452     |
| Phosphorus | ppm | ASTM D5185m |            | <b>1147</b>  | 712      | 861      |
| Zinc       | ppm | ASTM D5185m |            | <b>1358</b>  | 855      | 1031     |
| Sulfur     | ppm | ASTM D5185m |            | <b>4557</b>  | 3050     | 2607     |

| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>10</b> | 8        | 7        |
| Sodium       | ppm | ASTM D5185m |            | <b>2</b>  | 2        | <1       |
| Potassium    | ppm | ASTM D5185m | >20        | <b>2</b>  | 2        | 0        |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.1</b>  | 0.2      | 0.2      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>7.0</b>  | 8.3      | 8.4      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>19.6</b> | 22.0     | 22.6     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.5</b> | 16.4     | 16.8     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 13.6       | <b>9.2</b>  | 10.7     | 10.6     |









# OIL ANALYSIS REPORT

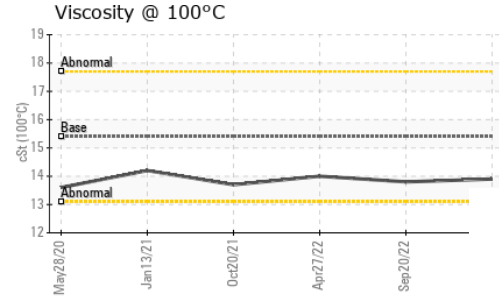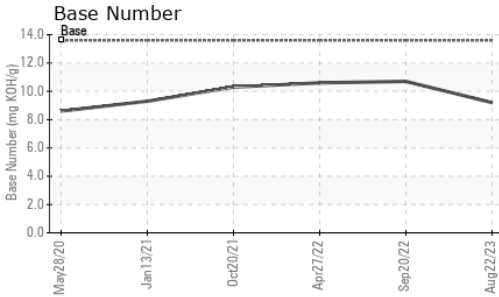

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>13.9</b> | 13.8     | 14.0 |

### GRAPHS

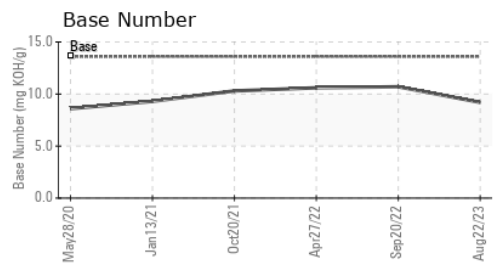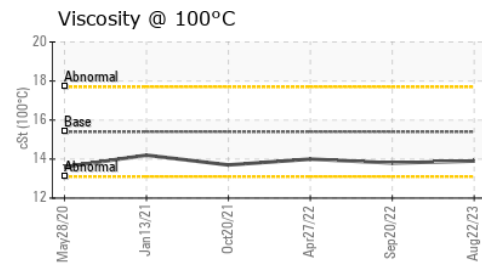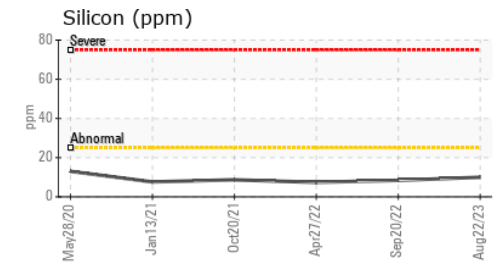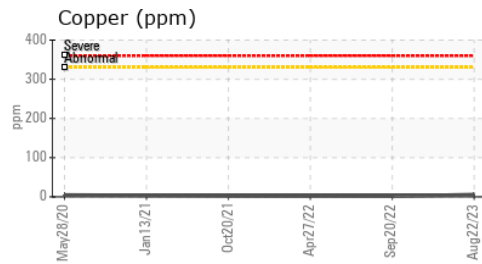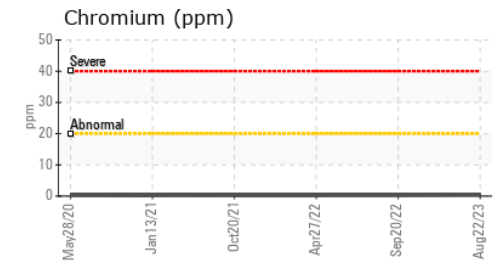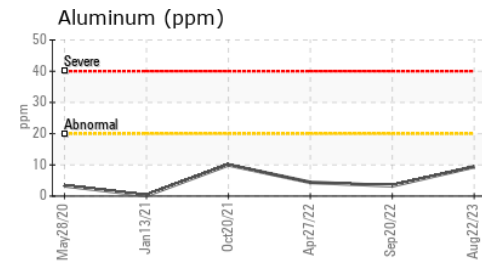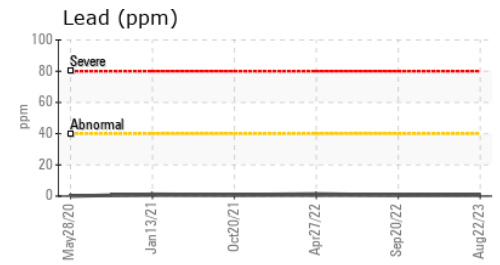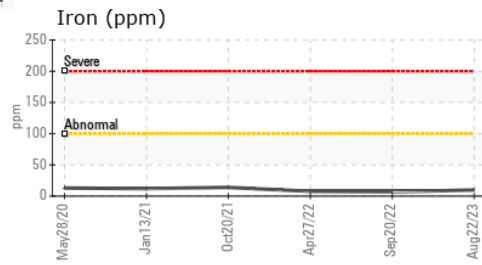

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0167113 **Received** : 23 Aug 2023  
**Lab Number** : 05932538 **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10617809 **Diagnostician** : Sean Felton  
**Test Package** : MOBCE ( Additional Tests: TBN )

**JRE - FISHERSVILLE**  
 98 EXPO ROAD  
 FISHERSVILLE, VA  
 US 22939  
 Contact: MIKE JENKINS  
 MIKE.JENKINS@JAMESRIVEREQUIPMENT.COM  
 T: (540)292-3494  
 F: (540)337-1495

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)