

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id IMM-9 / 61098 (S/N MSG406273) Component

Hydraulic System Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		JUI2017 Janz		019 Feb2020 Mar2021 Jun2021 Jul2		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0033928	RP0021094	RP0016212
Sample Date		Client Info		08 Aug 2023	31 Jul 2022	20 Jun 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	17	12	7
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	10	9	10
Tin	ppm	ASTM D5185m	>20	0	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		1	0	3
Calcium	ppm	ASTM D5185m		121	111	125
Phosphorus	ppm	ASTM D5185m		426	411	426
Zinc	ppm	ASTM D5185m		619	555	626
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>15	2	10	2
Sodium	ppm	ASTM D5185m	210	<1	0	1
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D5185III		0.036	0.040	0.041
ppm Water	ppm	ASTM D6304		364.5	406.9	413.9
FLUID CLEANLIN		method	limit/base		history1	history2
Particles >4µm		ASTM D7647	>5000	588	5584	1766
Particles >6µm		ASTM D7647		59	1064	321
Particles >14µm		ASTM D7647	>160	6	73	25
Particles >21µm		ASTM D7647		2	13	10
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647 ASTM D7647		0	1	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	0 16/13/10	A 20/17/13	18/16/12
FLUID DEGRADA	TION_	method	limit/base		history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.52	1.29	1.227
	ing nonly	, 10 HM 20040		1.52	1.20	1.661




Water

0.60


OIL ANALYSIS REPORT



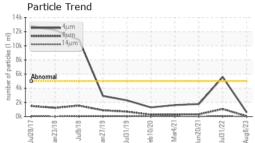

White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		44.8	44.7	44.7
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						

Bottom

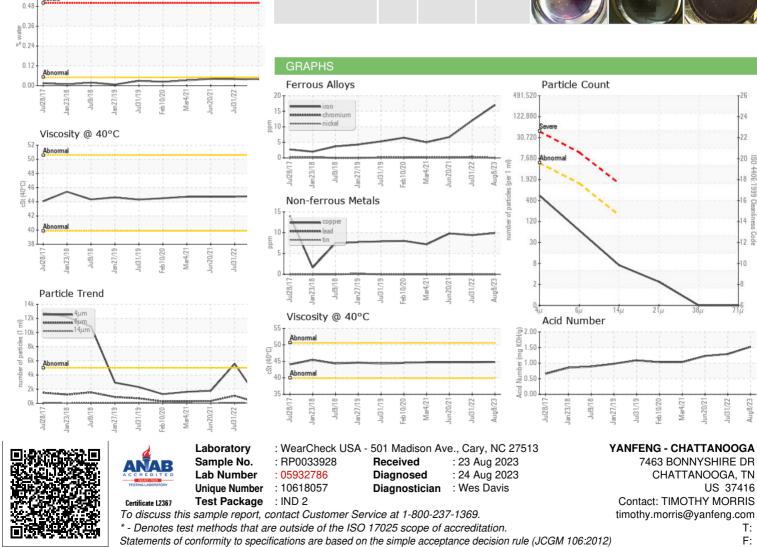

Contact/Location: TIMOTHY MORRIS - YANCHA