

OIL ANALYSIS REPORT

Area CHEMLUBE 629 [1665229] Machine Id L3-WIN MAIN DRIVE GB CARRIER DRUM - PFNONWOVENS Component

Gearbox

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend



NORMAL


| SAMPLE INFORM | NATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|-------------|------------|-----------------|----------|----------|
| Sample Number | | Client Info | | UCH05932918 | | |
| Sample Date | | Client Info | | 17 Jul 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 30 | | |
| Chromium | ppm | ASTM D5185m | >15 | <1 | | |
| Nickel | ppm | ASTM D5185m | >15 | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | | |
| Lead | ppm | ASTM D5185m | >100 | 0 | | |
| Copper | ppm | | >200 | 0 | | |
| Tin | ppm | ASTM D5185m | >25 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 3.1 | 13 | | |
| Barium | ppm | ASTM D5185m | 0.1 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | 1 | | |
| Manganese | ppm | ASTM D5185m | 0.7 | <1 | | |
| Magnesium | ppm | ASTM D5185m | 0 | 2 | | |
| Calcium | ppm | ASTM D5185m | 0 | 29 | | |
| Phosphorus | ppm | ASTM D5185m | 1642 | 359 | | |
| Zinc | ppm | ASTM D5185m | 0 | 7 | | |
| Sulfur | ppm | ASTM D5185m | 377 | 18722 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 4 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.154 | 0.80 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | | |
| Free Water | scalar | *Visual | | NEG | | |
| (E-42-20) Boy: 1 | | | Cantaa | // agation: DVA | | |

Report Id: UCPROWES [WUSCAR] 05932918 (Generated: 08/24/2023 15:42:30) Rev: 1

Contact/Location: RYAN HUNGARTER - UCPROWES



OIL ANALYSIS REPORT

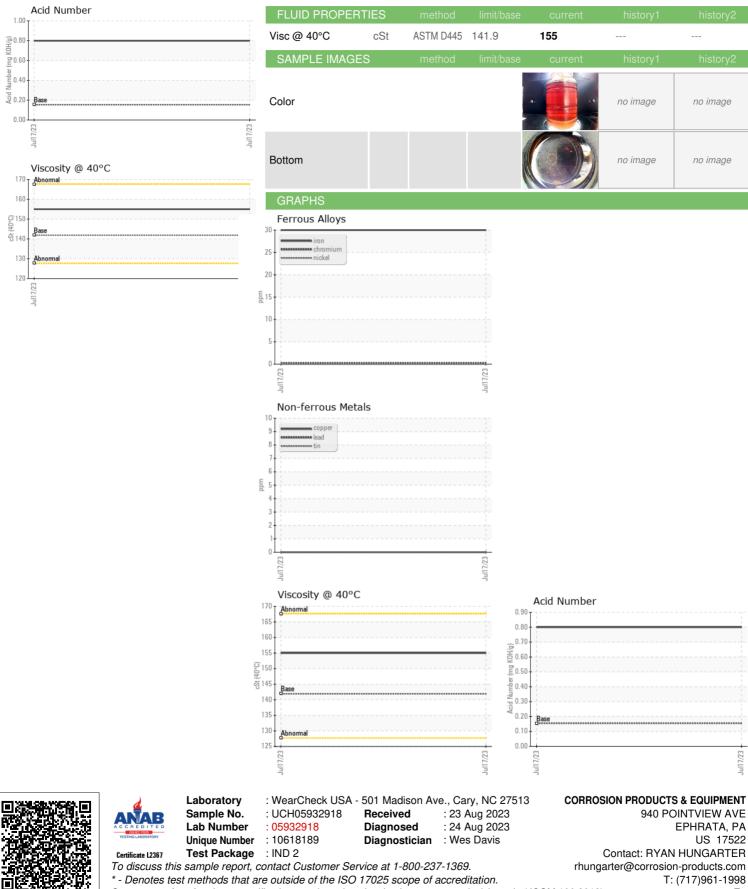

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: RYAN HUNGARTER - UCPROWES

US 17522

F:

no image

no image