




# OIL ANALYSIS REPORT

Sample Rating Trend

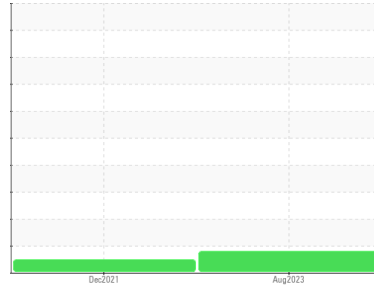

**WEAR**



Machine Id  
**214781**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL 15W40 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>IL0023668</b>	IL0023825	---
Sample Date	Client Info		<b>23 Aug 2023</b>	16 Dec 2021	---
Machine Age	mls	Client Info	<b>0</b>	87860	---
Oil Age	mls	Client Info	<b>0</b>	14540	---
Oil Changed	Client Info		<b>N/A</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>46</b>	76	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>▲ 25</b>	23	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>0</b>	2	---
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185m	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	27	---
Barium	ppm	ASTM D5185m	<b>0</b>	1	---
Molybdenum	ppm	ASTM D5185m	<b>54</b>	38	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>923</b>	479	---
Calcium	ppm	ASTM D5185m	<b>1146</b>	1631	---
Phosphorus	ppm	ASTM D5185m	<b>1031</b>	698	---
Zinc	ppm	ASTM D5185m	<b>1267</b>	871	---
Sulfur	ppm	ASTM D5185m	<b>3866</b>	2195	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	7	---
Sodium	ppm	ASTM D5185m >118	<b>6</b>	3	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	38	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	14.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.1</b>	25.8	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.7</b>	29.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.9</b>	7.1	---




# OIL ANALYSIS REPORT


▲ Aluminum (ppm)

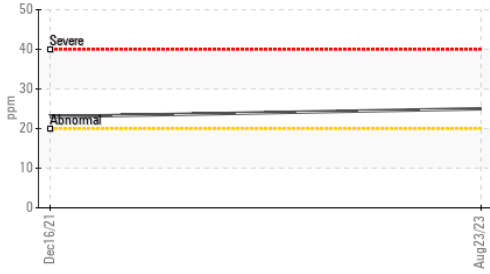

Base Number

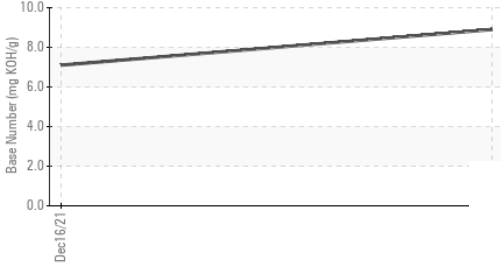

Viscosity @ 100°C

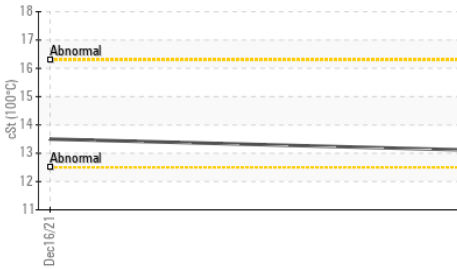


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.1	13.5	---

## GRAPHS


Iron (ppm)

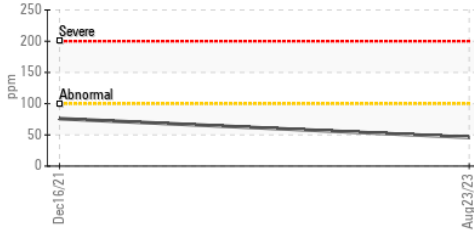

Lead (ppm)

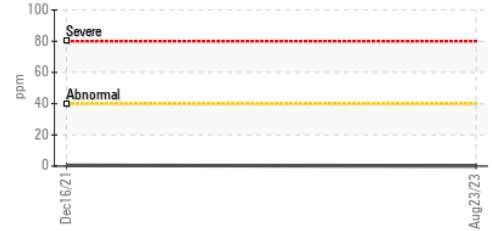


▲ Aluminum (ppm)

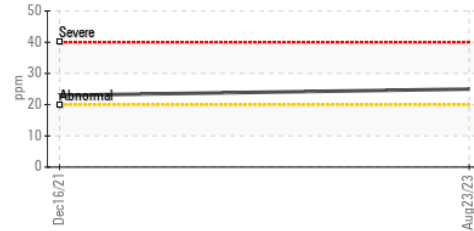


Chromium (ppm)



Copper (ppm)

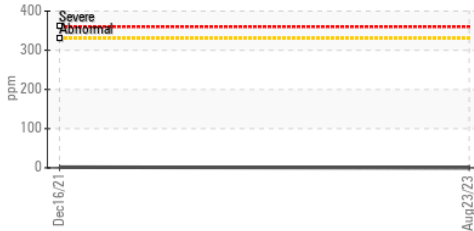


Silicon (ppm)

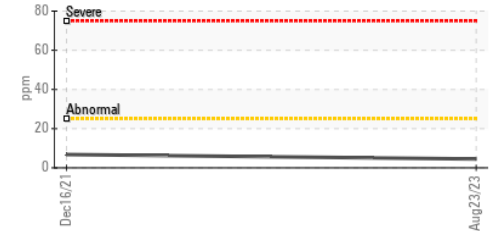

Viscosity @ 100°C



Base Number

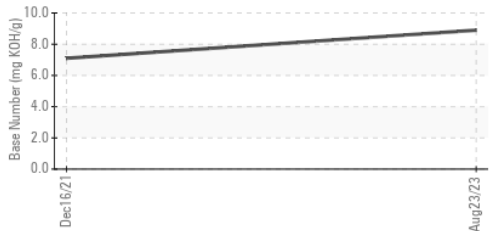

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0023668 **Received** : 24 Aug 2023  
**Lab Number** : 05933174 **Diagnosed** : 25 Aug 2023  
**Unique Number** : 10618445 **Diagnostician** : Sean Felton  
**Test Package** : MOB1+

**RUSH TRUCK CENTER - CHICAGO IDEALEASE**  
 4655 SOUTH CENTRAL AVENUE  
 CHICAGO, IL  
 US 60638

Contact: MIKE LINLEY  
 linleym@rushtruckcenters.com

T: (708)496-7500  
 F: (708)496-8818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)