




PROBLEM SUMMARY


Area
ROTORS
 Machine Id
SAVAGE PRESS DIE CAST (S/N 6405)
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

Sample Rating Trend

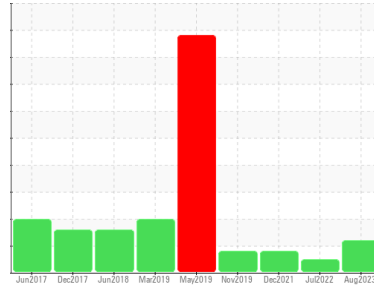

COMPONENT CONDITION SUMMARY

▲ Particle Trend

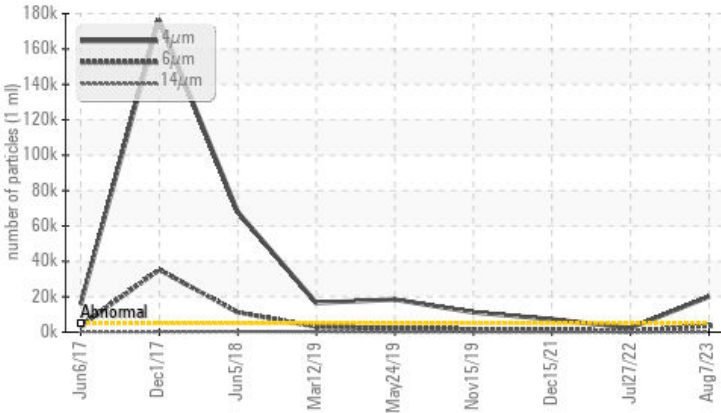

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	ATTENTION
Particles >4µm	ASTM D7647	>5000	▲ 20050	2319	▲ 7286
Particles >6µm	ASTM D7647	>1300	▲ 3578	392	▲ 1489
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/19/14	18/16/13	▲ 20/18/14

Customer Id: SIECIN
 Sample No.: WC0764845
 Lab Number: 05933479
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

27 Jul 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



15 Dec 2021 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



15 Nov 2019 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

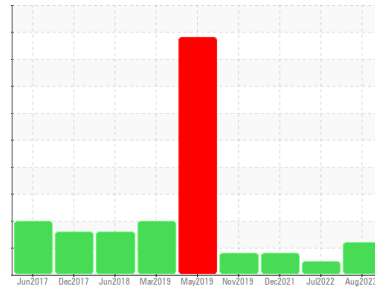

ISO



Area
ROTORS
 Machine Id
SAVAGE PRESS DIE CAST (S/N 6405)

Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0764845	WC0629146	WC0629142
Sample Date	Client Info	07 Aug 2023	27 Jul 2022	15 Dec 2021
Machine Age	mths	Client Info	0	0
Oil Age	mths	Client Info	0	0
Oil Changed	Client Info	Not Chngd	N/A	N/A
Sample Status		ABNORMAL	NORMAL	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	<1
Chromium	ppm	ASTM D5185m >20	0	0
Nickel	ppm	ASTM D5185m >20	0	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	0	<1
Aluminum	ppm	ASTM D5185m >20	0	0
Lead	ppm	ASTM D5185m >20	0	0
Copper	ppm	ASTM D5185m >20	1	2
Tin	ppm	ASTM D5185m >20	0	0
Antimony	ppm	ASTM D5185m	---	0
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	2
Barium	ppm	ASTM D5185m 5	2	0
Molybdenum	ppm	ASTM D5185m 5	0	0
Manganese	ppm	ASTM D5185m	0	0
Magnesium	ppm	ASTM D5185m 25	<1	0
Calcium	ppm	ASTM D5185m 200	66	62
Phosphorus	ppm	ASTM D5185m 300	358	351
Zinc	ppm	ASTM D5185m 370	483	441
Sulfur	ppm	ASTM D5185m 2500	1377	1378

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	0	<1
Sodium	ppm	ASTM D5185m	0	1
Potassium	ppm	ASTM D5185m >20	1	0

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 20050	2319
Particles >6µm	ASTM D7647	>1300	▲ 3578	392
Particles >14µm	ASTM D7647	>160	123	52
Particles >21µm	ASTM D7647	>40	29	10
Particles >38µm	ASTM D7647	>10	1	1
Particles >71µm	ASTM D7647	>3	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/19/14	18/16/13

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.36	0.38




OIL ANALYSIS REPORT

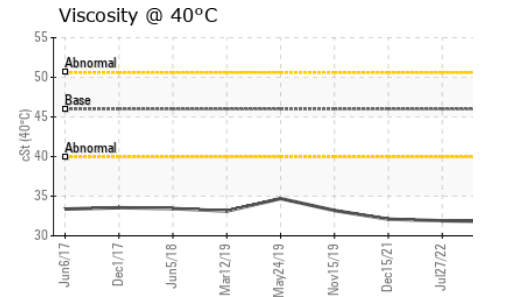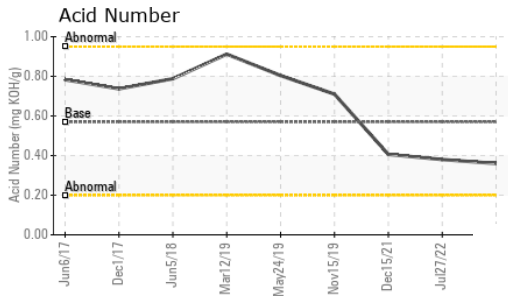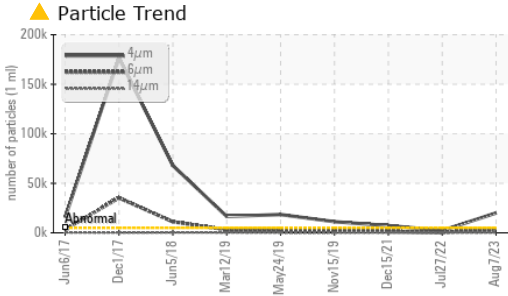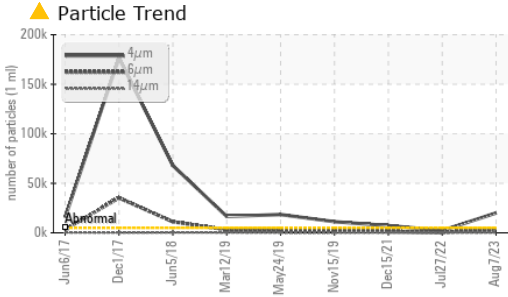





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	31.8	31.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

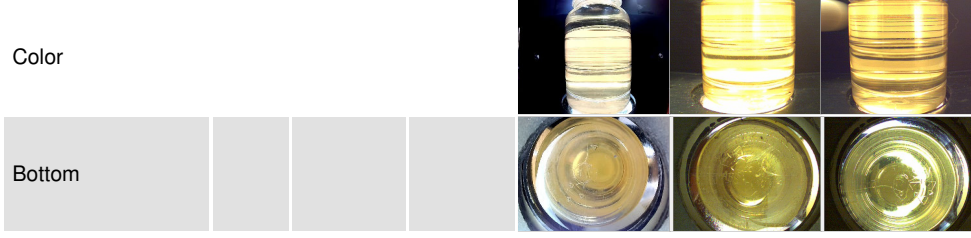

GRAPHS

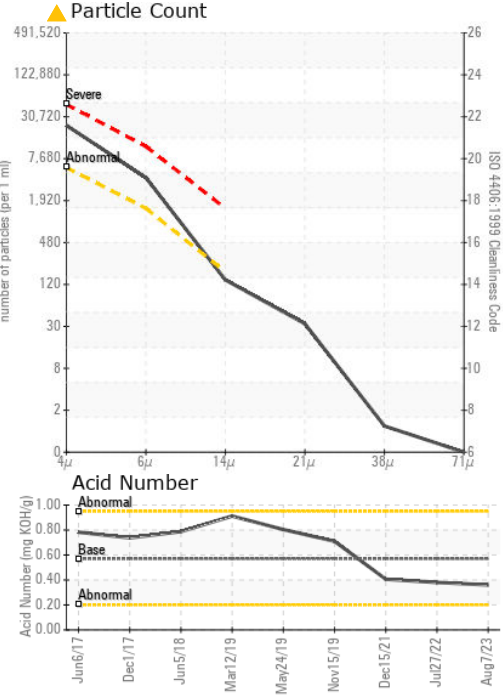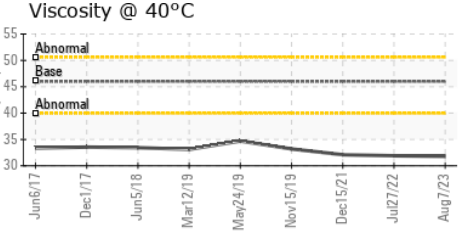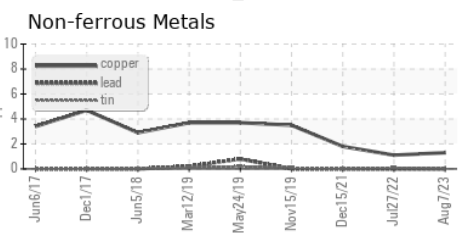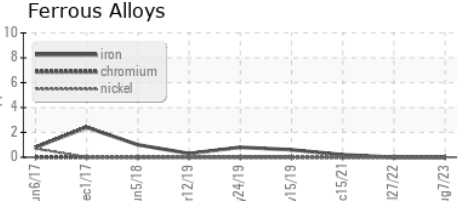

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0764845 **Received** : 24 Aug 2023
Lab Number : 05933479 **Diagnosed** : 28 Aug 2023
Unique Number : 10618750 **Diagnostician** : Jonathan Hester
Test Package : IND 2

SIEMENS
 4620 FOREST AVE
 CINCINNATI, OH
 US 45212
 Contact: STEVE KROEGER
 steve.kroeger@siemens.com
 T: (513)841-3409
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)