



PROBLEM SUMMARY

Sample Rating Trend



ISO




Machine Id
550-01 WC-32 (S/N T60A0300008)

Component
Hydraulic System

Fluid
CHEVRON RANDO HD 46 (130 GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

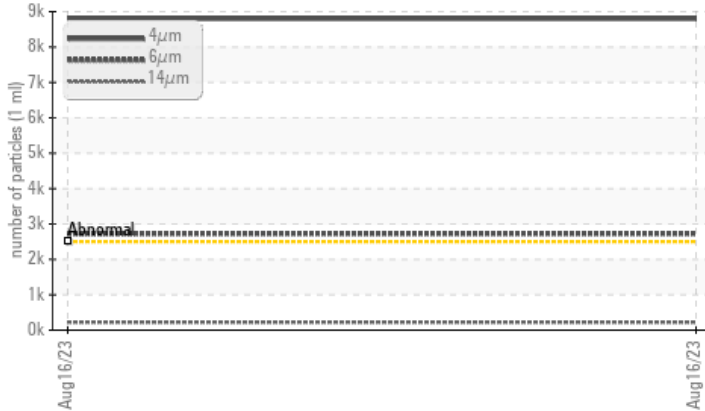


RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ISO 4406 (c)	ABNORMAL	---	---
Particles >4µm	>2500		▲ 8799	---	---
Particles >6µm	>640		▲ 2725	---	---
Particles >14µm	>160		▲ 222	---	---
Particles >21µm	>40		▲ 49	---	---
Oil Cleanliness	>18/16/14		▲ 20/19/15	---	---

PrtFilter



Customer Id: SMCSAN
Sample No.: PH0001961
Lab Number: 05933492
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

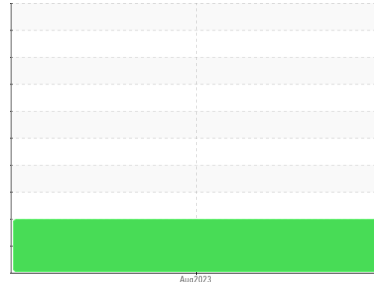

ISO



Machine Id
550-01 WC-32 (S/N T60A0300008)

Component
Hydraulic System

Fluid
CHEVRON RANDO HD 46 (130 GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PH0001961	---	---
Sample Date	Client Info			16 Aug 2023	---	---
Machine Age	hrs	Client Info		1649	---	---
Oil Age	hrs	Client Info		1649	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>20	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	1	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		48	---	---
Phosphorus	ppm	ASTM D5185m		365	---	---
Zinc	ppm	ASTM D5185m		475	---	---
Sulfur	ppm	ASTM D5185m		1732	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	▲ 8799	---	---
Particles >6µm		ASTM D7647	>640	▲ 2725	---	---
Particles >14µm		ASTM D7647	>160	▲ 222	---	---
Particles >21µm		ASTM D7647	>40	▲ 49	---	---
Particles >38µm		ASTM D7647	>10	2	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/14	▲ 20/19/15	---	---





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.44	---	---

Particle Filter (Magn: 200 x)

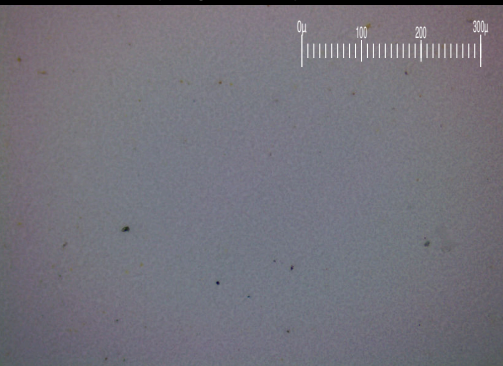



OIL ANALYSIS REPORT

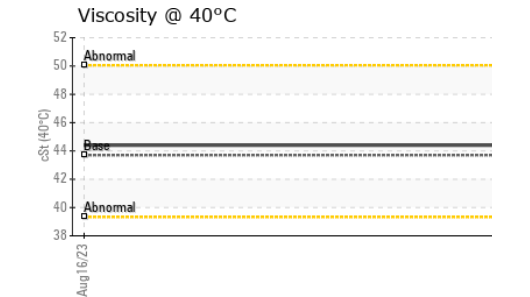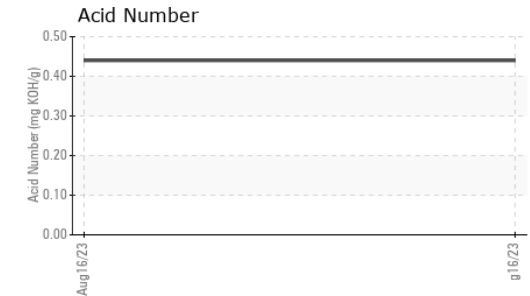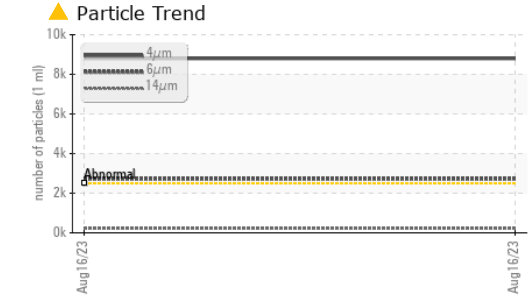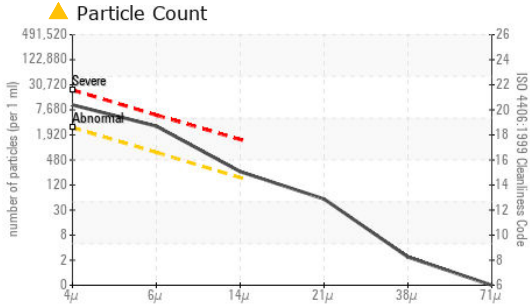

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0001961 **Received** : 24 Aug 2023
Lab Number : 05933492 **Diagnosed** : 28 Aug 2023
Unique Number : 10618763 **Diagnostician** : Jonathan Hester
Test Package : PLANT (Additional Tests: PrtFilter)

SMC LTD
 3250 BRICKWAY BLVD
 SANTA ROSA, CA
 US 95403
 Contact: SUSAN BENNETT
 susan.bennett@smcltd.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.7	44.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

