


PROBLEM SUMMARY


Sample Rating Trend

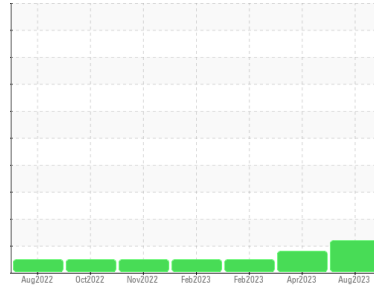

Area
Thermoforming
Machine Id
Line 3 D Extruder (S/N X-8264)
Component
Bevel Helical Gearbox
Fluid
NOT GIVEN (8 GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

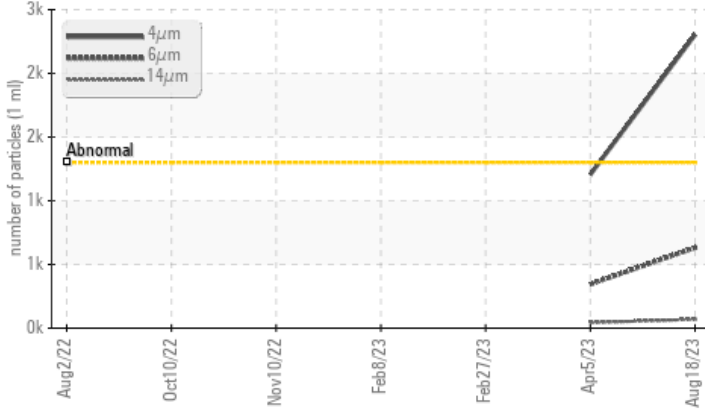

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor. (Customer Sample Comment: BC)

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	ATTENTION	NORMAL
Particles >4µm	ASTM D7647	>1300	▲ 2303	1206	---
Particles >6µm	ASTM D7647	>320	▲ 632	▲ 345	---
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 18/16/13	▲ 17/16/13	---

Customer Id: DARDALTX
Sample No.: TO50001738
Lab Number: 05933510
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

05 Apr 2023 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



27 Feb 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



08 Feb 2023 Diag: Sean Felton

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



Area
Thermoforming
 Machine Id
Line 3 D Extruder (S/N X-8264)
 Component
Bevel Helical Gearbox
 Fluid
NOT GIVEN (8 GAL)

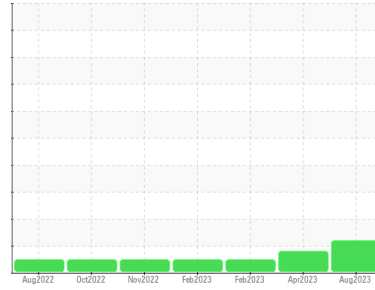

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: BC)

Wear
 All component wear rates are normal.

Contamination
 There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		TO50001738	TO50001633	TO50001350
Sample Date	Client Info		18 Aug 2023	05 Apr 2023	27 Feb 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ATTENTION	ATTENTION	NORMAL

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		11	12	7
Iron	ppm	ASTM D5185m >150	2	2	1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	0	0	0
Lead	ppm	ASTM D5185m >100	0	0	0
Copper	ppm	ASTM D5185m >50	2	1	<1
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	2	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m	0	<1	6
Calcium	ppm	ASTM D5185m	0	<1	0
Phosphorus	ppm	ASTM D5185m	859	555	562
Zinc	ppm	ASTM D5185m	7	4	5
Sulfur	ppm	ASTM D5185m	595	512	423

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	17	11	8
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m >20	1	<1	0
Water	%	ASTM D6304 >0.1	0.004	0.006	---
ppm Water	ppm	ASTM D6304 >1000	49.8	69.2	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	▲ 2303	1206	---
Particles >6µm	ASTM D7647	>320	▲ 632	▲ 345	---
Particles >14µm	ASTM D7647	>80	69	43	---
Particles >21µm	ASTM D7647	>20	24	16	---
Particles >38µm	ASTM D7647	>4	2	1	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 18/16/13	▲ 17/16/13	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.67	0.67	---


OIL ANALYSIS REPORT

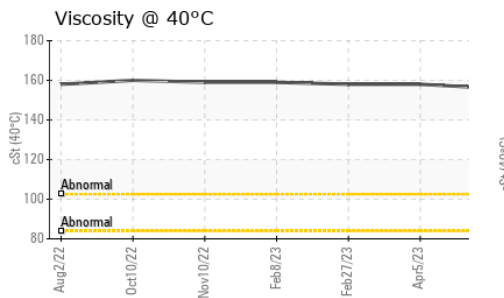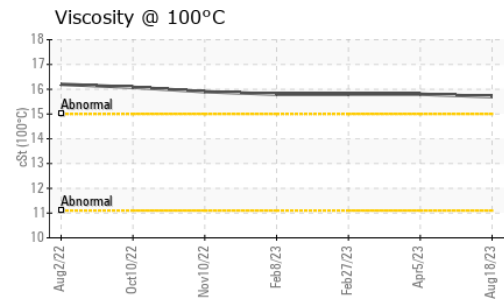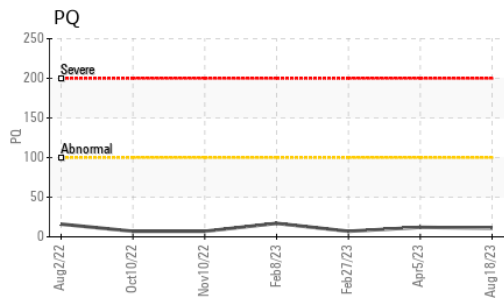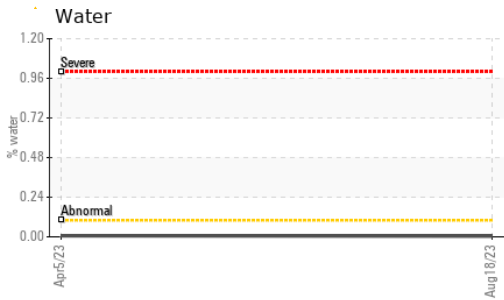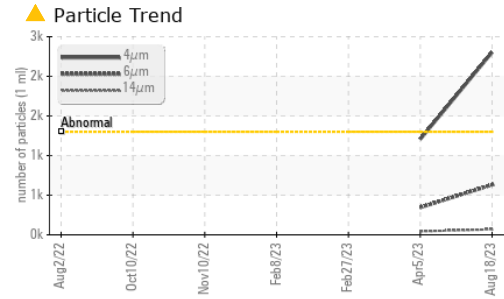





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	156	158	158
Visc @ 100°C	cSt	ASTM D445	15.7	15.8	15.8
Viscosity Index (VI)	Scale	ASTM D2270	103	102	102

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

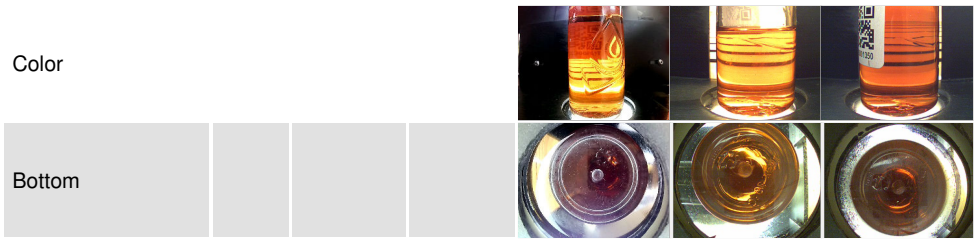

GRAPHS

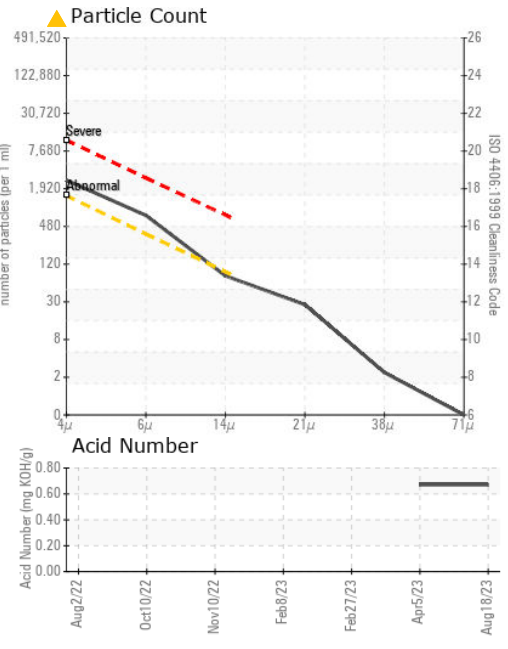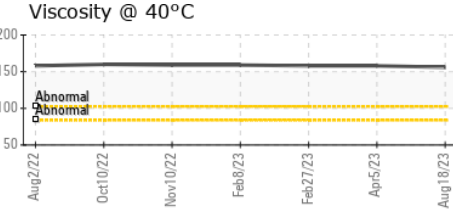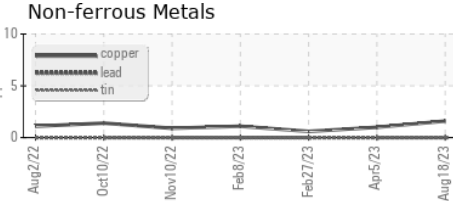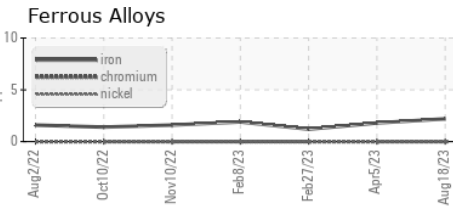

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001738 **Received** : 24 Aug 2023
Lab Number : 05933510 **Diagnosed** : 28 Aug 2023
Unique Number : 10618781 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F: