



# PROBLEM SUMMARY

Area  
**IRON STAR [200006142]**  
 Machine Id  
**47WEA88322**  
 Component  
**Wind Turbine Gearbox**  
 Fluid  
**GEAR OIL (PAO) ISO 320 (--- LTR)**

Sample Rating Trend




ISO



## COMPONENT CONDITION SUMMARY

▲ Particle Trend

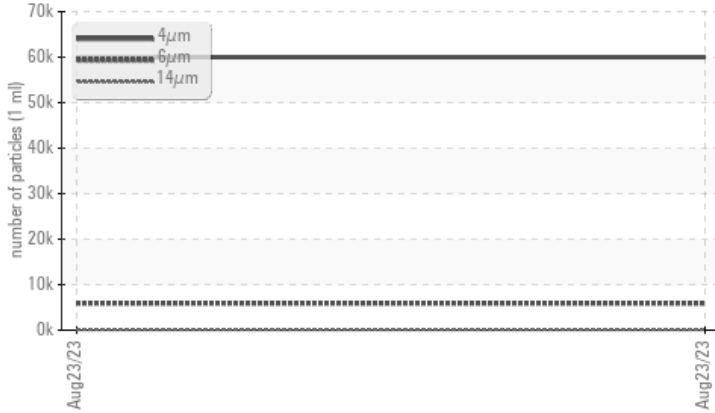

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Particles >6µm	ASTM D7647	>320	▲ <b>5904</b>	---	---	---
Particles >14µm	ASTM D7647	>40	▲ <b>117</b>	---	---	---
Particles >21µm	ASTM D7647	>10	▲ <b>24</b>	---	---	---
Oil Cleanliness	ISO 4406 (c)	>--/15/12	▲ <b>23/20/14</b>	---	---	---

Customer Id: NORDEX  
 Sample No.: NX05933550  
 Lab Number: 05933550  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area  
**IRON STAR [200006142]**  
 Machine Id  
**47WEA88322**  
 Component  
**Wind Turbine Gearbox**  
 Fluid  
**GEAR OIL (PAO) ISO 320 (--- LTR)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>NX05933550</b>	---	---
Sample Date	Client Info	<b>23 Aug 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184 >50	<b>12</b>	---	---
Iron	ppm ASTM D5185m >30	<b>18</b>	---	---
Chromium	ppm ASTM D5185m >3	<b>0</b>	---	---
Nickel	ppm ASTM D5185m >3	<b>0</b>	---	---
Titanium	ppm ASTM D5185m >10	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >30	<b>0</b>	---	---
Lead	ppm ASTM D5185m >15	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Tin	ppm ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 25	<b>6</b>	---	---
Barium	ppm ASTM D5185m 12	<b>2</b>	---	---
Molybdenum	ppm ASTM D5185m 5	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m 25	<b>0</b>	---	---
Calcium	ppm ASTM D5185m 25	<b>19</b>	---	---
Phosphorus	ppm ASTM D5185m 375	<b>198</b>	---	---
Zinc	ppm ASTM D5185m 25	<b>4</b>	---	---
Sulfur	ppm ASTM D5185m 4900	<b>5464</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+15	<b>14</b>	---	---
Sodium	ppm ASTM D5185m	<b>0</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>1</b>	---	---
Water	% ASTM D6304 >0.02	<b>0.003</b>	---	---
ppm Water	ppm ASTM D6304 >200	<b>27.5</b>	---	---

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>59999</b>	---	---
Particles >6µm	ASTM D7647 >320	▲ <b>5904</b>	---	---
Particles >14µm	ASTM D7647 >40	▲ <b>117</b>	---	---
Particles >21µm	ASTM D7647 >10	▲ <b>24</b>	---	---
Particles >38µm	ASTM D7647 >3	<b>1</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >--/15/12	▲ <b>23/20/14</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 1.10	<b>0.35</b>	---	---



# OIL ANALYSIS REPORT

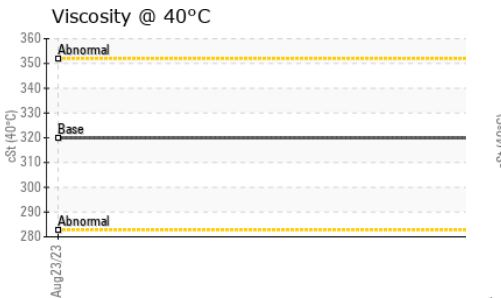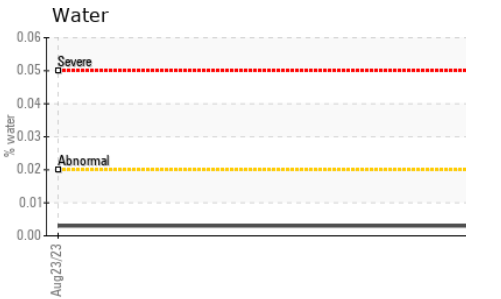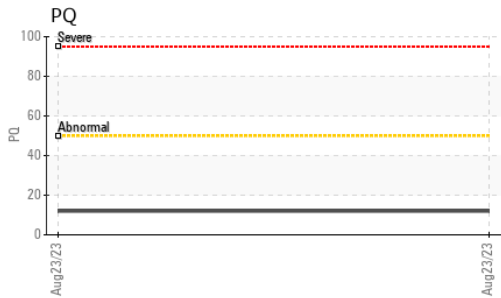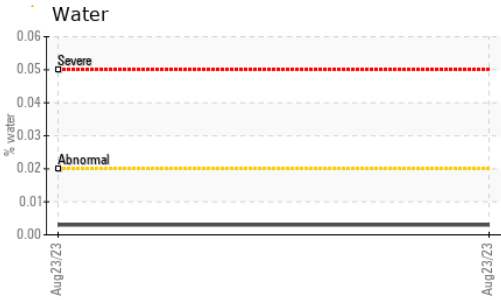






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.02	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

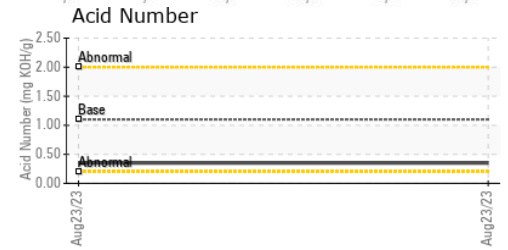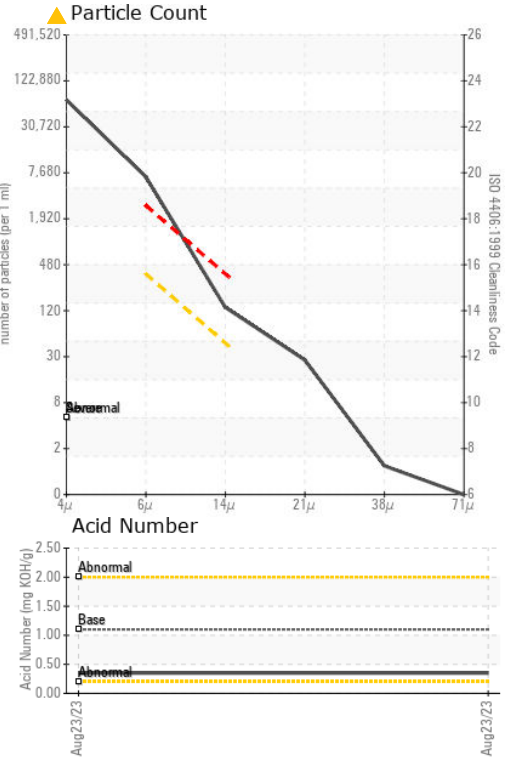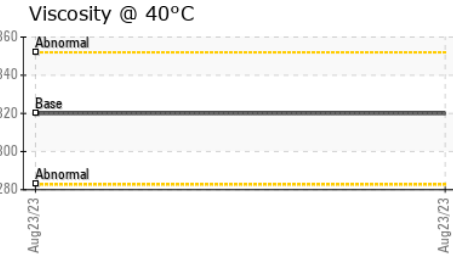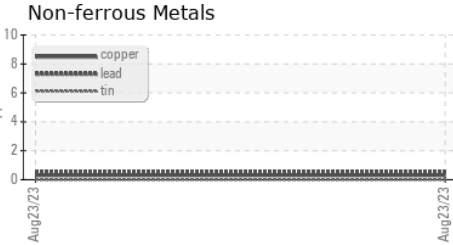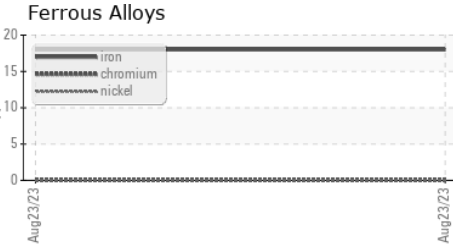

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : NX05933550 Received : 24 Aug 2023  
 Lab Number : 05933550 Diagnosed : 25 Aug 2023  
 Unique Number : 10618821 Diagnostician : Don Baldrige  
 Test Package : IND 2 ( Additional Tests: KF, PQ, PrtCount )

**NORDEX USA - Chicago**  
 300 SOUTH WACKER DRIVE, SUITE 1500  
 CHICAGO, IL  
 US 60606  
 Contact: DEVIN LINEHAN  
 DLinehan@nordex-online.com  
 T: (312)386-4124  
 F: (312)386-7102

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)