

OIL ANALYSIS REPORT

3) Madozi Auglozi Auglozi Auglozi Auglozi

Sample Rating Trend



NORMAL

KAESER SK 15 7186278 (S/N 1463) Component Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORMATION method limit/base	current	history1	history2
Sample Number Client Info K	C111686	KC105806	KC85936
Sample Date Client Info 1	8 Apr 2023	01 Dec 2022	31 Aug 2022
Machine Age hrs Client Info 1	8604	16558	14969
Oil Age hrs Client Info 2	700	1589	6079
Oil Changed Client Info N	lot Changd	Not Changd	Changed
Sample Status N	IORMAL	ABNORMAL	ABNORMAL
WEAR METALS method limit/base	current	history1	history2
Iron ppm ASTM D5185m >50	0	<1	<1
Chromium ppm ASTM D5185m >10	0	0	0
Nickel ppm ASTM D5185m >3	0	0	0
Titanium ppm ASTM D5185m >3	0	0	0
Silver ppm ASTM D5185m >2	0	0	0
Aluminum ppm ASTM D5185m >10	0	<1	0
Lead ppm ASTM D5185m >10	0	0	0
Copper ppm ASTM D5185m >50	41	12	5 3
Tin ppm ASTM D5185m >10	0	0	0
Antimony ppm ASTM D5185m			
Vanadium ppm ASTM D5185m	0	0	0
Cadmium ppm ASTM D5185m	0	0	0
ADDITIVES method limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	0	0
Barium ppm ASTM D5185m 90	2	4	0
Molybdenum ppm ASTM D5185m	0	0	0
Manganese ppm ASTM D5185m	0	0	0
Magnesium ppm ASTM D5185m 90	12	52	6
Calcium ppm ASTM D5185m 2	0	0	0
Phosphorus ppm ASTM D5185m	0	11	3
Zinc ppm ASTM D5185m	53	34	54
CONTAMINANTS method limit/base	current	history1	history2
Silicon ppm ASTM D5185m >25	0	<1	0
Sodium ppm ASTM D5185m	10	30	4
Potassium ppm ASTM D5185m >20	2	4	<1
Water % ASTM D6304 >0.05	0.005	0.018	0.009
ppm Water ppm ASTM D6304 >500	57.0	182.1	92.1
FLUID CLEANLINESS method limit/base	current	history1	history2
Particles >4µm ASTM D7647	298	18009	3025
Particles >6µm ASTM D7647 >1300	96	<u> </u>	728
Particles >14µm ASTM D7647 >80	22	A 369	18
	9	<u> </u>	4
Particles >21µm ASTM D7647 >20		4	0
Particles >21μm ASTM D/64/ >20 Particles >38μm ASTM D/64/ >4	0	4	0
	0	0	0
Particles >38μmASTM D7647>4			
Particles >38μm ASTM D7647 >4 Particles >71μm ASTM D7647 >3	0	0	0



OIL ANALYSIS REPORT

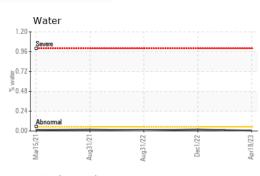

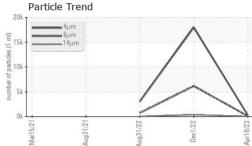


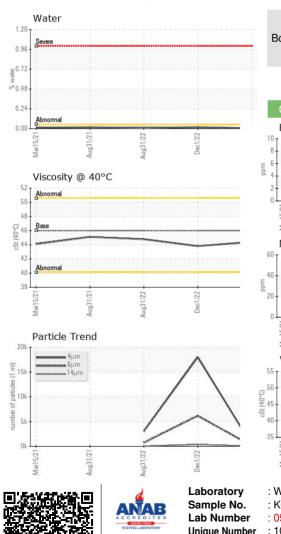

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.4	43.8	44.78
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				. 6.		



Bottom

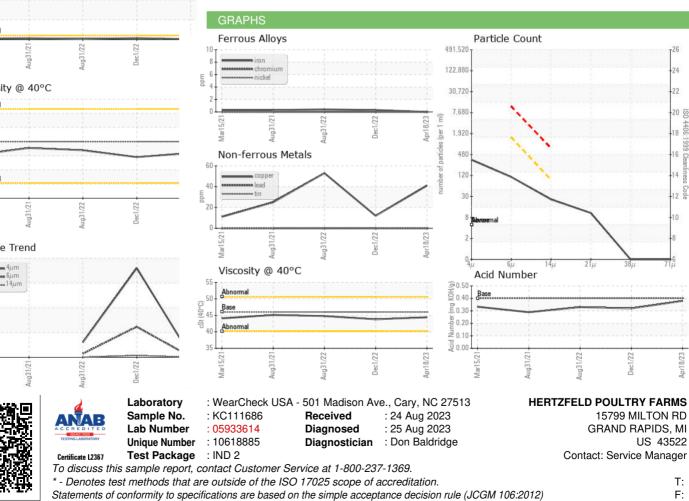

Contact/Location: Service Manager - HERGRAKC