


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id KAESER SM 7.5 6053728 (S/N 1363)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Sep 201	3 Oct2019	Aug ² 022 Ma	y/2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA002809	KCP49731	KC75981
Sample Date		Client Info		24 May 2023	03 Aug 2022	30 Oct 2019
Machine Age	hrs	Client Info		7238	6543	3597
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	2	2	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	27
Barium	ppm	ASTM D5185m	90	6	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	67	37	41
Calcium	ppm	ASTM D5185m	0	3	0	<1
Phosphorus	ppm	ASTM D5185m	0	1	<1	4
Zinc	ppm	ASTM D5185m	0	3	3	0
Sulfur	ppm	ASTM D5185m	23500	21851	17691	15404
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	2
Sodium	ppm	ASTM D5185m		19	12	14
Potassium	ppm	ASTM D5185m	>20	1	0	1
Water	%	ASTM D6304	>0.05	0.016	0.018	0.011
ppm Water	ppm	ASTM D6304	>500	167.5	181.4	117.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1251	9960	4516
Particles >6µm		ASTM D7647	>1300	421	<u>4084</u>	<u>▲</u> 1841
Particles >14μm		ASTM D7647	>80	46	<u>^</u> 209	<u>▲</u> 137
Particles >21μm		ASTM D7647	>20	16	<u></u> 38	<u>▲</u> 54
Particles >38μm		ASTM D7647	>4	0	3	4
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/16/13	2 0/19/15	▲ 18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.30

0.318



OIL ANALYSIS REPORT

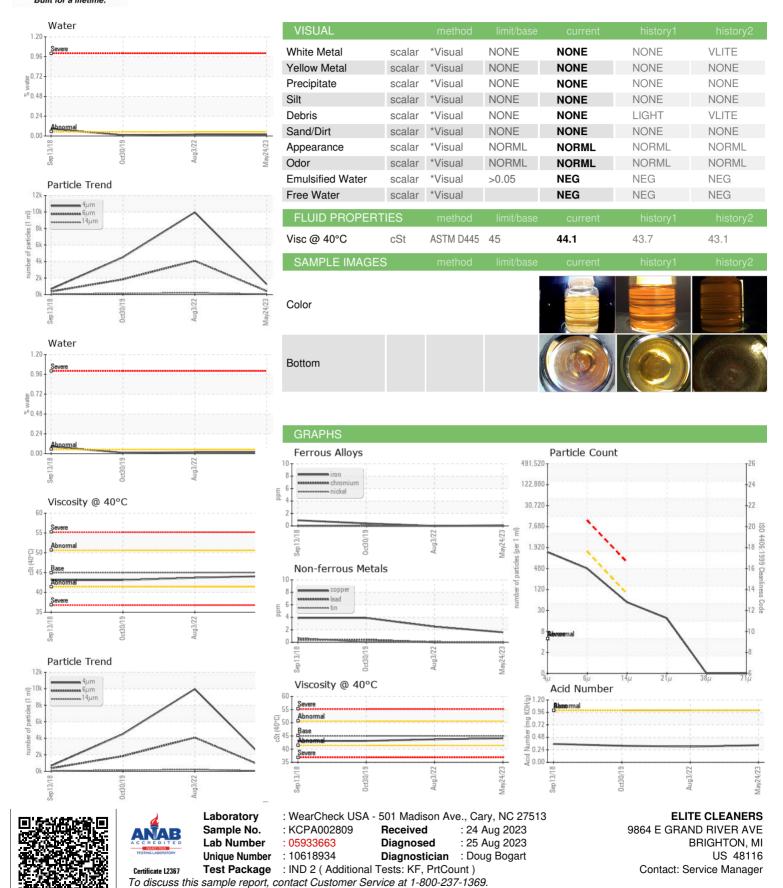

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: