




PROBLEM SUMMARY

Sample Rating Trend

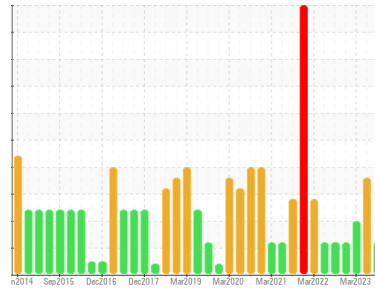

ISO




Machine Id
WOLFING SMIMID GRINDER 1 (S/N CK3357U00145)

Component
Gearbox

Fluid
PETRO CANADA PURITY FG EP GEAR OIL 220 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

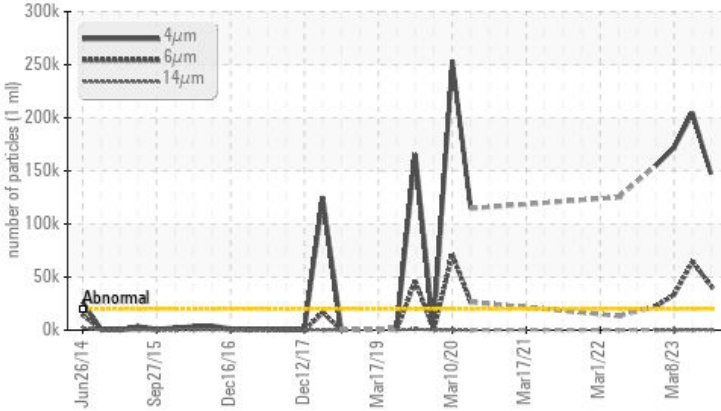

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>20000	▲ 147252	▲ 204587	▲ 171705
Particles >6µm	ASTM D7647	>5000	▲ 41724	▲ 64539	▲ 33204
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/23/14	▲ 25/23/15	▲ 25/22/14

Customer Id: SMIMID
Sample No.: USP0000518
Lab Number: 05933719
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

04 Jun 2023 Diag: Doug Bogart

WATER



We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor. Gear wear is indicated. There is a high amount of silt (particulates < 14 microns in size) present in the oil. Free water present. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



08 Mar 2023 Diag: Doug Bogart

CONTAMINANT



Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



29 Nov 2022 Diag: Doug Bogart

ISO



Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

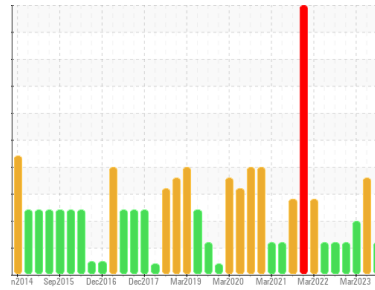

ISO



Machine Id
WOLFKING SMIMID GRINDER 1 (S/N CK3357U00145)

Component

Gearbox

Fluid

PETRO CANADA PURITY FG EP GEAR OIL 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		USP0000518	USP243482	USP246387
Sample Date	Client Info		23 Aug 2023	04 Jun 2023	08 Mar 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	153	▲ 193	108
Chromium	ppm	ASTM D5185m	>15	1	2	1
Nickel	ppm	ASTM D5185m	>15	<1	1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	1	<1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	1	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		2	5	<1
Phosphorus	ppm	ASTM D5185m		127	68	73
Zinc	ppm	ASTM D5185m		0	0	3
Sulfur	ppm	ASTM D5185m		900	839	702

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	4	4	4
Sodium	ppm	ASTM D5185m		<1	2	2
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.2	0.001	0.075	0.060
ppm Water	ppm	ASTM D6304	>2000	11.7	750	602.5


FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 147252	▲ 204587	▲ 171705
Particles >6µm	ASTM D7647	>5000	▲ 41724	▲ 64539	▲ 33204
Particles >14µm	ASTM D7647	>640	121	267	92
Particles >21µm	ASTM D7647	>160	20	34	14
Particles >38µm	ASTM D7647	>40	1	2	1
Particles >71µm	ASTM D7647	>10	0	1	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/23/14	▲ 25/23/15	▲ 25/22/14


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.51	0.35	0.18	0.24


▲ Particle Trend

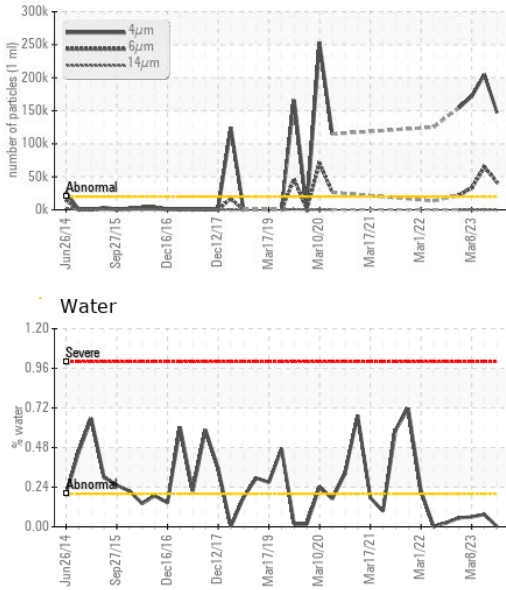


Water

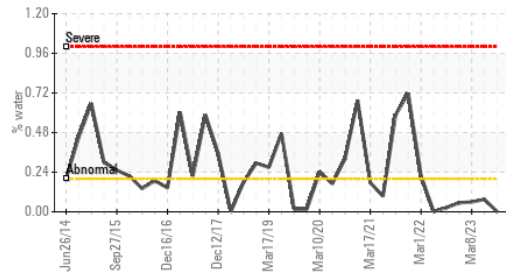


Acid Number

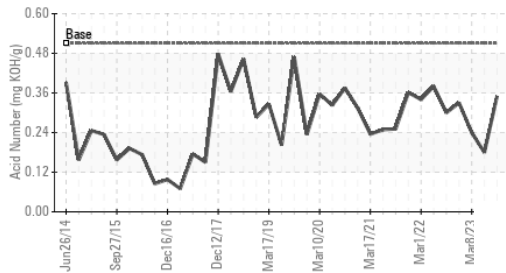

Water

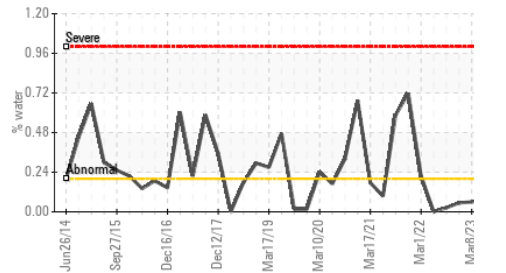


Viscosity @ 40°C

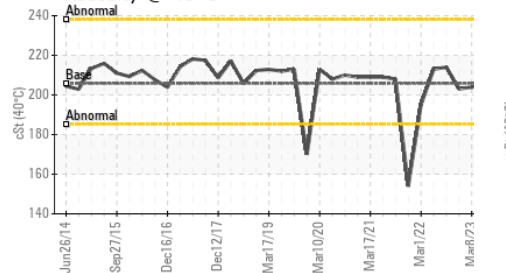






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	HAZY	▲ HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	0.2%
Free Water	scalar	*Visual		NEG	▲ 1.0

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	205.8	202	205

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

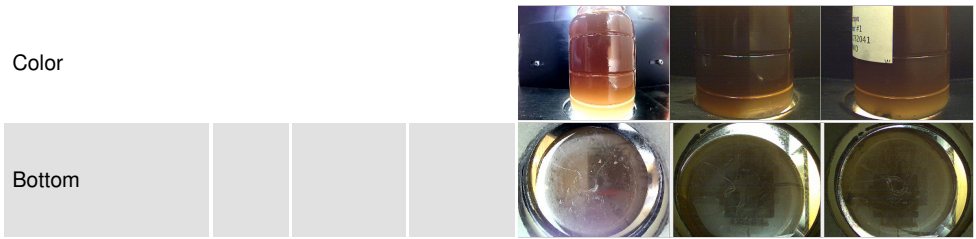

GRAPHS

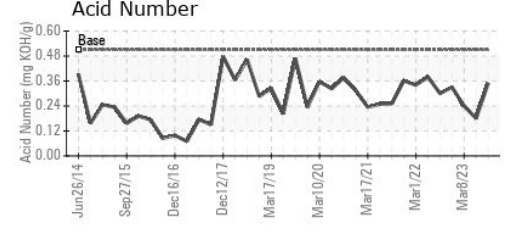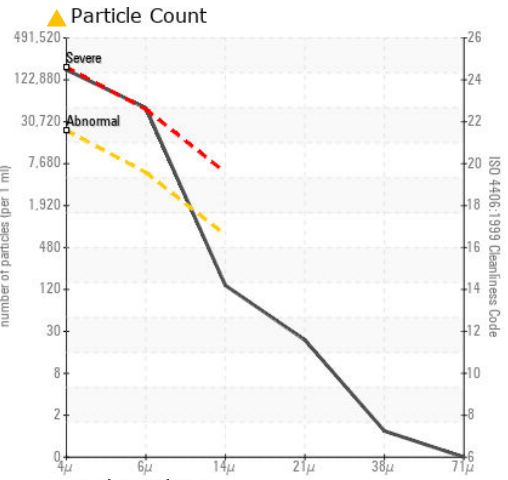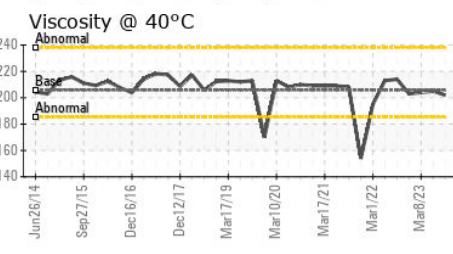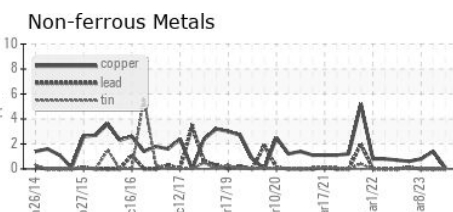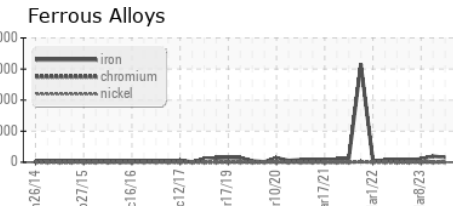

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP0000518
Lab Number : 05933719
Unique Number : 10618990
Test Package : IND 2

SMITHFIELD FOODS-MIDDLESBORO
 MIDDLESBORO, KY
 US
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: