



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
VOLVO FSP 133740 (S/N 4V4MC9EG8FN923863)

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (42 QTS)

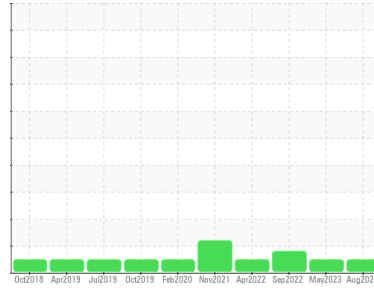

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0787780	WC0787579	WC0717450
Sample Date	Client Info			15 Aug 2023	11 May 2023	14 Sep 2022
Machine Age	mls	Client Info		417191	0	399679
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	6	5	16
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	1	2	▲ 25
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>25	6	2	8
Lead	ppm	ASTM D5185m	>40	<1	1	3
Copper	ppm	ASTM D5185m	>330	2	2	6
Tin	ppm	ASTM D5185m	>15	2	2	4
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	4	1	42
Barium	ppm	ASTM D5185m	10	0	2	0
Molybdenum	ppm	ASTM D5185m	100	72	61	70
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m	450	961	877	320
Calcium	ppm	ASTM D5185m	3000	1280	1057	1890
Phosphorus	ppm	ASTM D5185m	1150	1138	1003	996
Zinc	ppm	ASTM D5185m	1350	1344	1182	1200
Sulfur	ppm	ASTM D5185m	4250	4239	3253	3831



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	3	14
Sodium	ppm	ASTM D5185m	>158	2	2	1
Potassium	ppm	ASTM D5185m	>20	<1	2	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	7.7	7.2	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	19.7	22.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	14.9	17.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.0	9.7	8.4







OIL ANALYSIS REPORT

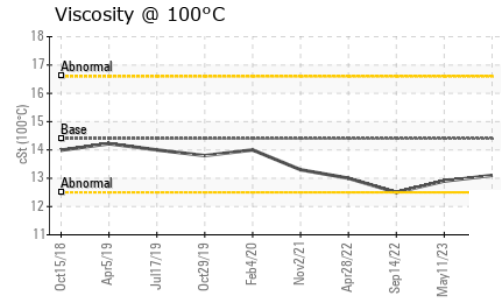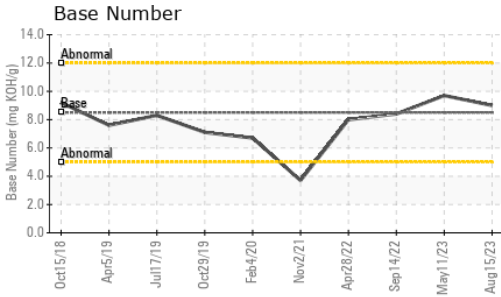

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	12.9	12.5

GRAPHS

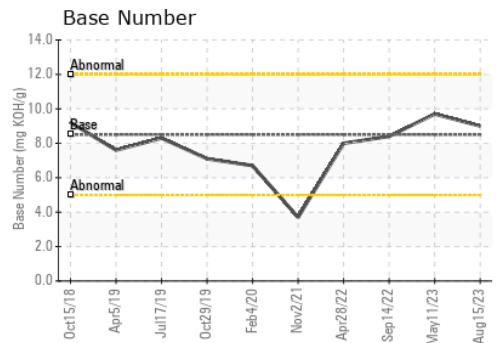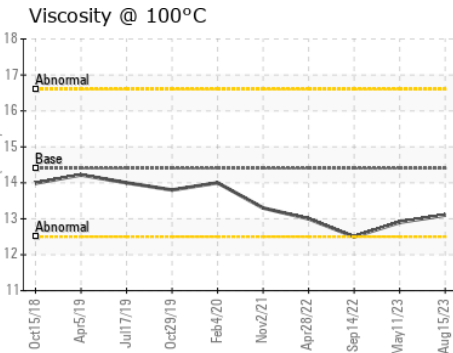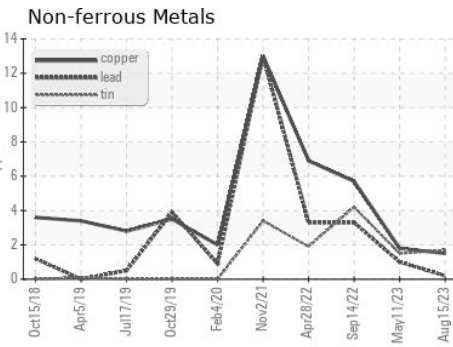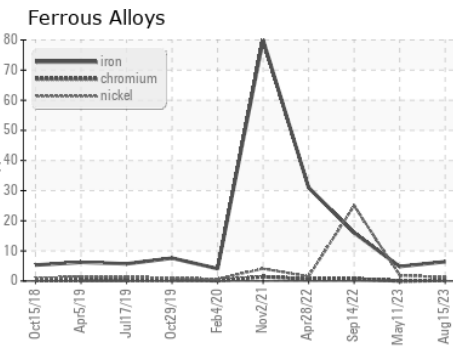

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0787780
Lab Number : 05934151
Unique Number : 10619422
Test Package : FLEET

Received : 24 Aug 2023
Diagnosed : 25 Aug 2023
Diagnostician : Wes Davis

FRESHPOINT
 8801 EXCHANGE DRIVE
 ORLANDO, FL
 US 32809
 Contact: CRAIG EVANS
 evans_craig@sbcglobal.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: