




OIL ANALYSIS REPORT

Sample Rating Trend

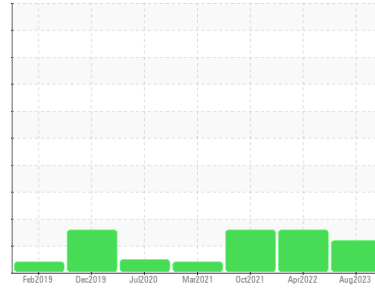

ISO



Area
METRO
 Machine Id
METRO 20012
 Component
Rear Differential
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 5W40 Gear Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843180	WC0692943	WC0631720
Sample Date	Client Info		09 Aug 2023	14 Apr 2022	18 Oct 2021
Machine Age	mls	Client Info	410262	329913	277084
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	MARGINAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	99	405	348
Chromium	ppm	ASTM D5185m >10	<1	2	2
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m	<1	<1	0
Aluminum	ppm	ASTM D5185m >25	0	4	3
Lead	ppm	ASTM D5185m >25	0	<1	0
Copper	ppm	ASTM D5185m >100	<1	3	2
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m >5	---	---	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	311	391	386
Barium	ppm	ASTM D5185m	0	0	6
Molybdenum	ppm	ASTM D5185m	1	<1	0
Manganese	ppm	ASTM D5185m	2	6	5
Magnesium	ppm	ASTM D5185m	2	3	1
Calcium	ppm	ASTM D5185m	3	14	14
Phosphorus	ppm	ASTM D5185m	1422	2122	2212
Zinc	ppm	ASTM D5185m	3	6	9
Sulfur	ppm	ASTM D5185m	25648	21917	35749

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	16	▲ 86	▲ 89
Sodium	ppm	ASTM D5185m	<1	7	10
Potassium	ppm	ASTM D5185m >20	1	6	8
Water	%	ASTM D6304 >.2	0.036	0.039	0.086
ppm Water	ppm	ASTM D6304 >2000	363.9	395.9	864.1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 135356	---	---
Particles >6µm	ASTM D7647	>5000	▲ 23174	---	---
Particles >14µm	ASTM D7647	>640	54	---	---
Particles >21µm	ASTM D7647	>160	9	---	---
Particles >38µm	ASTM D7647	>40	1	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/13	---	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.53	3.24	3.741




OIL ANALYSIS REPORT


Particle Trend

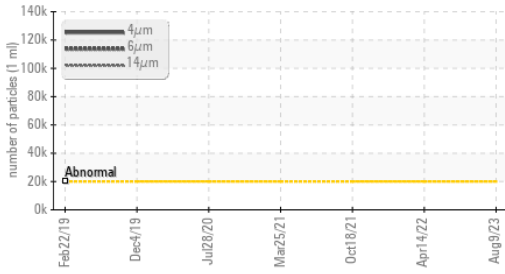


Water

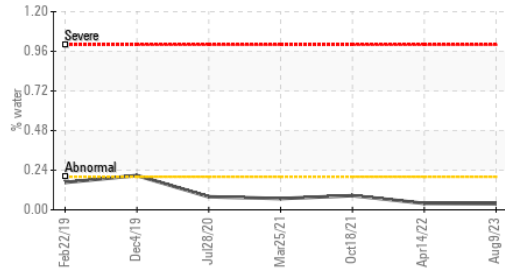


Viscosity @ 100°C

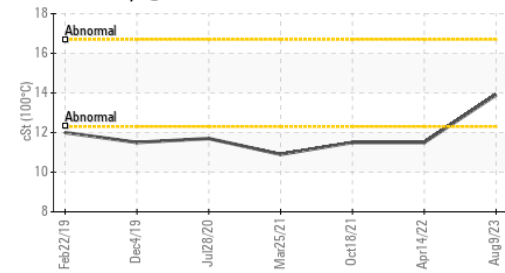

Water

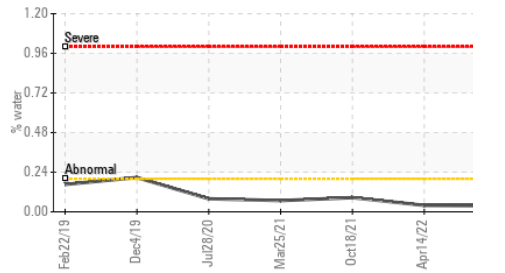


Viscosity @ 100°C

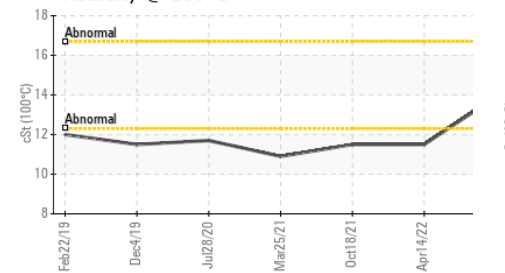

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	93.2	69.1	69.7
Visc @ 100°C	cSt	ASTM D445	13.9	11.5	11.5
Viscosity Index (VI)	Scale	ASTM D2270	152	161	159

SAMPLE IMAGES

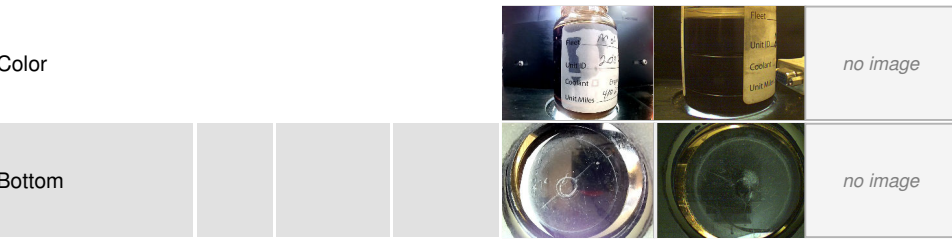


GRAPHS


Ferrous Alloys

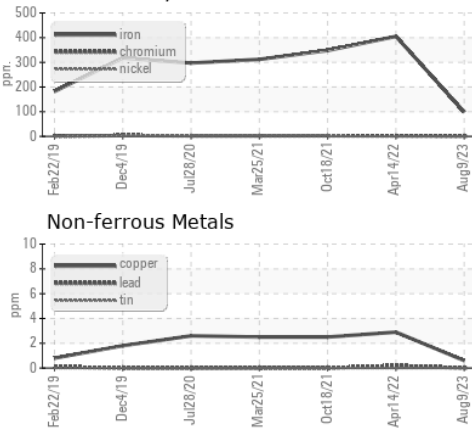


Non-ferrous Metals

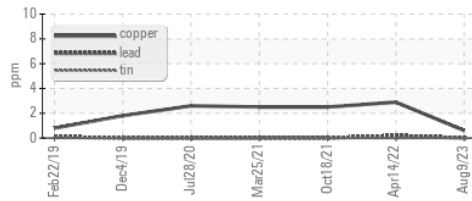


Viscosity @ 40°C

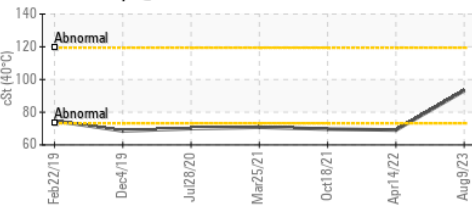

Particle Count

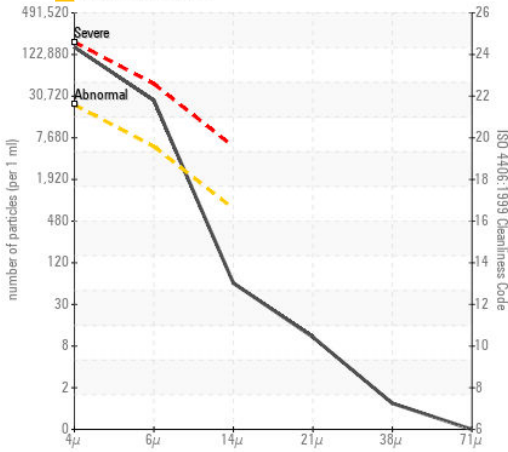

Acid Number

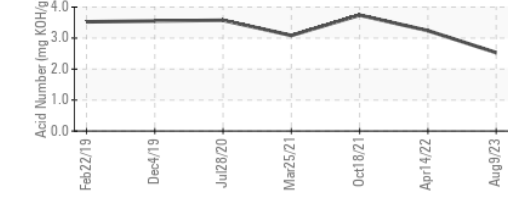

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843180 **Received** : 24 Aug 2023
Lab Number : 05934318 **Diagnosed** : 28 Aug 2023
Unique Number : 10619589 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)