

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

Compressor KAESER SIGMA (OEM) S-460 (--- GAL)

Component

Recommendation

Resample at the next service interval to monitor.

KAESER CSD 75 4704466 (S/N 1191)

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004167	KCP52927	KCP51461
Sample Date		Client Info		14 Aug 2023	13 Jan 2023	13 May 2022
Machine Age	hrs	Client Info		11818	8376	4799
Oil Age	hrs	Client Info		0	1172	3776
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m		0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m		0	2	<1
Lead		ASTM D5185m	>10	0	0	0
	ppm	ASTM D5185m		2	<1	<1
Copper Tin	ppm	ASTM D5185m	>50 >10	2	<1	< 1
	ppm	ASTM D5185m	>10	0 	<1	
Antimony	ppm					
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	29	61	63
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	65	83	84
Calcium	ppm	ASTM D5185m	2	1	2	2
Phosphorus	ppm	ASTM D5185m		2	2	12
Zinc	ppm	ASTM D5185m		3	0	0
Sulfur	ppm	ASTM D5185m		19895	21058	16591
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		26	25	40
Potassium	ppm	ASTM D5185m	>20	5	4	4
Water	%	ASTM D6304	>0.05	0.015	0.021	0.029
ppm Water	ppm	ASTM D6304	>500	151.2	218.4	296.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1071	2853	15224
Particles >6µm		ASTM D7647	>1300	250	367	4 143
Particles >14µm		ASTM D7647	>80	24	14	2 08
Particles >21µm		ASTM D7647	>20	8	5	A 37
Particles >38µm		ASTM D7647	>4	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/12	19/16/11	▲ 21/19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.32	0.34


Report Id: AMAFOR [WUSCAR] 05934345 (Generated: 08/28/2023 16:26:00) Rev: 1


Contact/Location: Service Manager - AMAFOR



OIL ANALYSIS REPORT

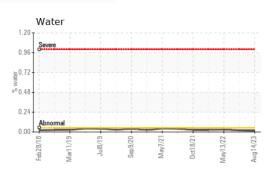

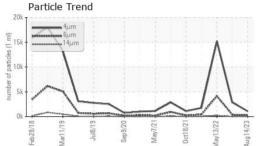


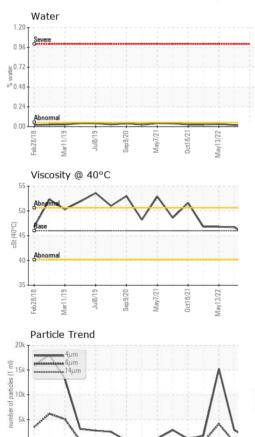

0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.9	46.7	46.8
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color						

Bottom

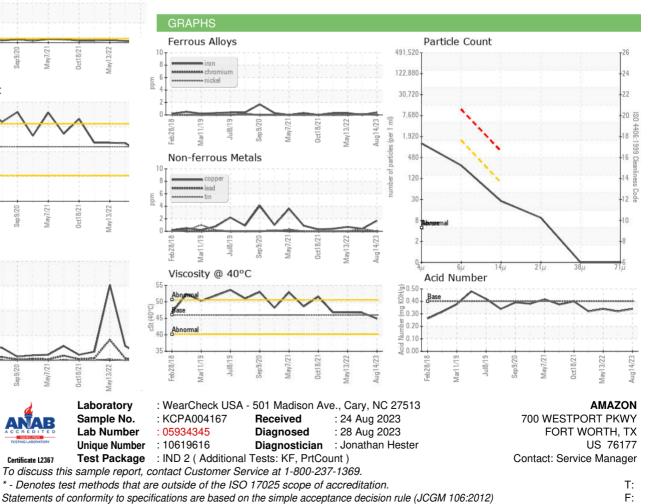

Contact/Location: Service Manager - AMAFOR