




PROBLEM SUMMARY

Sample Rating Trend

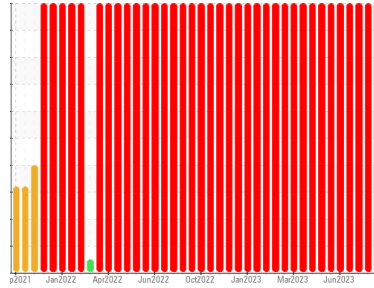


WEAR



Area
Building 12
 Machine Id
Cone 1
 Component
Bulk Tank Lube System
 Fluid
Mobilgear 629 (105 GAL)

COMPONENT CONDITION SUMMARY

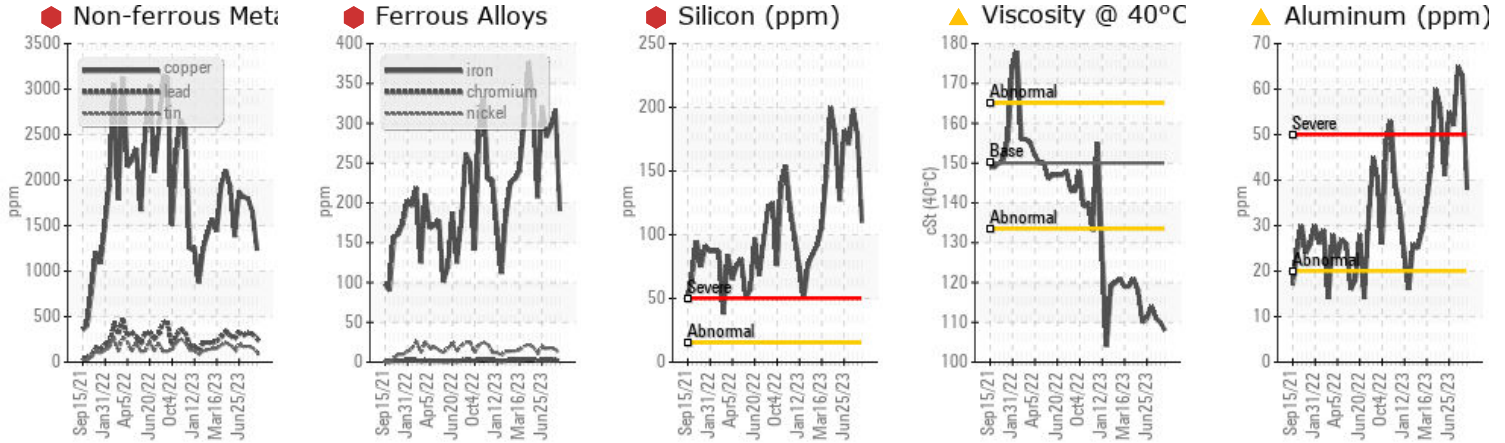

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Iron	ppm	ASTM D5185m	>20	191	317	296
Aluminum	ppm	ASTM D5185m	>20	38	63	65
Lead	ppm	ASTM D5185m	>20	258	309	321
Copper	ppm	ASTM D5185m	>20	1232	1651	1797
Tin	ppm	ASTM D5185m	>20	107	161	174
Silicon	ppm	ASTM D5185m	>15	110	178	198
Visc @ 40°C	cSt	ASTM D445	150	108	110	111

Customer Id: THRPIT
 Sample No.: WC0820049
 Lab Number: 05934418
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Inspect Wear Source	---	---	?	We advise that you inspect for the source(s) of wear.
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check all areas where dirt can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

02 Aug 2023 Diag: Don Baldrige

WEAR



We advise that you check all areas where dirt can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. Generally an abnormal to severe rate of wear throughout the component. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Viscosity of sample indicates oil is within ISO 100 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



20 Jul 2023 Diag: Don Baldrige

WEAR



We advise that you check all areas where dirt can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. Moderate concentration of visible metal present. Generally an abnormal to severe rate of wear throughout the component. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Viscosity of sample indicates oil is within ISO 100 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



03 Jul 2023 Diag: Angela Borella

WEAR



We advise that you check all areas where dirt can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. Generally an abnormal to severe rate of wear throughout the component. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Viscosity of sample indicates oil is within ISO 100 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

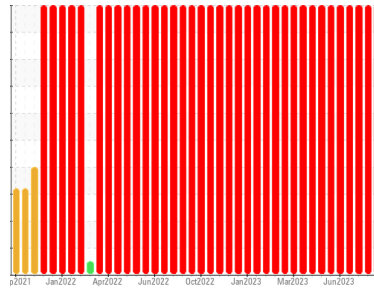

Area
Building 12
Machine Id
Cone 1
Component
Bulk Tank Lube System
Fluid
Mobilgear 629 (105 GAL)

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Wear

Generally an abnormal to severe rate of wear throughout the component.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

Viscosity of sample indicates oil is within ISO 300 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0820049	WC0820052	WC0820069
Sample Date	Client Info		18 Aug 2023	02 Aug 2023	20 Jul 2023
Machine Age	hrs	Client Info	1340	0	698
Oil Age	hrs	Client Info	1340	1570	0
Oil Changed	Client Info		Not Chngd	Not Chngd	N/A
Sample Status			SEVERE	SEVERE	SEVERE

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	191	317	296
Chromium	ppm	ASTM D5185m >20	1	3	2
Nickel	ppm	ASTM D5185m >20	11	16	18
Titanium	ppm	ASTM D5185m	2	4	4
Silver	ppm	ASTM D5185m	<1	<1	<1
Aluminum	ppm	ASTM D5185m >20	38	63	65
Lead	ppm	ASTM D5185m >20	258	309	321
Copper	ppm	ASTM D5185m >20	1232	1651	1797
Tin	ppm	ASTM D5185m >20	107	161	174
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	9	11	18
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	2	3	3
Manganese	ppm	ASTM D5185m	2	4	4
Magnesium	ppm	ASTM D5185m	23	33	33
Calcium	ppm	ASTM D5185m	59	72	79
Phosphorus	ppm	ASTM D5185m	221	225	274
Zinc	ppm	ASTM D5185m	113	118	119
Sulfur	ppm	ASTM D5185m	10960	10995	12626

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	110	178	198
Sodium	ppm	ASTM D5185m	12	22	26
Potassium	ppm	ASTM D5185m >20	6	9	7






FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.32	0.20	0.47

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.05	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

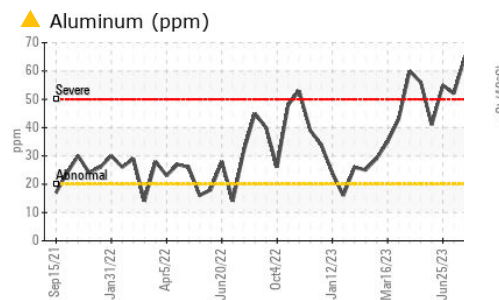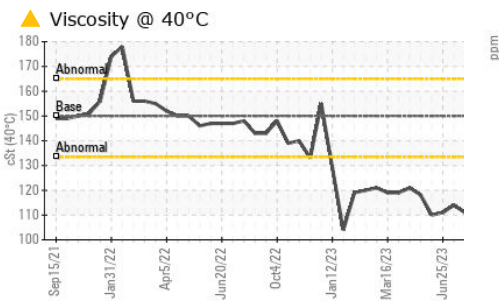
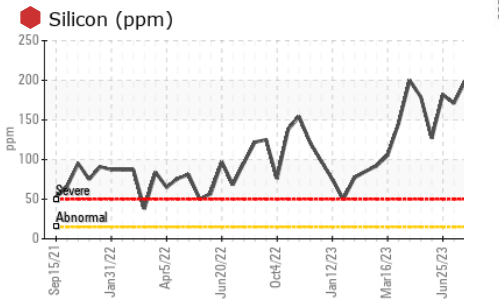
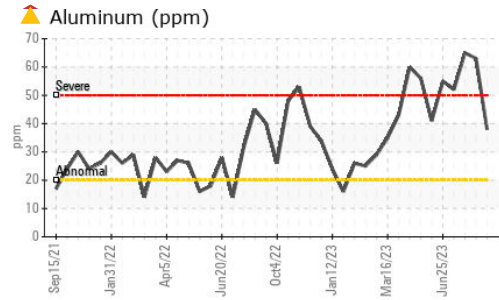
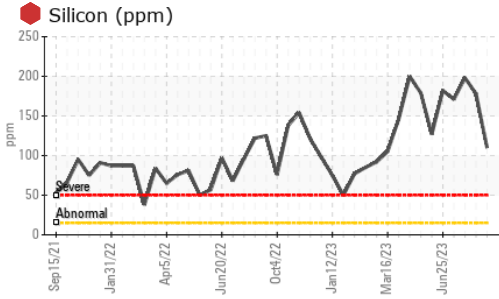


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	▲ 108	▲ 110	▲ 111

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

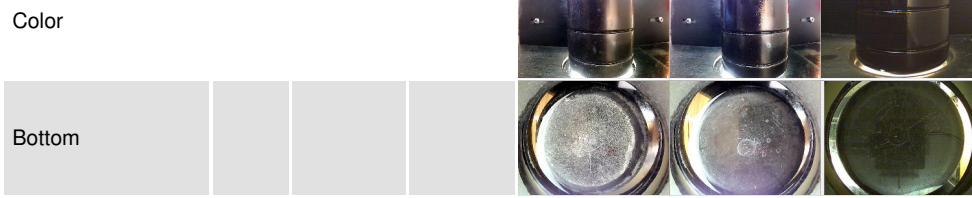

GRAPHS

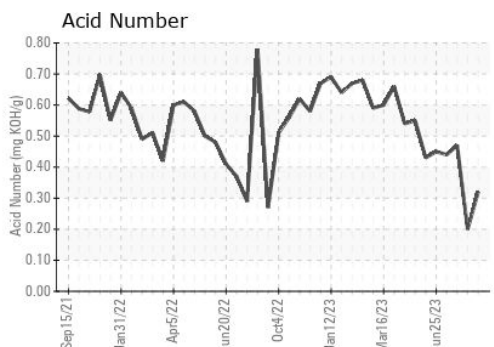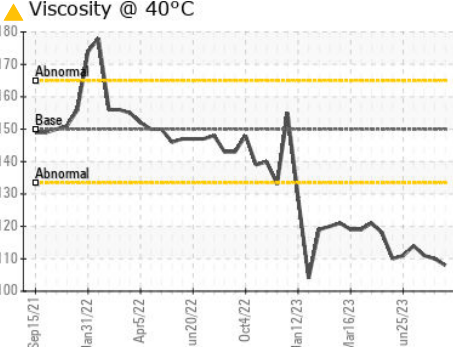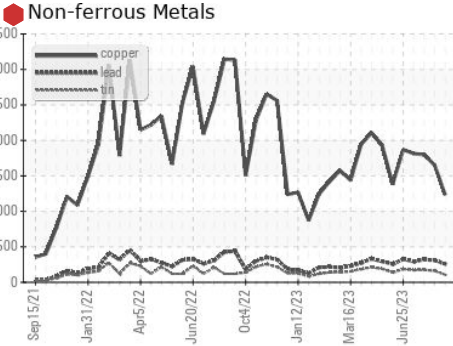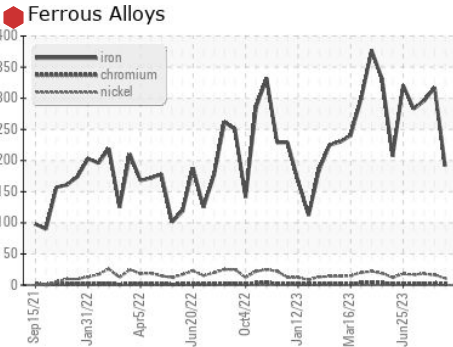

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0820049 **Received** : 24 Aug 2023
Lab Number : 05934418 **Diagnosed** : 27 Aug 2023
Unique Number : 10619689 **Diagnostician** : Don Baldrige
Test Package : IND 2

3M - PITTSBORO
 4191 NC 87 S
 MONCURE, NC
 US 27559
 Contact: CHARLES JARRELL
 cjarrell@mmm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: