




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

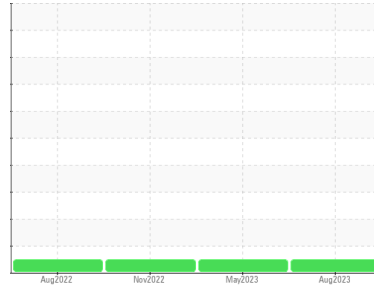

Machine Id
MACK GU813 R011 (S/N 1329107)

Component
Diesel Engine

Fluid
TRC PRO-SPEC V SYN BLEND 15W40 (44 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TR05934547	TR05857522	TR05713293
Sample Date	Client Info		18 Aug 2023	18 May 2023	29 Nov 2022
Machine Age	mls	Client Info	64472	53160	29683
Oil Age	mls	Client Info	11312	37890	14373
Oil Changed	Client Info		Not Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	29	54	22
Chromium	ppm	ASTM D5185m >20	0	1	<1
Nickel	ppm	ASTM D5185m >15	1	4	2
Titanium	ppm	ASTM D5185m >2	0	0	<1
Silver	ppm	ASTM D5185m >3	0	<1	<1
Aluminum	ppm	ASTM D5185m >20	3	8	8
Lead	ppm	ASTM D5185m >40	<1	3	3
Copper	ppm	ASTM D5185m >330	18	62	76
Tin	ppm	ASTM D5185m >15	1	4	3
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	3	7
Barium	ppm	ASTM D5185m	0	2	0
Molybdenum	ppm	ASTM D5185m	5	18	11
Manganese	ppm	ASTM D5185m	<1	1	1
Magnesium	ppm	ASTM D5185m	54	93	75
Calcium	ppm	ASTM D5185m	2453	2508	2431
Phosphorus	ppm	ASTM D5185m	913	912	845
Zinc	ppm	ASTM D5185m	1141	1143	1113
Sulfur	ppm	ASTM D5185m	4147	3878	3604

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	9	10
Sodium	ppm	ASTM D5185m	3	0	1
Potassium	ppm	ASTM D5185m >20	10	22	20

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.4	0.7	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.5	11.4	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.4	27.8	24.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.4	19.3	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	6.12	5.54	6.45











OIL ANALYSIS REPORT

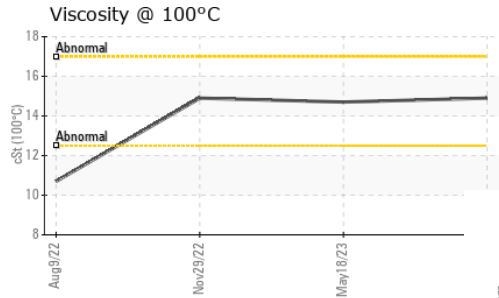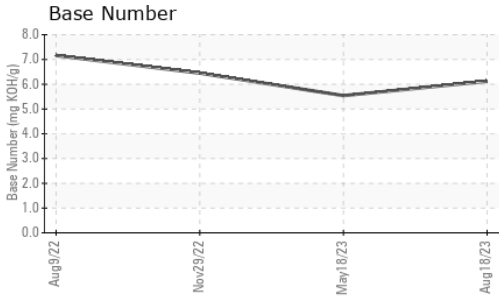

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	14.7	14.9

GRAPHS

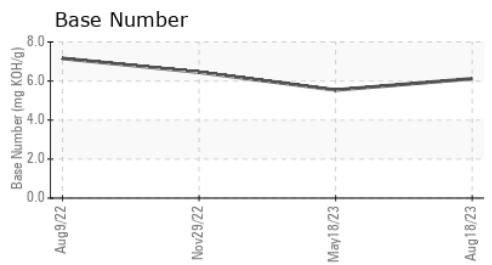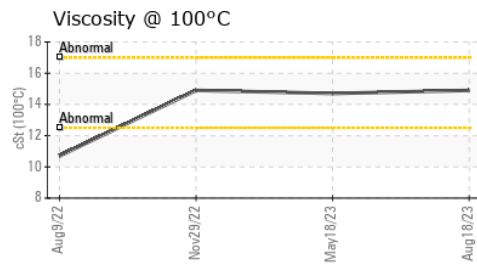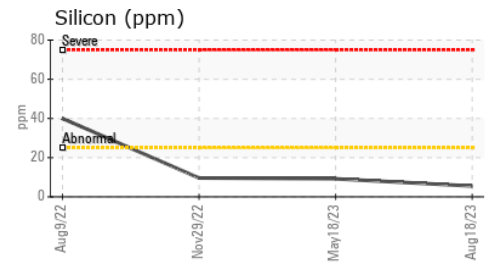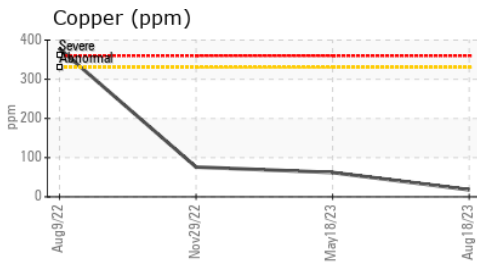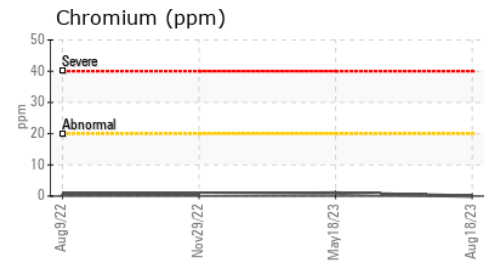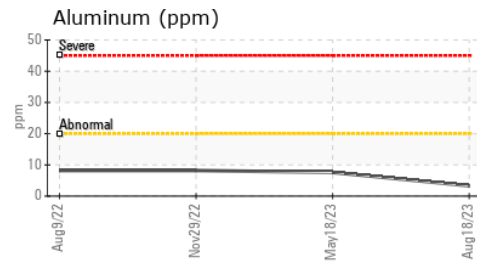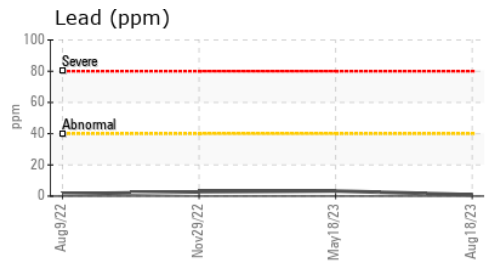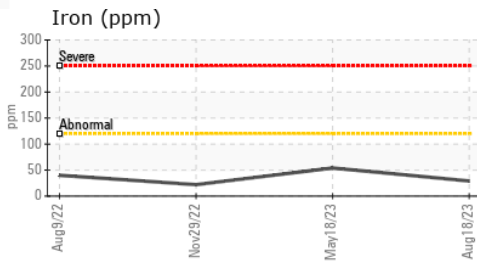

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05934547 **Received** : 24 Aug 2023
Lab Number : 05934547 **Diagnosed** : 25 Aug 2023
Unique Number : 10619818 **Diagnostician** : Wes Davis
Test Package : MOB 2

NORTHWEST REFUSE SERVICE
 2001 WINDSOR AVE
 BALTIMORE, MD
 US 21217
 Contact: JASON

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: