



# OIL ANALYSIS REPORT


Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/102/EG - OTHER SERVICE**  
Machine Id  
**87.14L [OKLAHOMA^102^EG - OTHER SERVICE]**

Component  
**Diesel Engine**  
Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

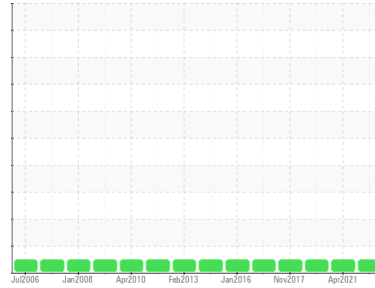

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0807980</b>	WC0562753	WC0527962
Sample Date	Client Info		<b>04 Aug 2023</b>	02 Apr 2021	21 Dec 2020
Machine Age	hrs	Client Info	<b>1500</b>	1284	1225
Oil Age	hrs	Client Info	<b>216</b>	63	50
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	<b>18</b>	5	9
Chromium	ppm	ASTM D5185m >11	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >31	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185m >26	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >26	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>79</b>	88	75
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>24</b>	8	41
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>700</b>	658	524
Calcium	ppm	ASTM D5185m	<b>1738</b>	1334	1615
Phosphorus	ppm	ASTM D5185m	<b>798</b>	687	766
Zinc	ppm	ASTM D5185m	<b>962</b>	799	889
Sulfur	ppm	ASTM D5185m	<b>3440</b>	2396	2198

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >22	<b>5</b>	3	5
Sodium	ppm	ASTM D5185m >31	<b>4</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.7</b>	7.2	7.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	20.6	21.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.6</b>	14.4	19.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>8.6</b>	9.7	10.1







# OIL ANALYSIS REPORT

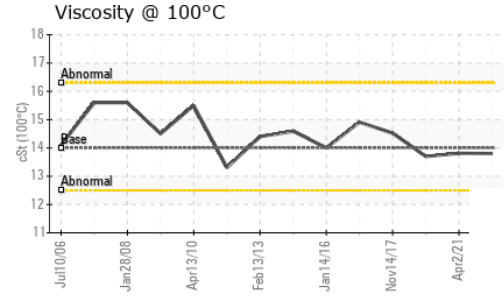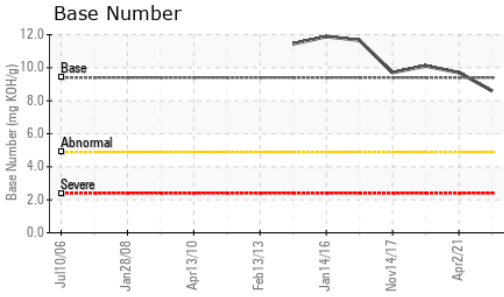

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>13.8</b>	13.81	13.7

### GRAPHS

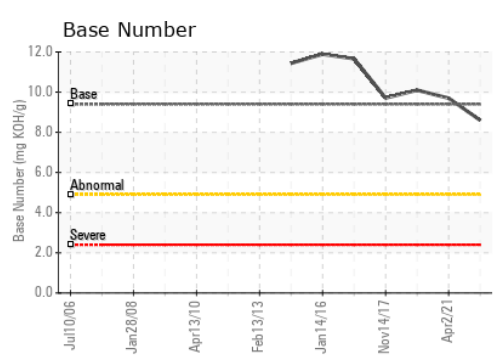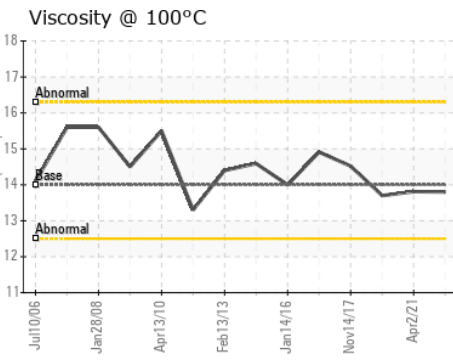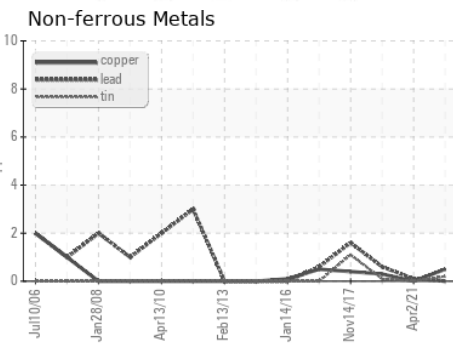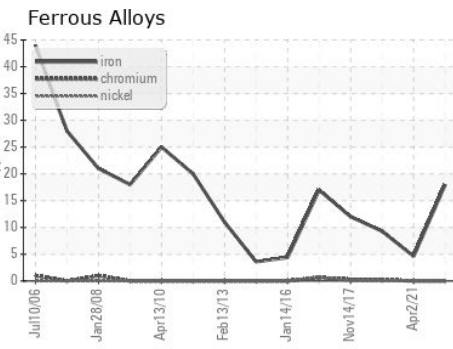

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0807980 **Received** : 25 Aug 2023  
**Lab Number** : 05934683 **Diagnosed** : 28 Aug 2023  
**Unique Number** : 10619954 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)