


# **OIL ANALYSIS REPORT**

## Sample Rating Trend



**NORMAL** 



Machine Id **551-534-TK4G-AG1** 

Component

Gearbox

**ROYAL PURPLE SYNFILM GT220 (--- GAL)** 

### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.


## **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


,		Nov2020	Feb2022	Aug2022 Mar2023	Aug2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0030172	RP0030153	RP0022341
Sample Date		Client Info		21 Aug 2023	07 Mar 2023	30 Aug 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		58	52	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	9	10	2
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	<1
Lead	ppm	ASTM D5185m	>100	<1	<1	0
Copper	ppm	ASTM D5185m	>200	<1	0	<1
Tin	ppm	ASTM D5185m	>25	0	0	<1
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	25	73	31
Calcium	ppm	ASTM D5185m		1	4	0
Phosphorus	ppm	ASTM D5185m		5	6	12
Zinc	ppm	ASTM D5185m		7	6	9
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	3	6
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water	%	ASTM D6304	>0.2	0.026	0.013	0.015
ppm Water	ppm	ASTM D6304	>2000	261.2	130.6	151.5
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	0.45	0.47	0.32




# **OIL ANALYSIS REPORT**

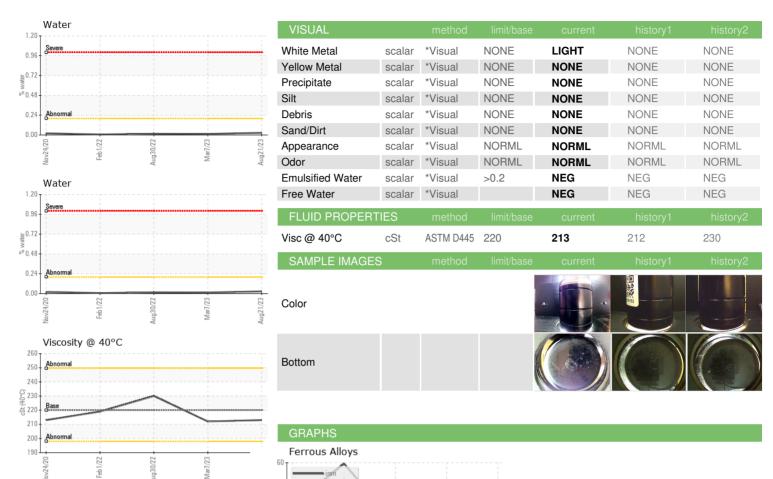



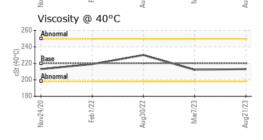







Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: RP0030172 : 05934888 : 10620159 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 25 Aug 2023 Received : 28 Aug 2023 Diagnosed

: Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369.

76 PORCUPINE RD PEDRICKTOWN, NJ US 08067 Contact: MIKE MANGINI michael\_mangini@oxy.com T: (856)472-1248

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

**OXY VINYLS**