




OIL ANALYSIS REPORT

Sample Rating Trend

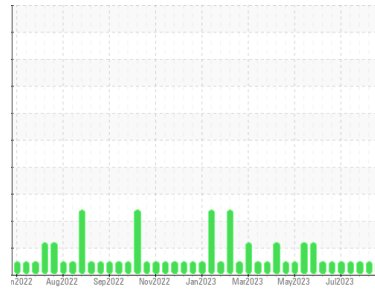

NORMAL



Machine Id
Grand Blanc CAT 3 GBLM03BE
 Component
Biogas Engine
 Fluid
CHEVRON HDAX 6500 LFG GAS ENGINE OIL (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: 400hr Oil Sample)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0825008	WC0825013	WC0825017
Sample Date	Client Info		21 Aug 2023	13 Aug 2023	01 Aug 2023
Machine Age	hrs	Client Info	78406	78214	77997
Oil Age	hrs	Client Info	381	0	900
Oil Changed	Client Info		Not Chngd	N/A	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>15	2	2	4
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>6	2	1	2
Lead	ppm	ASTM D5185m	>9	<1	0	2
Copper	ppm	ASTM D5185m	>14	5	4	11
Tin	ppm	ASTM D5185m	>4	1	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		3	<1	4
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		10	8	18
Calcium	ppm	ASTM D5185m		1919	1953	2041
Phosphorus	ppm	ASTM D5185m		273	283	299
Zinc	ppm	ASTM D5185m		355	341	375
Sulfur	ppm	ASTM D5185m		3725	3538	4251

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>181	91	60	126
Sodium	ppm	ASTM D5185m		0	2	5
Potassium	ppm	ASTM D5185m	>20	2	0	1

INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0.1	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.2	5.8	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.3	19.9	24.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.2	11.8	15.9
Acid Number (AN)	mg KOH/g	ASTM D8045	1.2	1.96	1.29	1.90
Base Number (BN)	mg KOH/g	ASTM D2896	4.5	4.04	4.02	2.62











OIL ANALYSIS REPORT

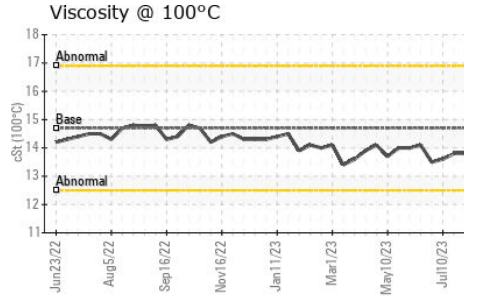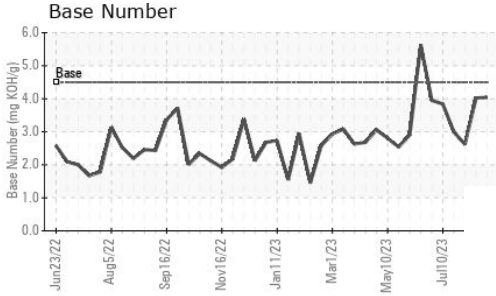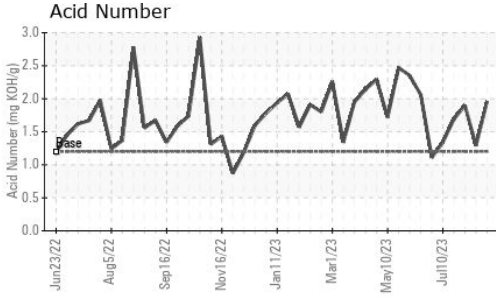

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	13.7	13.5

GRAPHS

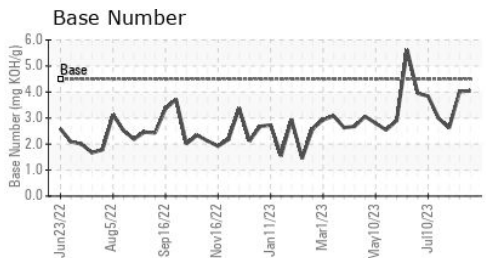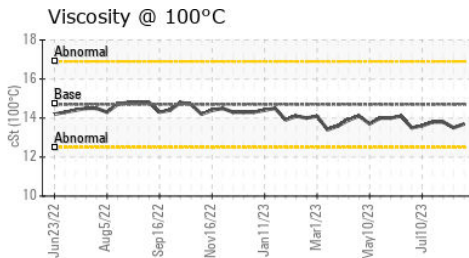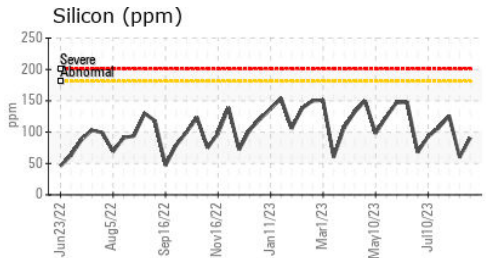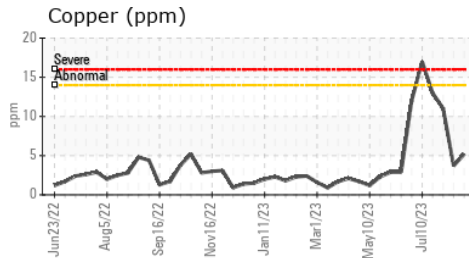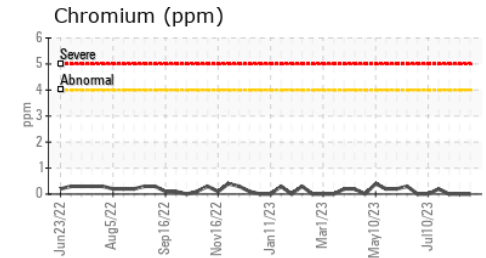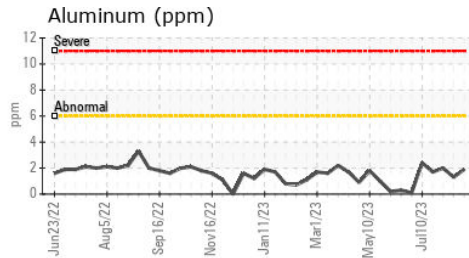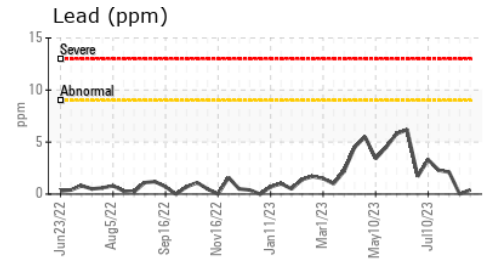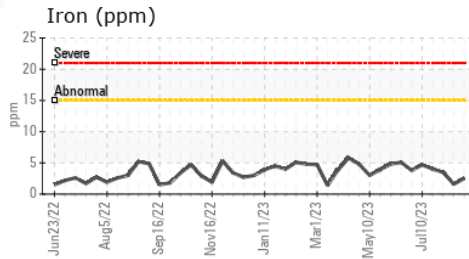

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0825008 Received : 25 Aug 2023
 Lab Number : 05934955 Diagnosed : 28 Aug 2023
 Unique Number : 10620226 Diagnostician : Sean Felton
 Test Package : MOB 2

EDL NA Recips-Grand Blanc
 Grand Blanc Powerstation, 2361 West Grand Blanc Road
 Grand Blanc, MI
 US 48439
 Contact: Tony Saint Marie
 tony.saintmarie@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: