


PROBLEM SUMMARY

COLORADO/443/EG - SCRAPER 76.34L [COLORADO^443^EG - SCRAPER] **Diesel Engine**


MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

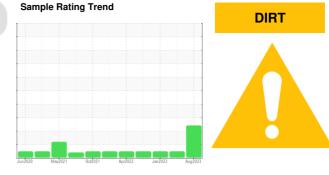


COMPONENT CONDITION SUMMARY

Componen

Fluic

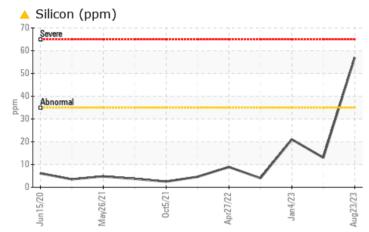

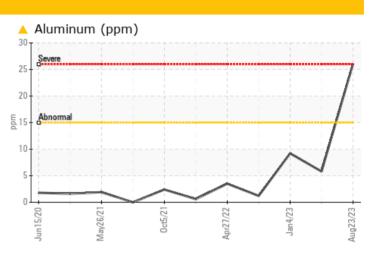

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC ⁻	TEST RE	ESULTS				
Sample Status				ABNORMAL	NORMAL	NORMAL
Aluminum	ppm	ASTM D5185m	>15	<u> </u>	6	9
Silicon	maa	ASTM D5185m	>35	5 7	13	21

Customer Id: SHEWIC Sample No.: WC0823148 Lab Number: 05935193 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Change Fluid			?	Oil and filter change at the time of sampling has been noted.			
Change Filter			?	Oil and filter change at the time of sampling has been noted.			
Check Dirt Access			?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.			

HISTORICAL DIAGNOSIS



10 Mar 2023 Diag: Wes Davis

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.




view report

04 Jan 2023 Diag: Jonathan Hester


Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

30 Aug 2022 Diag: Aaron Black












OIL ANALYSIS REPORT

Area COLORADO/443/EG - SCRAPER Machine Id 76.34L [COLORADO^443^EG - SCRAPER] Component

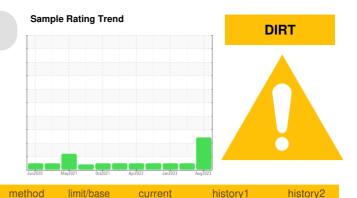

Diesel Engine

MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

SAMPLE INFORMATION

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

🔺 Wear

All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sample Number		Client Info		WC0823148	WC0766211	WC0766216
Sample Date		Client Info		23 Aug 2023	10 Mar 2023	04 Jan 2023
Machine Age	hrs	Client Info		16489	16250	15916
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
CONTAMINATION	١	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>86	23	17	16
Chromium	ppm	ASTM D5185m	>3	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>2	3	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	<u> </u>	6	9
Lead	ppm	ASTM D5185m	>16	<1	<1	<1
Copper	ppm	ASTM D5185m	>250	41	14	21
Tin	ppm	ASTM D5185m	>2	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	51	41	45
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	41	39	40
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	534	480	472
Calcium	ppm	ASTM D5185m		1766	1635	1744
Phosphorus	ppm	ASTM D5185m		779	691	746
Zinc	ppm	ASTM D5185m		957	848	929
Sulfur	ppm	ASTM D5185m		3037	2730	2558
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	6 57	13	21
Sodium	ppm	ASTM D5185m		3	<1	2
Potassium	ppm	ASTM D5185m	>20	5	0	3
INFRA-RED		method	limit/base	current	history1	history2
			>3	0.8	0.9	0.8
Soot %	%	*ASTM D7844	20	0.0		
Soot % Nitration	% Abs/cm	*ASTM D7844 *ASTM D7624		7.0	7.7	7.4
			>20			7.4 22.9
Nitration	Abs/cm Abs/.1mm	*ASTM D7624	>20	7.0	7.7	
Nitration Sulfation	Abs/cm Abs/.1mm	*ASTM D7624 *ASTM D7415	>20 >30	7.0 22.3	7.7 23.2	22.9



OIL ANALYSIS REPORT

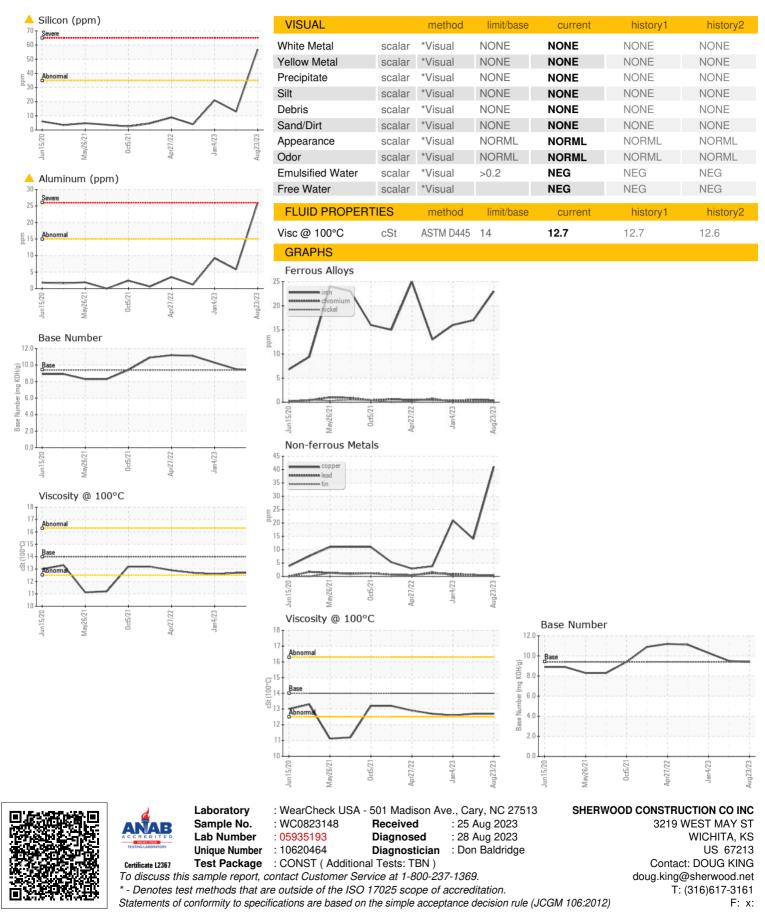

Page 4 of 4