



### **PROBLEM SUMMARY**

## KAESER BSD 50 3883594 (S/N 1306)

Compressor

KAESER SIGMA (OEM) S-460 (--- PNT)

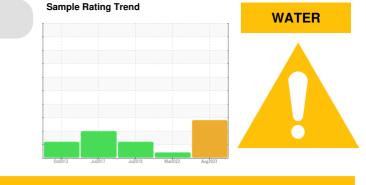

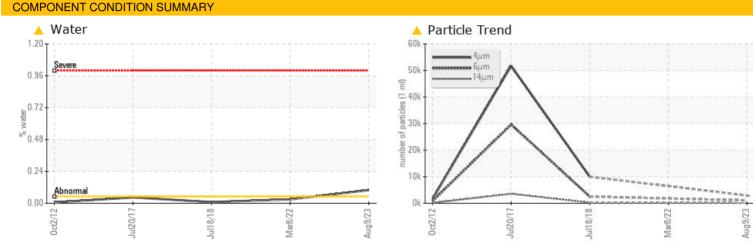

### RECOMMENDATION

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

#### **PROBLEMATIC TEST RESULTS** ABNORMAL Sample Status ABNORMAL ABNORMAL % Water ASTM D6304 >0.05 0.099 0.029 0.009 ppm Water ASTM D6304 >500 995.4 296.5 90 ppm **A** 248 Particles >14µm ASTM D7647 >80 136 Particles >21µm ASTM D7647 >20 **4**3 77 **Oil Cleanliness** ISO 4406 (c) >--/17/13 🔺 19/17/14 🔺 19/15

Customer Id: CAMSTR Sample No.: KC05935418 Lab Number: 05935418 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 08 Mar 2022 Diag: Angela Borella

VIS DEBRIS



Oil and filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

#### 18 Jul 2018 Diag: Jonathan Hester



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

20 Jul 2017 Diag: Doug Bogart

#### CONTAMINANT



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





view report

view report





### **OIL ANALYSIS REPORT**

# KAESER BSD 50 3883594 (S/N 1306)

**Compressor** 

KAESER SIGMA (OEM) S-460 (--- PNT)

### DIAGNOSIS

### Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

### Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid.

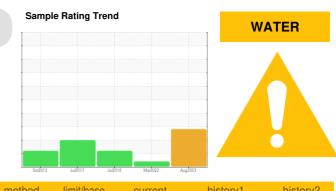

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC05935418	KC100112	KC75059
Sample Date		Client Info		09 Aug 2023	08 Mar 2022	18 Jul 2018
Machine Age	hrs	Client Info		81533	73617	50042
Oil Age	hrs	Client Info		0	8793	8378
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	2	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	10	13	13
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
	lele			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	0	0	2
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		27	180	<1
Zinc	ppm	ASTM D5185m		0	0	38
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		1	0	2
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.05	<u> </u>	0.029	0.009
ppm Water	ppm	ASTM D6304	>500	<b>4</b> 995.4	296.5	90
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2920		9958
Particles >6µm		ASTM D7647	>1300	1065		<b>2</b> 504
Particles >14µm		ASTM D7647	>80	<b>A</b> 136		🔺 248
Particles >21µm		ASTM D7647	>20	<u> </u>		<b>A</b> 77
Particles >38µm		ASTM D7647	>4	2		4
Particles >71µm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>19/17/14</b>		<b>1</b> 9/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.41	0.49	0.396


Report Id: CAMSTR [WUSCAR] 05935418 (Generated: 08/28/2023 15:58:21) Rev: 1


Contact/Location: ? ? - CAMSTR




## **OIL ANALYSIS REPORT**

method

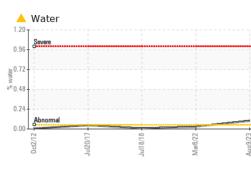

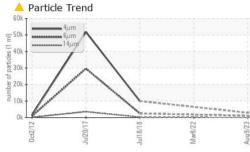

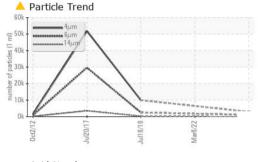

0.50

(B/HOX

₽°0.3

đ 0.20

Pio 0.10

0.00

52


5

43

4(

3

Πh

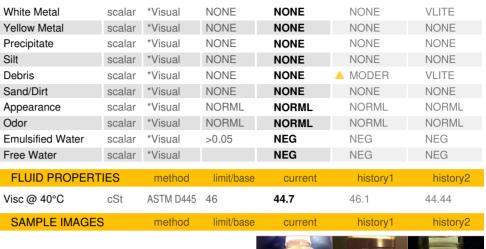


limit/base

current

Color


VISUAL



history1

history2

Bottom

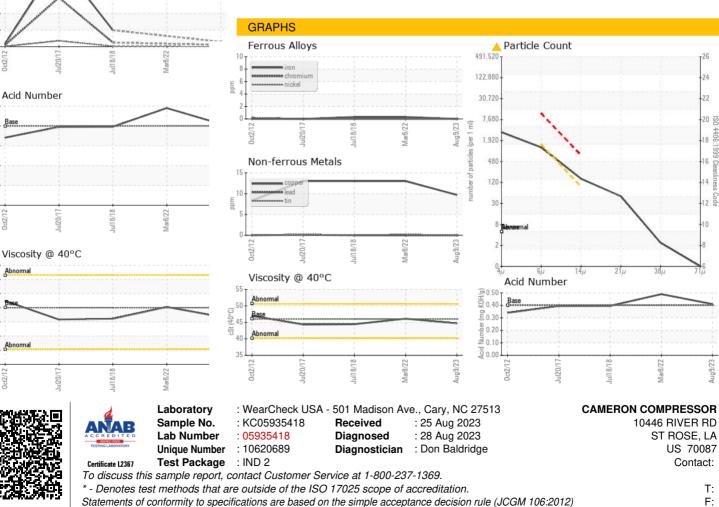

Contact/Location: ? ? - CAMSTR