

## **OIL ANALYSIS REPORT**

#### Machine ROGERS FSS ROGERS 100 HP (S/N NA106723) Component

**Air Compressor** Fluic

USPI MAX FG AIR 46 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.








SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM25196	USPM18337	USPM25197
Sample Date		Client Info		20 Aug 2023	15 May 2023	15 Dec 2022
Machine Age	hrs	Client Info		39482	39064	39044
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	<1	0
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m	~ 1	0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum		ASTM D5185m	>10	0	<1	<1
	ppm			-		
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>40	<1	<1	<1
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	0	0	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	3	2	0
Zinc	ppm	ASTM D5185m	0	0	3	<1
Sulfur	ppm	ASTM D5185m	0	45	0	14
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>25	0	<1	<1
Sodium	ppm	ASTM D5185m	>20	<1	1	<1
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D5105III		0.016	0.013	0.006
ppm Water	ppm	ASTM D0304 ASTM D6304	>6000	168.0	135.7	61.8
FLUID CLEANLIN						
			limit/base	current	history1	history2
Particles >4µm		ASTM D7647		640	197	383
Particles >6µm		ASTM D7647	>2500	160	46	96
Particles >14µm		ASTM D7647	>320	15	7	9
Particles >21µm		ASTM D7647	>80	5	2	2
Particles >38µm		ASTM D7647	>20	0	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/14/11	15/13/10	16/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.16	0.68	0.70	0.58



# **OIL ANALYSIS REPORT**







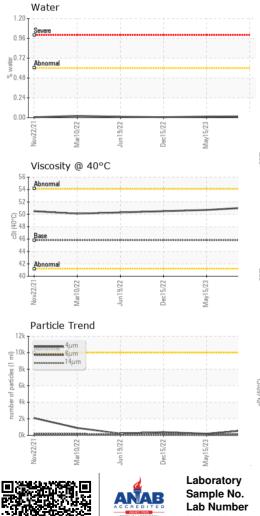

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.6	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.8	51.1	50.7	50.5
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					Air Quincy 101 WC ID: 367864 TWIFAS	41 100 27:033 1753
Bottom						



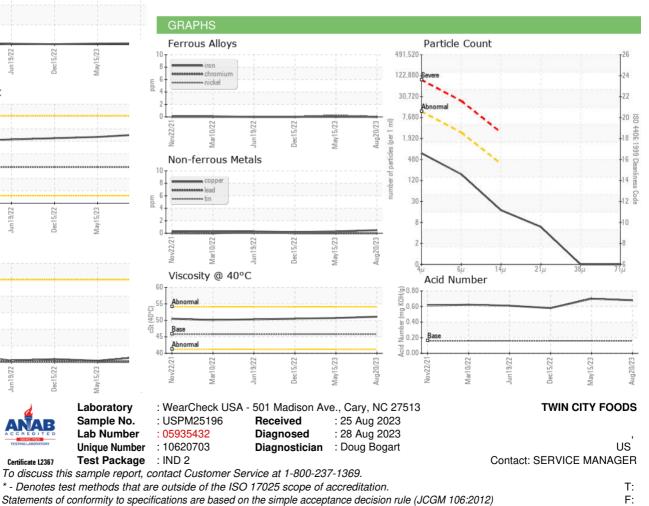



Contact/Location: SERVICE MANAGER ? - TWIPAS