



# **PROBLEM SUMMARY**

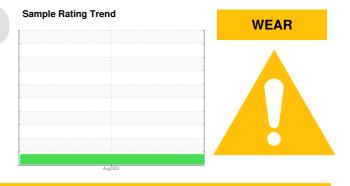

# Machine Id MHTF\_B3 MHTF\_B3\_M3 Component

Prive End Bearing Fluid ROYAL PURPLE SYNFILM GT 32 (--- GAL)

# COMPONENT CONDITION SUMMARY

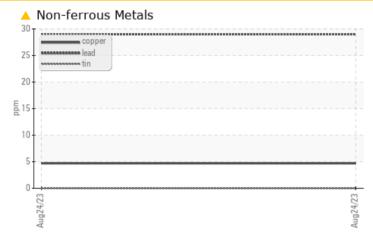

# RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL					
Lead	ppm	ASTM D5185m	>20	<u> </u>					

Customer Id: ENEAST Sample No.: RP0033062 Lab Number: 05935510 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend

WEAR

### Machine Id MHTF\_B3 MHTF\_B3\_M3 Component

Drive End Bearing Fluid ROYAL PURPLE SYNFILM GT 32 (--- GAL)

# DIAGNOSIS

### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### 🔺 Wear

The lead level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMA	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0033062		
Sample Date		Client Info		24 Aug 2023		
•	hrs	Client Info		0		
Ū	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status				ABNORMAL		
			11 11 /1	-		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	<mark>/</mark> 29		
Copper	ppm	ASTM D5185m	>20	5		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		2		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		<1		
-	ppm	ASTM D5185m		72		
-	ppm	ASTM D5185m		4		
		ASTM D5185m		3		
	ppm	ASTM D5185m		6		
	ppm			0		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>2	0.012		
ppm Water	ppm	ASTM D6304		128.3		
FLUID DEGRADAT	ION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.477		
VISUAL		method	limit/base	current	history1	history2
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
·	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NORML	NORML		
	scalar	*Visual	NORML	NORML		
	scalar scalar	*Visual *Visual	>2	NEG NEG	n: QUITA MOR	CAN ENEAS



# **OIL ANALYSIS REPORT**



Contact/Location: QUITA MORGAN - ENEAST