




PROBLEM SUMMARY

Sample Rating Trend

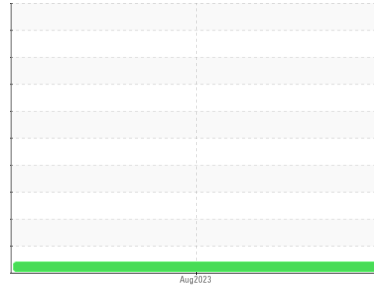

VISCOSITY




Machine Id
SZLG232704

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

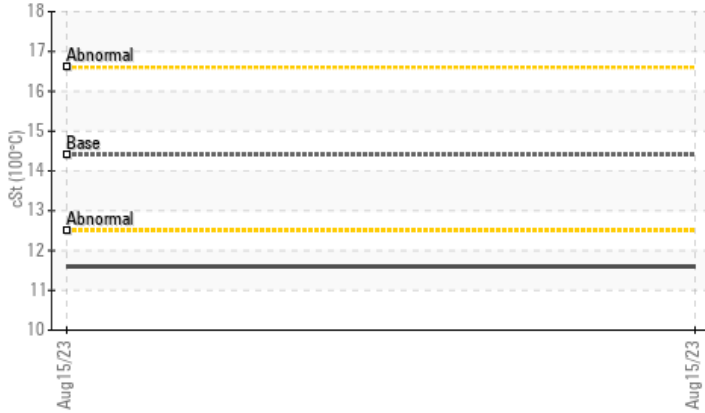

RECOMMENDATION

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.6	---	---

Customer Id: DOLGUL
 Sample No.: WC0847155
 Lab Number: 05935874
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

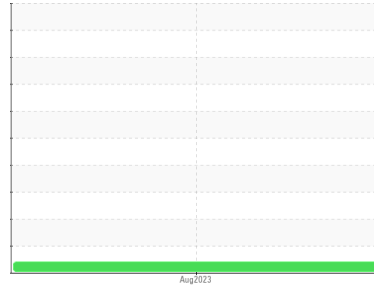

VISCOSITY



Machine Id

SZLG232704

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0847155	---	---
Sample Date	Client Info		15 Aug 2023	---	---
Machine Age	hrs	Client Info	1241	---	---
Oil Age	hrs	Client Info	1241	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	17	---	---
Chromium	ppm	ASTM D5185m >20	2	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	5	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	7	---	---
Tin	ppm	ASTM D5185m >15	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	122	---	---
Barium	ppm	ASTM D5185m 10	0	---	---
Molybdenum	ppm	ASTM D5185m 100	63	---	---
Manganese	ppm	ASTM D5185m	1	---	---
Magnesium	ppm	ASTM D5185m 450	399	---	---
Calcium	ppm	ASTM D5185m 3000	2001	---	---
Phosphorus	ppm	ASTM D5185m 1150	1042	---	---
Zinc	ppm	ASTM D5185m 1350	1261	---	---
Sulfur	ppm	ASTM D5185m 4250	4179	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	---	---
Sodium	ppm	ASTM D5185m >158	68	---	---
Potassium	ppm	ASTM D5185m >20	<1	---	---
Fuel	%	ASTM D3524 >5	0.5	---	---
Glycol	%	*ASTM D2982	0.0	---	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	7.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.8	---	---



OIL ANALYSIS REPORT






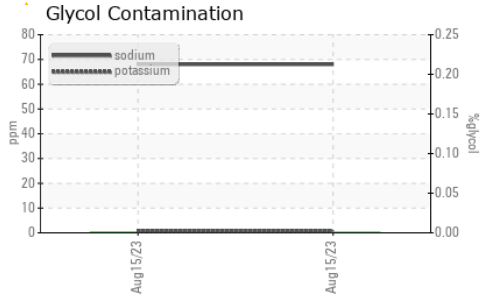


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

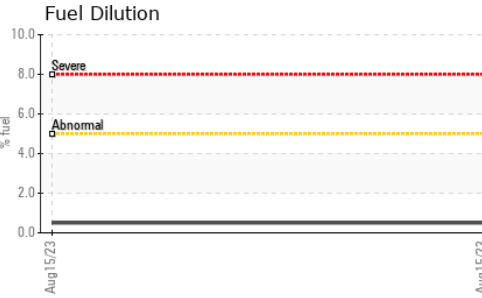

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.6	---	---

GRAPHS

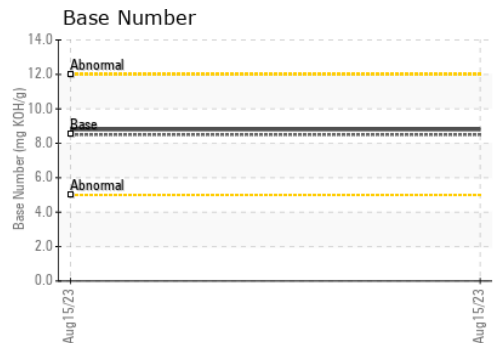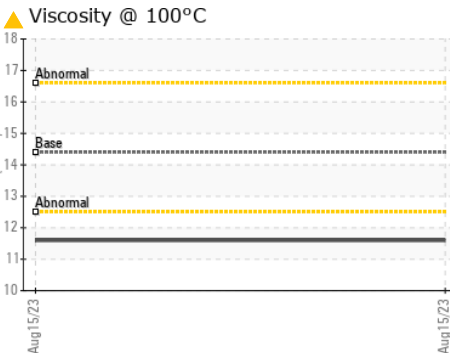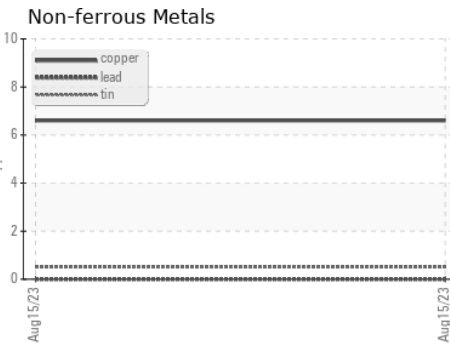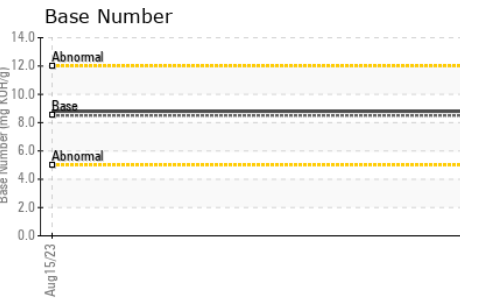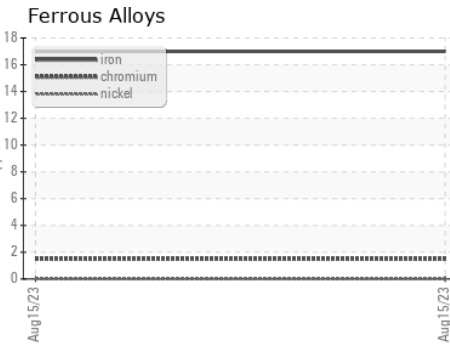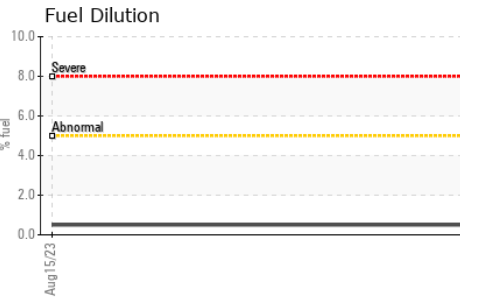

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0847155 **Received** : 28 Aug 2023
Lab Number : 05935874 **Diagnosed** : 01 Sep 2023
Unique Number : 10621145 **Diagnostician** : Doug Bogart
Test Package : FLEET (Additional Tests: FuelDilution, Glycol, PercentFuel)

DOLE FRESH FRUIT
 PO BOX 1689
 GULFPORT, MS
 US 39502

Contact: JORDAN JOHNSTON
 jordan.johnston@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (228)867-2970