




PROBLEM SUMMARY

Sample Rating Trend

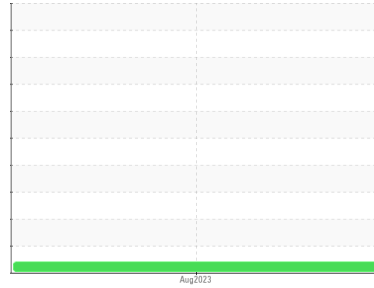


VISCOSITY



Area
Cluster
 Machine Id
PETERBILT 2341
 Component
Diesel Engine
 Fluid
GIBRALTAR 15W/40 SUPER S-3 LX (11)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

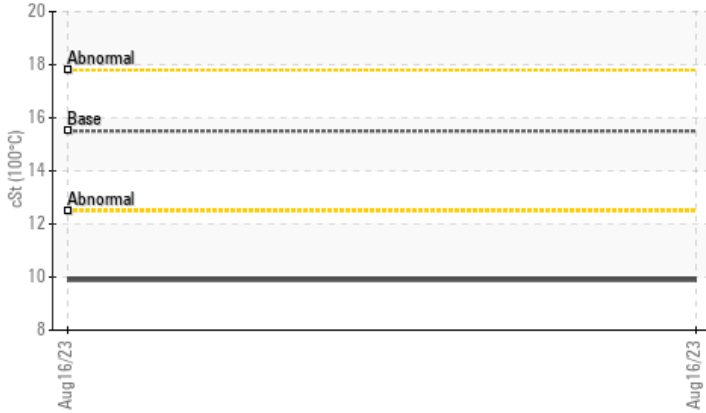

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Visc @ 100°C	cSt	ASTM D445	15.5	▲ 9.9	---	---

Customer Id: INTCLO
 Sample No.: WC0830968
 Lab Number: 05935894
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

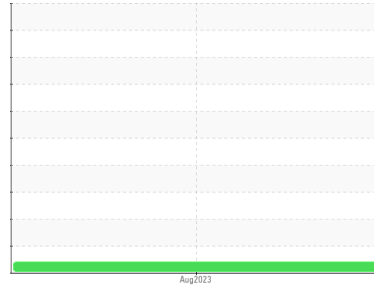

VISCOSITY



Area
Cluster
 Machine Id
PETERBILT 2341
 Component
Diesel Engine
 Fluid
GIBRALTAR 15W/40 SUPER S-3 LX (11)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0830968	---	---
Sample Date	Client Info		16 Aug 2023	---	---
Machine Age	hrs	Client Info	10876	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	8	---	---
Chromium	ppm	ASTM D5185m >4	<1	---	---
Nickel	ppm	ASTM D5185m >2	0	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >25	4	---	---
Lead	ppm	ASTM D5185m >45	<1	---	---
Copper	ppm	ASTM D5185m >85	1	---	---
Tin	ppm	ASTM D5185m >4	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	20	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m 66	56	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m 1000	747	---	---
Calcium	ppm	ASTM D5185m 1050	1269	---	---
Phosphorus	ppm	ASTM D5185m 1150	1000	---	---
Zinc	ppm	ASTM D5185m 1270	1204	---	---
Sulfur	ppm	ASTM D5185m	4066	---	---




CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	9	---	---
Sodium	ppm	ASTM D5185m	9	---	---
Potassium	ppm	ASTM D5185m >20	18	---	---
Fuel	%	ASTM D3524 >5	1.6	---	---

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	8.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	11.7	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	12.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	15.1	---	---







OIL ANALYSIS REPORT

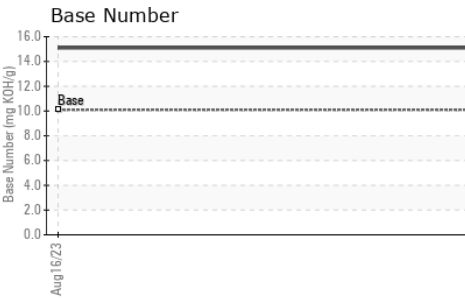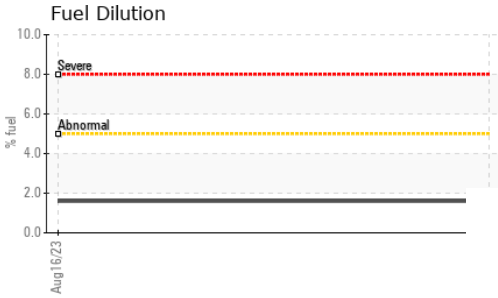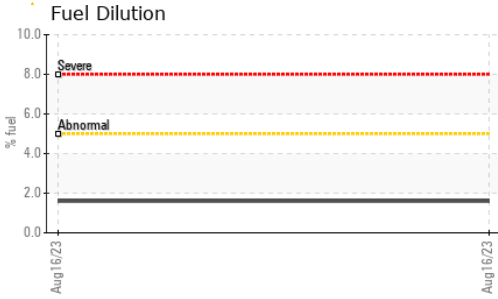

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	▲ 9.9	---	---

GRAPHS

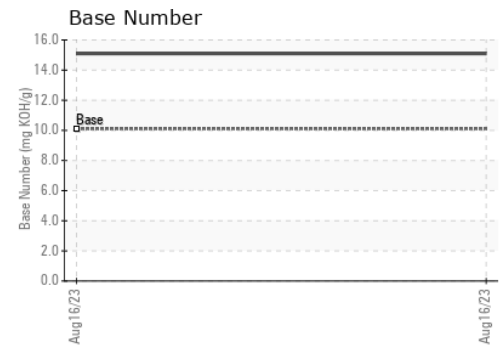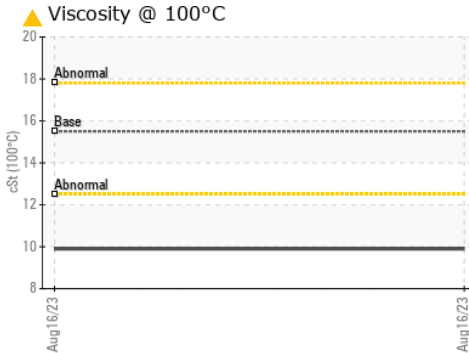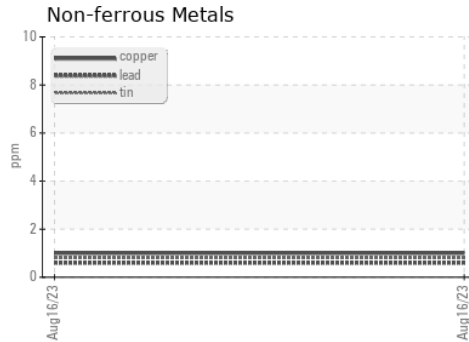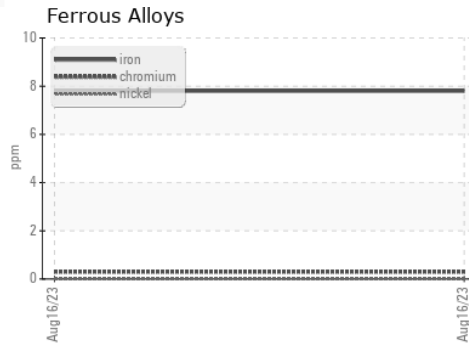

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0830968 **Received** : 28 Aug 2023
Lab Number : **05935894** **Diagnosed** : 30 Aug 2023
Unique Number : 10621165 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

INTERSTATE WASTE-CLOSTER
 77 RAILROAD AVENUE
 CLOSTER, NJ
 US 07624
 Contact: Tony Gagliano
 tgagliano@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: