




# OIL ANALYSIS REPORT



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CATERPILLAR DIESEL. 131353**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)**

Sample Rating Trend

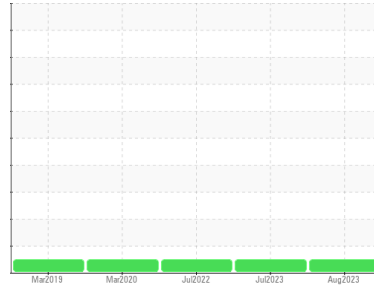

**NORMAL**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>SBP0004632</b>	SBP0004533	SBP0001201	
Sample Date	Client Info	<b>22 Aug 2023</b>	13 Jul 2023	29 Jul 2022	
Machine Age	hrs	Client Info	<b>2947</b>	0	2416
Oil Age	hrs	Client Info	<b>531</b>	393	518
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	0.2	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>45</b>	31	48
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >25	<b>11</b>	7	7
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>5</b>	4	7
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>8</b>	15	23
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>61</b>	53	36
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m	<b>900</b>	876	562
Calcium	ppm ASTM D5185m	<b>1534</b>	1413	1784
Phosphorus	ppm ASTM D5185m	<b>1034</b>	976	727
Zinc	ppm ASTM D5185m	<b>1282</b>	1241	962
Sulfur	ppm ASTM D5185m	<b>3548</b>	3579	3126

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>15</b>	10	12
Sodium	ppm ASTM D5185m	<b>12</b>	9	3
Potassium	ppm ASTM D5185m >20	<b>6</b>	7	0
Chlorine	ppm ASTM D5185m	<b>---</b>	---	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>10.5</b>	9.6	12.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.9</b>	20.4	23.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.7</b>	18.1	24.1
Base Number (BN)	mg KOH/g ASTM D2896 10.5	<b>7.3</b>	8.8	8.2







# OIL ANALYSIS REPORT

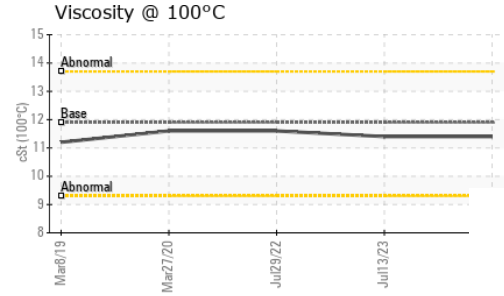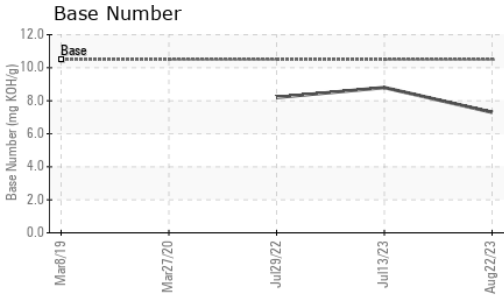

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.4</b>	11.4	11.6

## GRAPHS

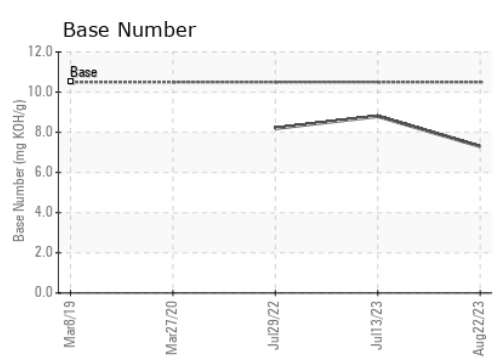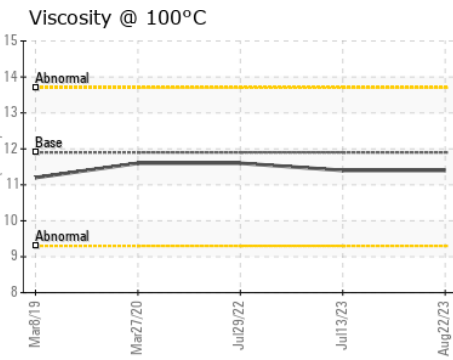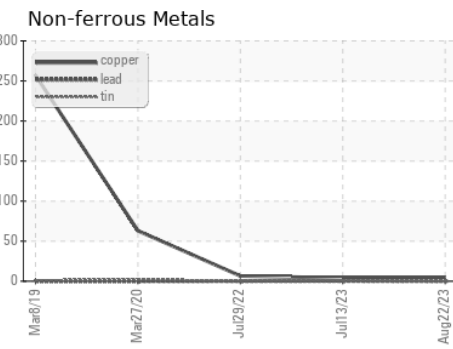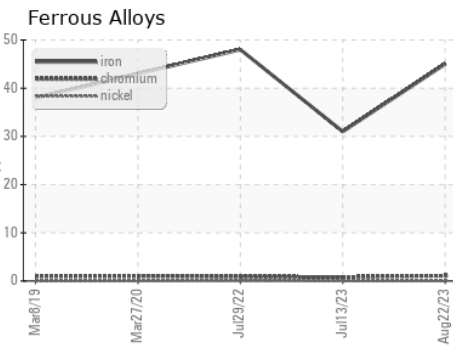

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004632 **Received** : 28 Aug 2023  
**Lab Number** : **05935938** **Diagnosed** : 29 Aug 2023  
**Unique Number** : 10621209 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)