





# OIL ANALYSIS REPORT



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CATERPILLAR C-9 060243**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)**

Sample Rating Trend

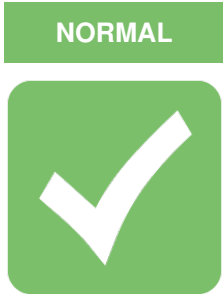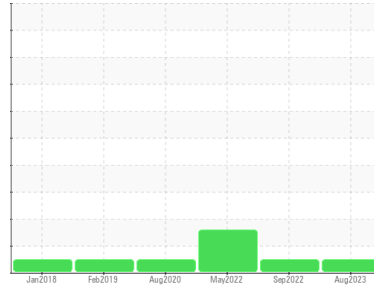

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>SBP0004603</b>	SBP0001262	SBP0000713
Sample Date	Client Info	<b>23 Aug 2023</b>	15 Sep 2022	04 May 2022
Machine Age	hrs	<b>5864</b>	5370	4854
Oil Age	hrs	<b>494</b>	511	586
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>14</b>	13	14
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>3</b>	4	5
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>3</b>	8	58
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>64</b>	51	27
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m	<b>1002</b>	818	543
Calcium	ppm ASTM D5185m	<b>1188</b>	1056	1535
Phosphorus	ppm ASTM D5185m	<b>1118</b>	931	766
Zinc	ppm ASTM D5185m	<b>1338</b>	1103	913
Sulfur	ppm ASTM D5185m	<b>3969</b>	3044	2361

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	10	▲ 32
Sodium	ppm ASTM D5185m	<b>2</b>	<1	2
Potassium	ppm ASTM D5185m >20	<b>0</b>	0	2
Chlorine	ppm ASTM D5185m	<b>---</b>	---	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.2	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.5</b>	9.2	10.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.3</b>	21.6	22.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.5</b>	19.5	20.9
Base Number (BN)	mg KOH/g ASTM D2896 10.5	<b>8.7</b>	10.1	9.2







# OIL ANALYSIS REPORT

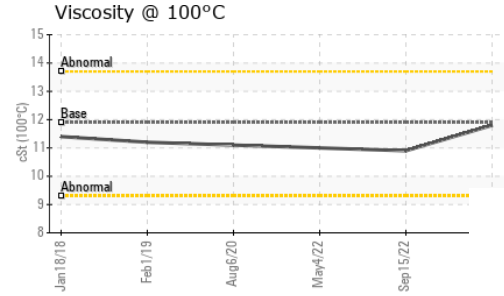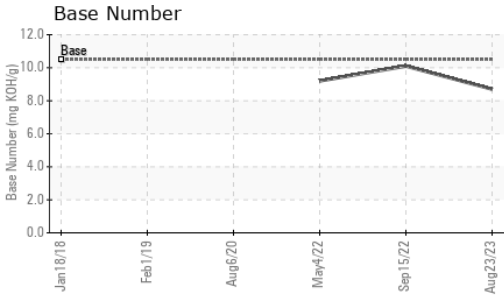

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.8</b>	10.9	11.0

## GRAPHS

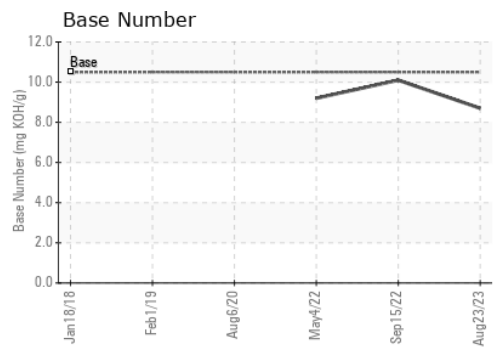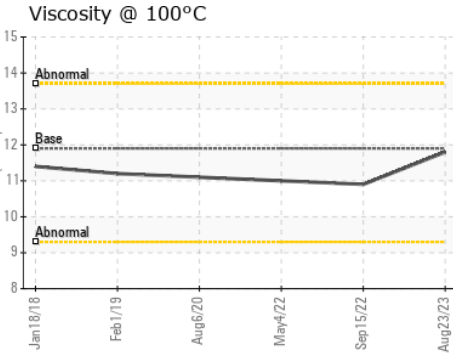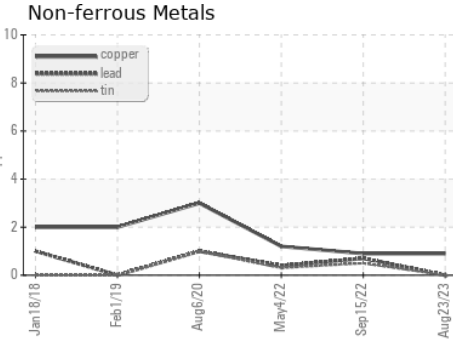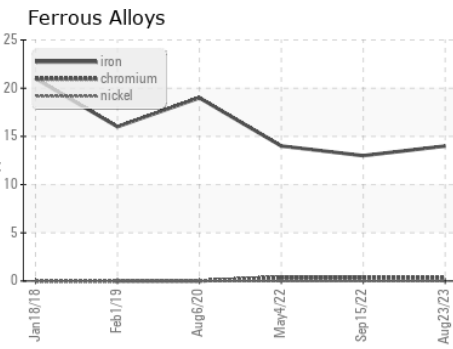

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004603 **Received** : 28 Aug 2023  
**Lab Number** : 05935940 **Diagnosed** : 29 Aug 2023  
**Unique Number** : 10621211 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)