




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

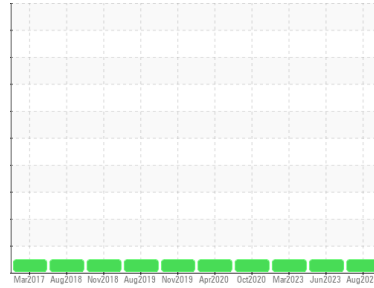

Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CUMMINS B5.9-160 13-0359**  
 Component  
**Front Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>SBP0004640</b>	SBP0004437	SBP0003705
Sample Date	Client Info	<b>23 Aug 2023</b>	04 Jun 2023	17 Mar 2023
Machine Age	hrs	<b>22802</b>	22453	22101
Oil Age	hrs	<b>349</b>	352	327
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>7</b>	8	9
Chromium	ppm ASTM D5185m >15	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>2</b>	2	2
Lead	ppm ASTM D5185m >50	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >170	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >4	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>24</b>	13	15
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>59</b>	52	53
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m	<b>914</b>	864	820
Calcium	ppm ASTM D5185m	<b>1369</b>	1234	1194
Phosphorus	ppm ASTM D5185m	<b>1050</b>	955	953
Zinc	ppm ASTM D5185m	<b>1258</b>	1170	1136
Sulfur	ppm ASTM D5185m	<b>3772</b>	3608	2978

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	6
Sodium	ppm ASTM D5185m	<b>2</b>	3	0
Potassium	ppm ASTM D5185m >20	<b>0</b>	<1	1
Chlorine	ppm ASTM D5185m	<b>---</b>	---	---

### INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>5.1</b>	5.2	5.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.6</b>	18.7	18.3

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.0</b>	14.2	13.9
Base Number (BN)	mg KOH/g ASTM D2896 10.5	<b>9.5</b>	9.5	9.7







# OIL ANALYSIS REPORT

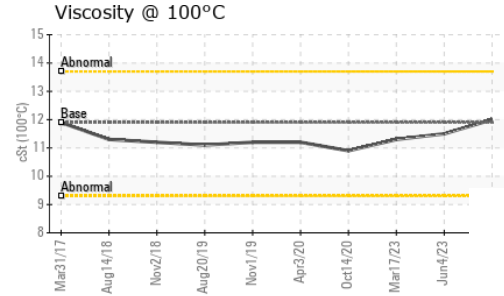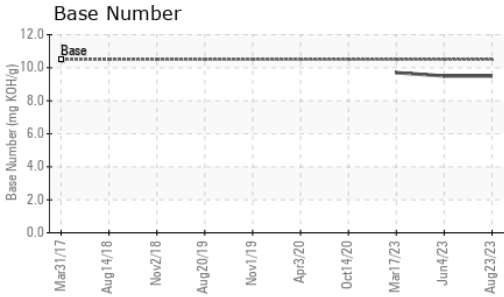

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	<b>12.0</b>	11.5	11.3

## GRAPHS

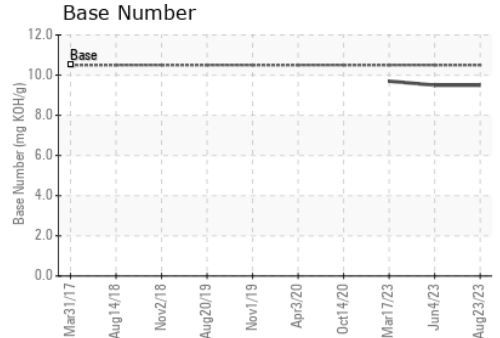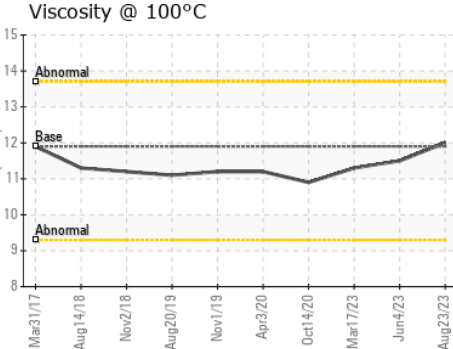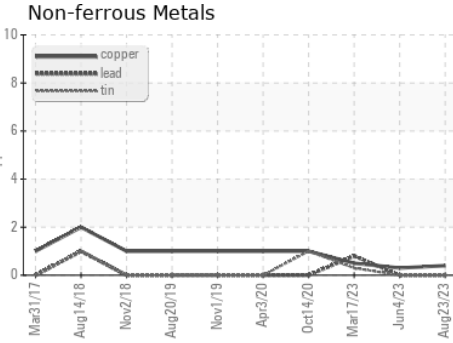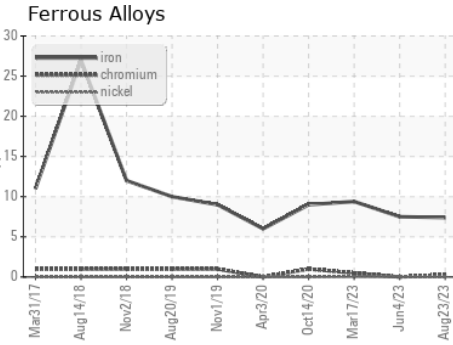

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004640 **Received** : 28 Aug 2023  
**Lab Number** : 05935941 **Diagnosed** : 29 Aug 2023  
**Unique Number** : 10621212 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)