



OIL ANALYSIS REPORT

Sample Rating Trend



VISUAL METAL



Machine Id
ASV LPDF00576 - RETURN

Component
Hydraulic System
Fluid
ASV (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. We were unable to perform a particle count due to metal particles present in this sample.

▲ Wear

The aluminum level is abnormal. Moderate concentration of visible metal present. High wear metal levels reflect the suspected failure.

Contamination

No other contaminants were detected in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	JCB000271	---	---
Sample Date	Client Info	27 Aug 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	21	---	---
Iron	ppm ASTM D5185m >20	17	---	---
Chromium	ppm ASTM D5185m >10	0	---	---
Nickel	ppm ASTM D5185m >10	<1	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m >10	▲ 16	---	---
Lead	ppm ASTM D5185m >10	3	---	---
Copper	ppm ASTM D5185m >75	5	---	---
Tin	ppm ASTM D5185m >10	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	---	---
Barium	ppm ASTM D5185m	1	---	---
Molybdenum	ppm ASTM D5185m	<1	---	---
Manganese	ppm ASTM D5185m	<1	---	---
Magnesium	ppm ASTM D5185m	3	---	---
Calcium	ppm ASTM D5185m	10	---	---
Phosphorus	ppm ASTM D5185m	91	---	---
Zinc	ppm ASTM D5185m	67	---	---
Sulfur	ppm ASTM D5185m	640	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	3	---	---
Sodium	ppm ASTM D5185m	0	---	---
Potassium	ppm ASTM D5185m >20	1	---	---

FLUID DEGRADATION



method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.22	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	▲ MODER	---	---
Yellow Metal	scalar *Visual NONE	NONE	---	---
Precipitate	scalar *Visual NONE	NONE	---	---
Silt	scalar *Visual NONE	NONE	---	---
Debris	scalar *Visual NONE	NONE	---	---
Sand/Dirt	scalar *Visual NONE	NONE	---	---
Appearance	scalar *Visual NORML	NORML	---	---
Odor	scalar *Visual NORML	NORML	---	---
Emulsified Water	scalar *Visual >0.1	NEG	---	---
Free Water	scalar *Visual	NEG	---	---







OIL ANALYSIS REPORT

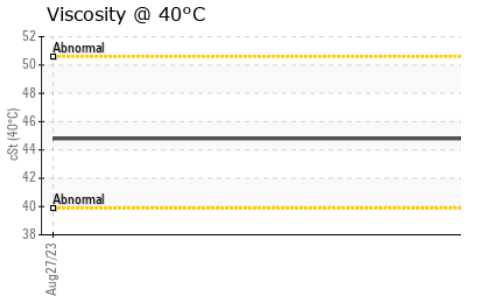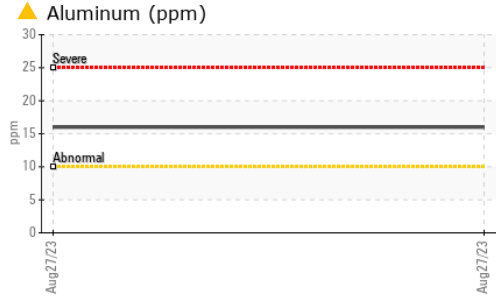

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

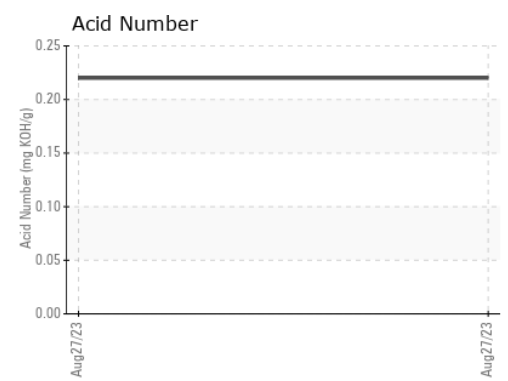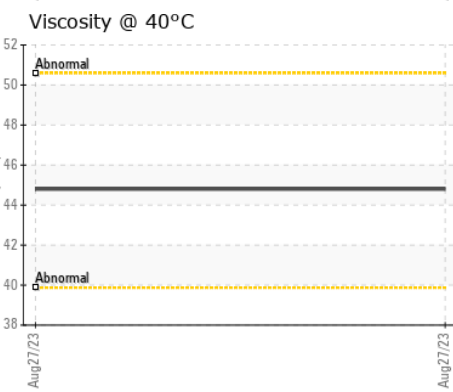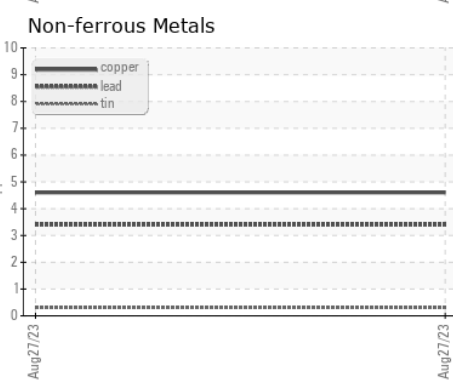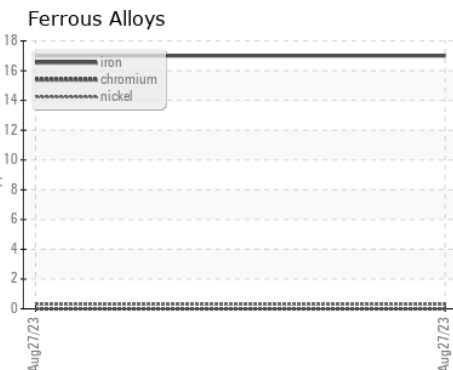

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JCB000271 **Received** : 28 Aug 2023
Lab Number : 05936059 **Diagnosed** : 31 Aug 2023
Unique Number : 10621330 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: PQ)

BRIGGS EQUIPMENT, INC
 2525 PHILLIPS HWY
 JACKSONVILLE, FL
 US 32207
 Contact: KEVIN PARRISH
 KEVIN.PARRISH@BRIGGSEQUIPMENT.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)