

# **PROBLEM SUMMARY**


# KAESER SM 15 8143286 (S/N 1267)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# Sample Rating Trend ISO

## **COMPONENT CONDITION SUMMARY**

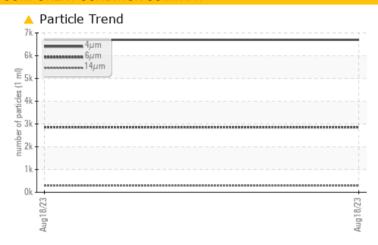

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |         |                 |  |     |  |  |  |  |
|--------------------------|--------------|---------|-----------------|--|-----|--|--|--|--|
| Sample Status            |              |         | <b>ABNORMAL</b> |  |     |  |  |  |  |
| Particles >6µm           | ASTM D7647   | >1300   | <b>2859</b>     |  |     |  |  |  |  |
| Particles >14µm          | ASTM D7647   | >80     | <b>290</b>      |  |     |  |  |  |  |
| Particles >21µm          | ASTM D7647   | >20     | <b>△</b> 68     |  | *** |  |  |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >/17/13 | A 20/19/15      |  |     |  |  |  |  |

Customer Id: NEWNEW01 Sample No.: KC05936128 Lab Number: 05936128 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

RT

Sample Rating Trend

ISO

A

Machine Id

# KAESER SM 15 8143286 (S/N 1267)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## ▲ Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                 |        |              |            |                      |          | \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ |
|-----------------|--------|--------------|------------|----------------------|----------|---------------------------------------|
|                 |        |              |            |                      |          |                                       |
|                 |        |              |            | Aug <sup>2</sup> 023 |          |                                       |
| SAMPLE INFORM   | MATION | method       | limit/base | current              | history1 | history2                              |
| Sample Number   |        | Client Info  |            | KC05936128           |          |                                       |
| Sample Date     |        | Client Info  |            | 18 Aug 2023          |          |                                       |
| Machine Age     | hrs    | Client Info  |            | 3474                 |          |                                       |
| Oil Age         | hrs    | Client Info  |            | 0                    |          |                                       |
| Oil Changed     |        | Client Info  |            | N/A                  |          |                                       |
| Sample Status   |        |              |            | ABNORMAL             |          |                                       |
| WEAR METALS     |        | method       | limit/base | current              | history1 | history2                              |
| Iron            | ppm    | ASTM D5185m  | >50        | 0                    |          |                                       |
| Chromium        | ppm    | ASTM D5185m  | >10        | 0                    |          |                                       |
| Nickel          | ppm    | ASTM D5185m  | >3         | <1                   |          |                                       |
| Titanium        | ppm    | ASTM D5185m  | >3         | 0                    |          |                                       |
| Silver          | ppm    | ASTM D5185m  | >2         | 0                    |          |                                       |
| Aluminum        | ppm    | ASTM D5185m  | >10        | 0                    |          |                                       |
| Lead            | ppm    | ASTM D5185m  | >10        | <1                   |          |                                       |
| Copper          | ppm    | ASTM D5185m  | >50        | 2                    |          |                                       |
| Tin             | ppm    | ASTM D5185m  | >10        | 0                    |          |                                       |
| Vanadium        | ppm    | ASTM D5185m  |            | 0                    |          |                                       |
| Cadmium         | ppm    | ASTM D5185m  |            | 0                    |          |                                       |
| ADDITIVES       |        | method       | limit/base | current              | history1 | history2                              |
| Boron           | ppm    | ASTM D5185m  |            | 0                    |          |                                       |
| Barium          | ppm    | ASTM D5185m  | 90         | 39                   |          |                                       |
| Molybdenum      | ppm    | ASTM D5185m  |            | 0                    |          |                                       |
| Manganese       | ppm    | ASTM D5185m  |            | 0                    |          |                                       |
| Magnesium       | ppm    | ASTM D5185m  | 90         | 72                   |          |                                       |
| Calcium         | ppm    | ASTM D5185m  | 2          | 2                    |          |                                       |
| Phosphorus      | ppm    | ASTM D5185m  |            | 2                    |          |                                       |
| Zinc            | ppm    | ASTM D5185m  |            | 4                    |          |                                       |
| CONTAMINANTS    | •      | method       | limit/base | current              | history1 | history2                              |
|                 |        |              |            |                      | TilStory | HIStory2                              |
| Silicon         | ppm    | ASTM D5185m  | >25        | 6                    |          |                                       |
| Sodium          | ppm    | ASTM D5185m  |            | 17                   |          |                                       |
| Potassium       | ppm    | ASTM D5185m  | >20        | 5                    |          |                                       |
| Water           | %      | ASTM D6304   | >0.05      | 0.029                |          |                                       |
| ppm Water       | ppm    | ASTM D6304   | >500       | 295.7                |          |                                       |
| FLUID CLEANLIN  | IESS   | method       | limit/base | current              | history1 | history2                              |
| Particles >4μm  |        | ASTM D7647   |            | 6700                 |          |                                       |
| Particles >6µm  |        | ASTM D7647   | >1300      | <u>^</u> 2859        |          |                                       |
| Particles >14μm |        | ASTM D7647   | >80        | <u>^</u> 290         |          |                                       |
| Particles >21µm |        | ASTM D7647   | >20        | <u>▲</u> 68          |          |                                       |
| Particles >38µm |        | ASTM D7647   | >4         | 2                    |          |                                       |
| Particles >71μm |        | ASTM D7647   | >3         | 0                    |          |                                       |
| Oil Cleanliness |        | ISO 4406 (c) | >/17/13    | <u>^</u> 20/19/15    |          |                                       |
| FLUID DEGRADA   | TION   | method       | limit/base | current              | history1 | history2                              |

Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.31



## **OIL ANALYSIS REPORT**





Certificate L2367

Sample No. Lab Number **Unique Number** Test Package

: KC05936128

: 05936128 : 10621399

Received Diagnosed Diagnostician

: 29 Aug 2023 : Doug Bogart NEWTON, NJ US 07860

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: IND 2

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: