




Machine Id 8043988 (S/N 1665) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

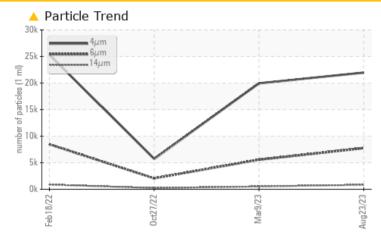

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBELMINTIO TEOTTIE					
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >6µm	ASTM D7647	>1300	<u> </u>	▲ 5565	<u> </u>
Particles >14µm	ASTM D7647	>80	<u> </u>	5 27	<u> </u>
Particles >21µm	ASTM D7647	>20	<u> </u>	1 85	4 3
Particles >38µm	ASTM D7647	>4	<u> </u>	1 6	3
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	1 /20/16	2 0/18/15


Customer Id: TRILODNJ Sample No.: KC100813 Lab Number: 05936138 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

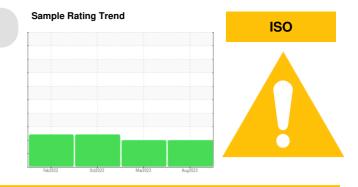

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



09 Mar 2023 Diag: Don Baldridge

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



27 Oct 2022 Diag: Don Baldridge



We recommend you service the filters on this component. Resample at the next service interval to monitor. The tin level has decreased, but is still abnormal. All other component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

18 Feb 2022 Diag: Jonathan Hester



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. The tin level is abnormal. All other component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

view report





OIL ANALYSIS REPORT

Sample Rating Trend ISO

Machine Id 8043988 (S/N 1665) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC100813	KC101919	KC106172
Sample Date		Client Info		23 Aug 2023	09 Mar 2023	27 Oct 2022
Machine Age	hrs	Client Info		4885	3884	3151
Oil Age	hrs	Client Info		1230	200	1700
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	4
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	<1	0	<1
Copper	ppm	ASTM D5185m	>50	6	2	11
Tin	ppm	ASTM D5185m	>10	10	3	1 1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	26	83	17
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	60	86	50
Calcium	ppm	ASTM D5185m	2	<1	3	0
Phosphorus	ppm	ASTM D5185m		3	2	9
Zinc	ppm	ASTM D5185m		12	2	18
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	2
Sodium	ppm	ASTM D5185m		13	10	7
Potassium	ppm	ASTM D5185m	>20	3	<1	2
Water	%	ASTM D6304	>0.05	0.028	0.013	0.020
ppm Water	ppm	ASTM D6304	>500	282.0	139.5	207.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		21967	19943	5730
Particles >6µm		ASTM D7647	>1300	🔺 7759	▲ 5565	<u> </u>
Particles >14µm		ASTM D7647	>80	<u> </u>	<mark>▲</mark> 527	A 230
Particles >21µm		ASTM D7647	>20	<u> </u>	1 85	4 3
Particles >38µm		ASTM D7647	>4	<u> </u>	1 6	3
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/20/17	1 /20/16	▲ 20/18/15
	TION	una a tha a al	line it /le e e e		In the term of	In the term of the
FLUID DEGRADA		method	limit/base	current	history1	history2



(B/HOX Ê0.3 Ê 0.20 Pio 0.1

1.20

0.9

<u>له</u>0.72

2²0.48

0.24

52

50

48 (J-046 tsp 44

47

4(

3

Ĕ.

OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

method

*Visual

*Visual

*Visual

*Visual

*Visual

*Visua *Visual

*Visual

scalar *Visual

scalar *Visual

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.05

current

LIGHT

NONE

NONE

NONE

LIGHT


NONE


NORML

NORML

NEG

NEG

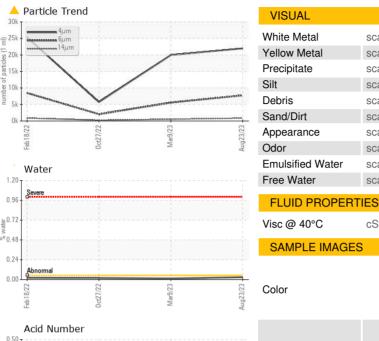

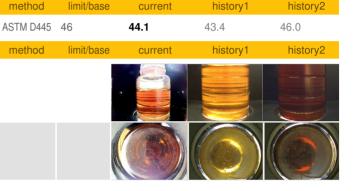

history1

LIGHT

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

NEG

NEG

history2

NONE

NONE

NONE

NONE

LIGHT

NONE


NORML

NORML

NEG

NEG

Bottom

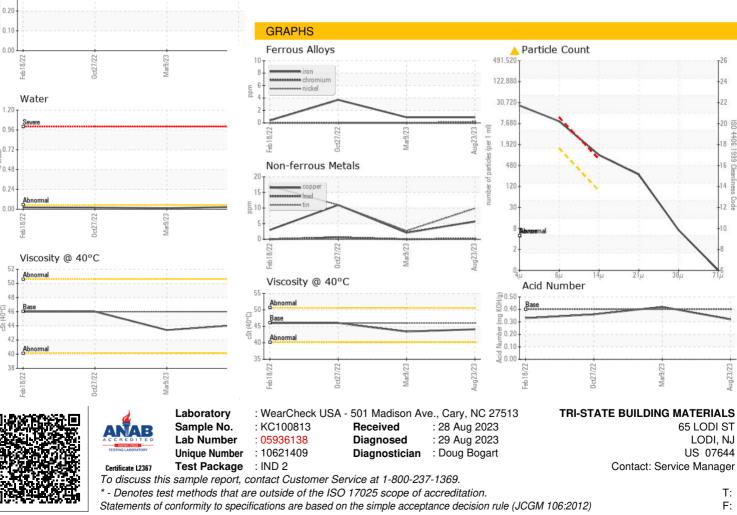

Contact/Location: Service Manager - TRILODNJ