


PROBLEM SUMMARY

MOBIL ARTIC 300 3/FB04134 (S/N MK4CWRV255/16531918)


Refrigeration Compressor

MOBIL GARGOYLE ARTIC 300 (165 GAL)





COMPONENT CONDITION SUMMARY

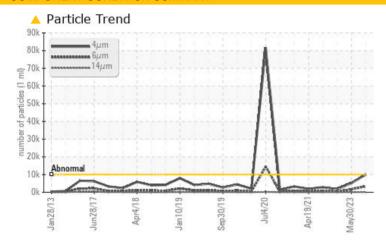

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC TEST R | ESULTS | | | | | |
|--------------------|--------------|-----------|-----------------|---------------|----------|--|
| Sample Status | | | ABNORMAL | ATTENTION | NORMAL | |
| Particles >6μm | ASTM D7647 | >1300 | 4 3375 | <u>▲</u> 1605 | 383 | |
| Oil Cleanliness | ISO 4406 (c) | >20/17/14 | 20/19/14 | 20/18/14 | 18/16/11 | |

Customer Id: HORFREWC Sample No.: WC0826143 Lab Number: 05936171 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

30 May 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



08 Oct 2021 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



28 Jul 2021 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






OIL ANALYSIS REPORT

MOBIL ARTIC 300 3/FB04134 (S/N MK4CWRV255/16531918)

Refrigeration Compressor

MOBIL GARGOYLE ARTIC 300 (165 GAL)





DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMA | ATION | method | limit/base | current | history1 | history2 |
|-----------------|-------|--------------|------------|-------------------|-------------------|-------------|
| Sample Number | | Client Info | | WC0826143 | WC0808493 | WC0592466 |
| Sample Date | | Client Info | | 11 Aug 2023 | 30 May 2023 | 08 Oct 2021 |
| | hrs | Client Info | | 166713 | 0 | 0 |
| _ | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | ABNORMAL | ATTENTION | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | 0 | 0 | 3 |
| Chromium | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | <1 | 0 | <1 |
| | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| | ppm | ASTM D5185m | >8 | 0 | 0 | 0 |
| | ppm | ASTM D5185m | >4 | 0 | 0 | <1 |
| | ppm | ASTM D5185m | | | | 0 |
| | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | <1 |
| | ppm | ASTM D5185m | | 1 | 0 | 0 |
| | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | <1 | 0 | 0 |
| , | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | 0 | 0 | 16 |
| | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | 76 | 58 | 296 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| | ppm | ASTM D5185m | >15 | 0 | 0 | <1 |
| | ppm | ASTM D5185m | 710 | 0 | 0 | 0 |
| | ppm | ASTM D5105m | >20 | <1 | 1 | 0 |
| | % | ASTM D6304 | >0.01 | 0.00 | 0.001 | 0.003 |
| | ppm | ASTM D6304 | >100 | 0.00 | 7.2 | 38.4 |
| FLUID CLEANLINE | | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 9956 | 5195 | 1749 |
| Particles >6µm | | ASTM D7647 | >1300 | 3375 | <u></u> 1605 | 383 |
| Particles >14µm | | ASTM D7647 | >160 | 151 | 91 | 18 |
| Particles >21µm | | ASTM D7647 | >40 | 22 | 18 | 1 |
| Particles >38µm | | ASTM D7647 | >10 | 1 | 2 | 0 |
| Particles >71µm | | ASTM D7647 | | 0 | 1 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >20/17/14 | <u>^</u> 20/19/14 | <u>^</u> 20/18/14 | 18/16/11 |
| FLUID DEGRADAT | ION | method | limit/base | current | history1 | history2 |
| | | | | | | ,_ |



OIL ANALYSIS REPORT

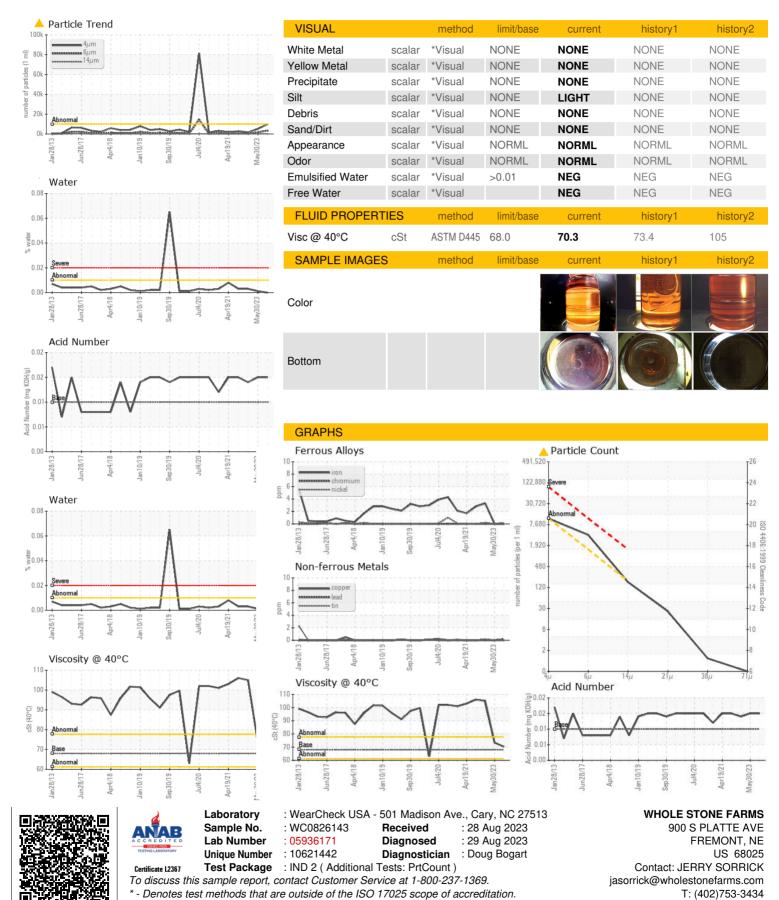

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x:

T: (402)753-3434