



PROBLEM SUMMARY

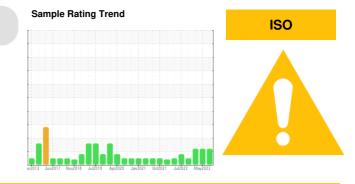

Machine Id **11/FB07914 (S/N K68842)** Component

Refrigeration Compressor Fluid MOBIL GARGOYLE ARTIC 300 (105 GAL)

COMPONENT CONDITION SUMMARY

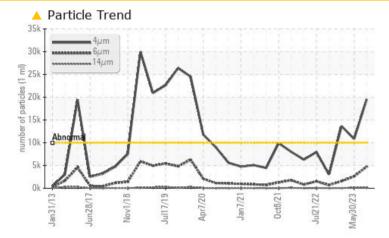

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS				
Sample Status			ABNORMAL	ABNORMAL	ATTENTION
Particles >4µm	ASTM D7647	>10000	🔺 19546	1 0837	▲ 13621
Particles >6µm	ASTM D7647	>1300	4746	<u> </u>	1 572
Oil Cleanliness	ISO 4406 (c)	>20/17/14	<u> </u>	A 21/19/14	<u> </u>

Customer Id: HORFREWC Sample No.: WC0826177 Lab Number: 05936179 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED AC	TIONS			
Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS



30 May 2023 Diag: Don Baldridge

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

view report

02 Feb 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

18 Nov 2022 Diag: Jonathan Hester

Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.










OIL ANALYSIS REPORT

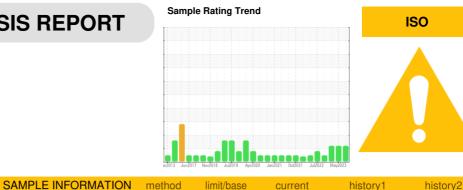

Machine Ic

11/FB07914 (S/N K68842) Component **Refrigeration Compressor**

Fluid MOBIL GARGOYLE ARTIC 300 (105 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Sample Number Sample Date Machine Age Oil Age	hrs	Client Info Client Info Client Info		WC0826177 11 Aug 2023	WC0808518 30 May 2023	WC0691490 02 Feb 2023
Machine Age Oil Age	hrs			11 Aug 2023	30 May 2023	02 Feb 2023
Dil Age	hrs	Client Info				
-				124440	0	0
Oil Changed	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	10	15	18
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	<1	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		<1	0	<1
Zinc	ppm	ASTM D5185m		2	<1	0
Sulfur	ppm	ASTM D5185m		264	304	213
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	1	1	0
Water	%	ASTM D6304	>0.01	0.003	0.003	0.009
ppm Water	ppm	ASTM D6304	>100	30.2	36.8	91.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	A 19546	1 0837	1 3621
Particles >6µm		ASTM D7647	>1300	<u> </u>	A 2605	A 1572
Particles >14µm		ASTM D7647	>160	114	123	37
Particles >21µm		ASTM D7647	>40	15	11	7
Particles >38µm		ASTM D7647	>10	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
		ISO 4406 (c)	>20/17/14	A 21/19/14	▲ 21/19/14	1 21/18/12
Oil Cleanliness						
Oil Cleanliness FLUID DEGRADA		method	limit/base	current	history1	history2





Acid Number

0.08

OIL ANALYSIS REPORT

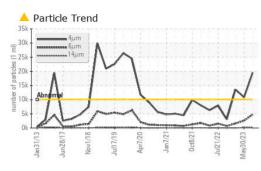

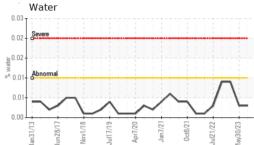

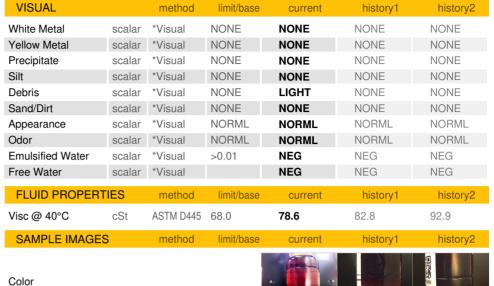

00101



Bottom

