
PROBLEM SUMMARY



Component Auxiliary Winch Fluid GEAR OIL ISO 220 (--- GAL)

COMPONENT CONDITION SUMMARY

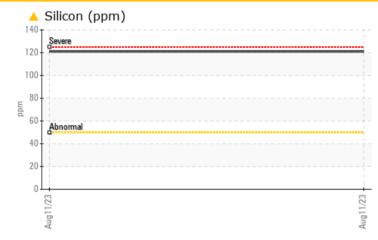

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL				
Silicon	ppm	ASTM D5185m	>50	<u> </u>				

Customer Id: SEALAF Sample No.: WC0798220 Lab Number: 05936256 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



Area [L432037]

1463204

OIL ANALYSIS REPORT

Sample Rating Trend



Component Auxiliary Winch Fluid GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0798220		
Sample Date		Client Info		11 Aug 2023		
Machine Age	yrs	Client Info		0		
Oil Age	yrs	Client Info		0		
Oil Changed	J -	Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	44		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m	>10	۰ <1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>50	24		
Tin	ppm	ASTM D5185m	>10	_+ <1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	6		
Barium	ppm	ASTM D5185m	15	0		
Molybdenum	ppm	ASTM D5185m	15	<1		
Manganese	ppm	ASTM D5185m		1		
Magnesium	ppm	ASTM D5185m	50	2		
Calcium	ppm	ASTM D5185m	50	3		
Phosphorus	ppm	ASTM D5185m	350	356		
Zinc	ppm	ASTM D5185m	100	15		
Sulfur	ppm	ASTM D5185m	12500	10036		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1 21		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.25		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
:24:51) Rev: 1					on: TONY VALL	



OIL ANALYSIS REPORT



Contact/Location: TONY VALLERY - SEALAF