

OIL ANALYSIS REPORT

COMPRESSOR STATIONS/ROSS DRAW AREA **DOVE (S/N LE11333)** Component

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

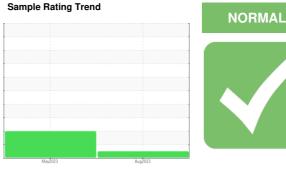






SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60001245	TO60000850	
Sample Date		Client Info		09 Aug 2023	05 May 2023	
Machine Age	hrs	Client Info		2817	4320	
Oil Age	hrs	Client Info		4320	4320	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	1	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m		<1	<1	
Titanium	ppm	ASTM D5185m		0	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	<1	0	
Lead	ppm	ASTM D5185m	>25	0	0	
Copper	ppm	ASTM D5185m	>50	<1	0	
Tin	ppm	ASTM D5185m	>15	<1	<1	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	0	2	<1	
Calcium	ppm	ASTM D5185m	0	0	2	
Phosphorus	ppm	ASTM D5185m	0	3	4	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	0	34	71	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	14	
Sodium	ppm	ASTM D5185m		2	6	
Potassium	ppm	ASTM D5185m	>20	2	<1	
Water	%	ASTM D6304	>2.26	0.266	0.298	
ppm Water	ppm	ASTM D6304	>22600	2662.1	2980	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	933	139284	
Particles >6µm		ASTM D7647	>1300	248	51371	
Particles >14µm		ASTM D7647	>320	18	1 517	
Particles >21µm		ASTM D7647	>80	7	1 58	
Particles >38µm		ASTM D7647	>20	0	3	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/17/15	17/15/11	▲ 24/23/18	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.089	0.105	



OIL ANALYSIS REPORT

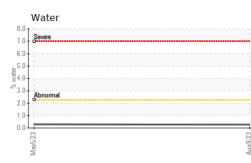



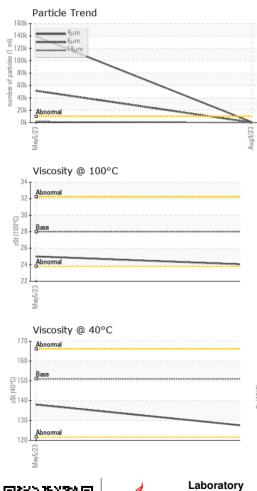

56

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	LIGHT	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
CZ6 Appearance	scalar	*Visual	NORML	NORML	NORML	
Ouoi	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>2.26	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	151	127	138	
Visc @ 100°C	cSt	ASTM D445	28	24.0	25.0	
Viscosity Index (VI)	Scale	ASTM D2270	224	222	215	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						no image
Bottom						no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count	t	T 26
60 8- iron						
E 6 4			122,880	Severe		-24
			30,720			-22
			7,680	Abnormal T		20 20
May5/23			Aug9/23 4 (per 1 ml)		-	1 4400
			Au Au			+10 5:1999
Non-ferrous Meta	ls		CZ/6 ^{Dn} F EZ/6 ^{Dn} F 1.920 480 120			-20 ISO 4406:1999 Cleamliness Code -18 -14 -14 -14 -14 -14 -14 -14 -14 -14 -14
8 copper			ja 120			-14 meg
			E 30		\	-12 Code
2						
0		*****	8	1	1	+10
May5/23			Aug9/23	-		-8
Ma			Pan Au	ŧυ 6υ	14µ 21µ	38µ 71µ
Viscosity @ 40°C				Acid Number		с <i>эр</i> р.
160 - 🥇			P 0.15 HO	T		
© 150 - Base 0 150 - Base 3 140			B 0.10			
			ja E 0.05			
Abnormal			0.15 0.10 0.10 0.00 0.00 0.00			
May5/23			Aug9/23	May5/23 -		Aug9/23 -
May			Aug	Ma		Aug
Lab Number : 05936652	Received Diagnos Diagnos ests: KF,	d : 28 / ed : 29 / tician : Ang KV100, Prt0	Aug 2023 Aug 2023 gela Borella Count, VI)			PIONS DRIVE MIDLAND, TX US 79706 RMAN GARZA

To discuss this sample report, * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Certificate L2367

F:

T: (432)686-3600