

OIL ANALYSIS REPORT

Sample Rating Trend



[6043595] Machine Id BD1797 (S/N CP005819)

Component Compressor Fluid TULCO LUBSOIL LPG WS 150 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			Apr2023	Aug2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60001260	TO60000838	
Sample Date		Client Info		07 Aug 2023	11 Apr 2023	
Machine Age	hrs	Client Info		21514	18856	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m		0	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	<1	0	
Lead	ppm	ASTM D5185m	>25	0	0	
Copper	ppm	ASTM D5185m	>50	<1	0	
Tin	ppm	ASTM D5185m	>15	<1	0	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	0	<1	0	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	7	4	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	0	39	24	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	
Sodium	ppm	ASTM D5185m		0	1	
Potassium	ppm	ASTM D5185m	>20	0	<1	
Water	%	ASTM D6304	>2.26	0.637	0.527	
ppm Water	ppm	ASTM D6304	>22600	6378.8	5270	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1724	8936	
Particles >6µm		ASTM D7647	>1300	280	1 879	
Particles >14µm		ASTM D7647	>320	16	47	
Particles >21µm		ASTM D7647	>80	6	9	
Particles >38µm		ASTM D7647	>20	0	1	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/17/15	18/15/11	▲ 20/18/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.087	0.126	



OIL ANALYSIS REPORT





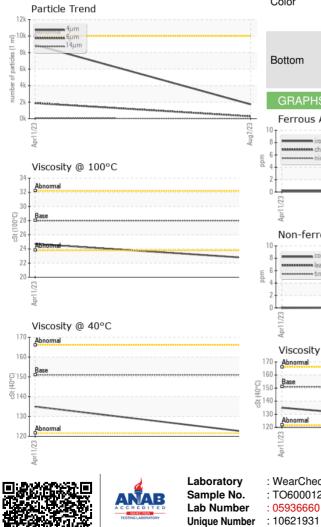

VISUAL		method	limit/base	current	history1	history2
Vhite Metal	scalar	*Visual	NONE	NONE	NONE	
ellow Metal	scalar	*Visual	NONE	NONE	NONE	
recipitate	scalar	*Visual	NONE	NONE	NONE	
filt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	LIGHT	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
ppearance	scalar	*Visual	NORML	NORML	NORML	
Ddor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>2.26	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D445	151	122	135	
/isc @ 100°C	cSt	ASTM D445	28	22.7	24.7	
/iscosity Index (VI)	Scale	ASTM D2270	224	216	217	
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						no image
						no imago
					LEN	
Bottom					- Roan	no image
GRAPHS						
Ferrous Alloys				Particle Count	:	
			491,52	^D T		T ²⁶
iron chromium			122,88	0-Severe		-24
Personana nickel			30,72			-22
				Abnormal		and the second second
/23			EZ = 7,68			-20
Apr1 1/23			Aug7/23 (per 1 ml			-18
Non-ferrous Metal	s		<u>영</u> 관			16
[]			of pa			
copper						
tin			3	D-		-12
				8-		-10
					/	
Apr1 1/23			Aug7/23	2-		18
			A	0 4µ Бµ	14µ 21µ	38µ 71µ
Viscosity @ 40°C			(no.)	Acid Number		
1			0.1 400 HQJ 0.0 Number 0.0 0.0			
Base			e.1	0 +		
			0.0 g	5		
Abnormal			N ICE			
1/23			Aug7/23	1/23		2012
Apr11/23			Aug	Apr11/23		20/Luny
WearCheck USA - 5			•	3 MIDLA	ND - EOG RES	
	Receive		Aug 2023		5509 CHAM	PIONS DRIV
	Diagnos		Aug 2023			MIDLAND, T
10621931	Diagnost		jela Borella			US 7970

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

Certificate L2367

Contact/Location: HERMAN GARZA - EOGMID

F:

T: (432)686-3600

Contact: HERMAN GARZA