


PROBLEM SUMMARY


Area [6043126] **BD1744 (S/N CP005774)**

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)

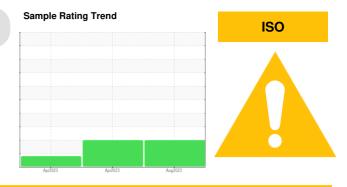

COMPONENT CONDITION SUMMARY

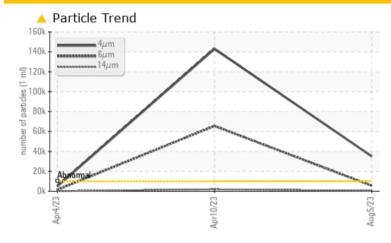

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ATTENTION				
Particles >4µm	ASTM D7647	>10000	<u>\$\text{\$\exitt{\$\text{\$\}}}}\$}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}</u>	<u>143010</u>	4950				
Particles >6µm	ASTM D7647	>1300	5527	<u>▲</u> 65577	<u>▲</u> 1474				
Particles >14µm	ASTM D7647	>320	485	1 961	153				
Particles >21µm	ASTM D7647	>80	<u> </u>	<u> </u>	46				
Oil Cleanliness	ISO 4406 (c)	>20/17/15	<u>22/20/16</u>	<u>4</u> 24/23/18	1 9/18/14				

Customer Id: EOGMID Sample No.: TO60001255 Lab Number: 05936663 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

10 Apr 2023 Diag: Angela Borella





No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



04 Apr 2023 Diag: Angela Borella





No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






OIL ANALYSIS REPORT

Area [6043126] BD1744 (S/N CP005774)

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)





DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60001255	TO60000840	TO60000835
Sample Date		Client Info		05 Aug 2023	10 Apr 2023	04 Apr 2023
Machine Age	hrs	Client Info		24920	36491	22081
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Filtered	Filtered
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	3	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	0
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	0	0	<1	<1
Calcium	ppm	ASTM D5185m	0	0	2	<1
Phosphorus	ppm	ASTM D5185m	0	7	87	17
Zinc	ppm	ASTM D5185m	0	0	<1	0
Sulfur	ppm	ASTM D5185m	0	150	924	238
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	<1
Sodium	ppm	ASTM D5185m		0	23	12
Potassium	ppm	ASTM D5185m	>20	0	3	2
Water	%	ASTM D6304	>2.26	0.539	0.877	0.391
ppm Water	ppm	ASTM D6304	>22600	5396.7	8770	3910
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u>^</u> 35081	<u> </u>	4950
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u>▲</u> 65577	<u>▲</u> 1474
Particles >14μm		ASTM D7647	>320	485	<u> </u>	153
Particles >21µm		ASTM D7647	>80	<u> 161</u>	<u> 186</u>	46
Particles >38µm		ASTM D7647	>20	10	3	2
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/17/15	<u>22/20/16</u>	<u>4</u> 24/23/18	▲ 19/18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	ACTM DODAE		0.16	0.00	

Acid Number (AN)

mg KOH/g ASTM D8045


0.33

0.16

0.11



OIL ANALYSIS REPORT

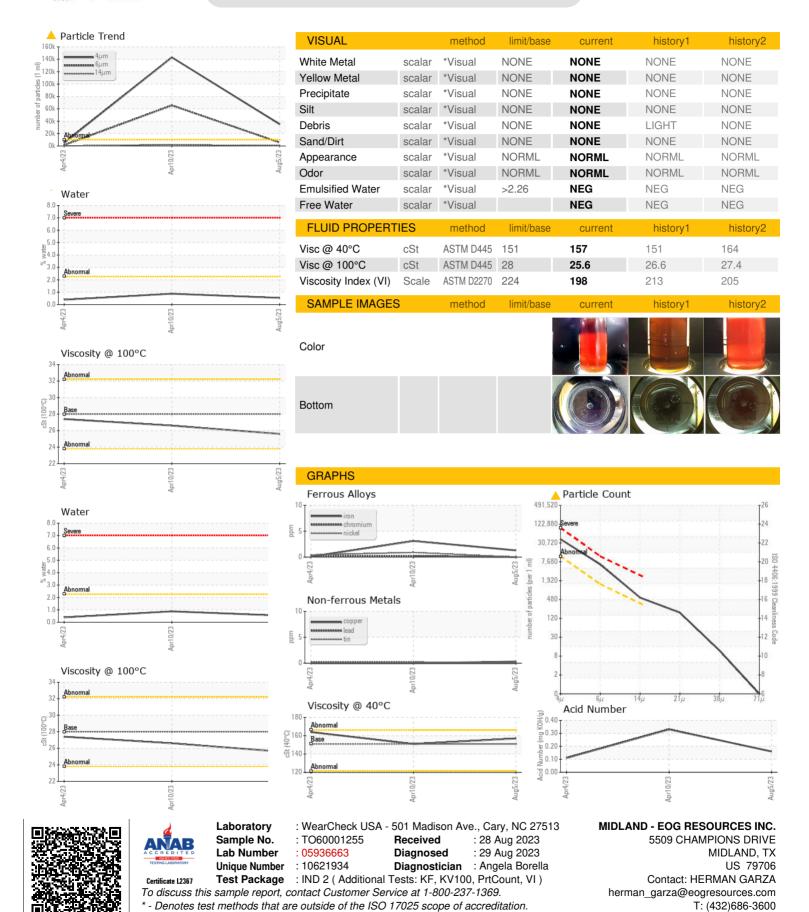

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: